

RSS110024**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

Similar to illustration

Individual relays for TERMSERIES

- Electromechanical relays
- Different contact materials

General ordering data

Version	TERMSERIES, Relay, Number of contacts: 1, CO contact AgSnO, Rated control voltage: 24 V DC, Continuous current: 6 A, Plug-in connection
Order No.	1984090000
Type	RSS110024
GTIN (EAN)	4050118377910
Qty.	20 pc(s).

Creation date March 26, 2021 7:17:41 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

RSS110024

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	15 mm	Depth (inches)	0.591 inch
Height	28 mm	Height (inches)	1.102 inch
Net weight	5 g	Width	5 mm
Width (inches)	0.197 inch		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
---------------------	----------------	-----------------------	----------------

Rated data UL

Certificate No. (cURus)	E223474
-------------------------	---------

Control side

Coil resistance	3388 $\Omega \pm 10\%$	Power rating	170 mW
Pull-in/drop-out voltage, typ.	16.8 V / 2.4 V DC	Rated control voltage	24 V DC
Rated current DC	4.6 mA		

Load side

AC switching capacity (resistive), max.	1500 VA	DC switching capacity (resistive), max.	144 W @ 24 V
Inrush current	30 A / 20 ms	Max. switching frequency at rated load	0.1 Hz
Max. switching voltage, AC	250 V	Max. switching voltage, DC	250 V
Min. switching power	100 mA @ 12 V	Switch-off delay	≤ 4 ms
Switch-on delay	≤ 8 ms		

Contact data

Contact type	1 CO contact (AgSnO)
--------------	----------------------

General data

Test button	No	Mechanical switch position indicator	No
Colour	white		

Insulation coordination

Creepage and clearance distance input – output	≥ 5.5 mm	Dielectric strength of open contact	1 kV _{eff} / 1 min
Dielectric strength, Input/Output	4 kV _{eff} / 1 Min.	Impulse withstand voltage	6 kV (1.2/50 μ s)
Protection degree	IP67		

Further details of approvals / standards

Certificate No. (VDE)	40029391	Certificate No. (cURus)	E223474
-----------------------	----------	-------------------------	---------

Connection data

Wire connection method	Plug-in connection
------------------------	--------------------

RSS110024

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Classifications

ETIM 6.0	EC001437	ETIM 7.0	EC001437
ECLASS 9.0	27-37-16-01	ECLASS 9.1	27-37-16-01
ECLASS 10.0	27-37-16-01	ECLASS 11.0	27-37-16-01

Approvals

Approvals



ROHS	Conform
UL File Number Search	E223474

Downloads

Engineering Data	STEP
Engineering Data	WSCAD

Data sheet


RSS110024

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com


Drawings

Wiring diagram

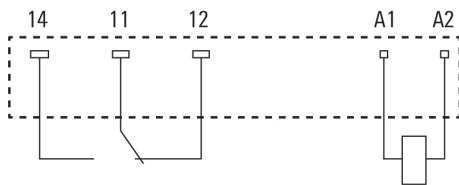


View of Pins from below

Graph

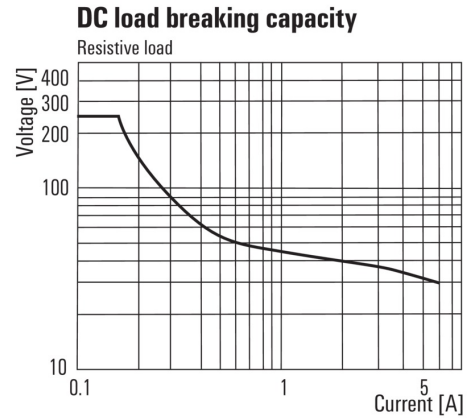

DC load limit curve

Dimensional drawing

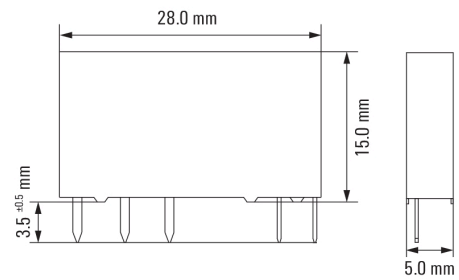

RSS110024

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Miscellaneous

Type code	RSS				
Type	RSS				
Type of construction	1 Vertical, washable				
Type of contact	1 1 Changeover contact				
Contact material	0 AgSnO2 2 AgNi hard gold plated 3 AgNi				
					Coil 005 5 V DC 012 12 V DC 024 24 V DC 048 48 V DC 060 60 V DC

Type codes