


UR20-FBC-MOD-TCP

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Product image



More performance. Simplified. u-remote.

Weidmüller u-remote – our innovative remote I/O concept with IP 20 which focuses purely on user benefits: tailored planning, faster installation, safer start-up, no more downtime. For considerably improved performance and greater productivity.

Reduce the size of your cabinets with u-remote, thanks to the narrowest modular design on the market and the need for fewer power-feed modules. Our u-remote technology also offers tool-free assembly, while the modular "sandwich" design and integrated web server speed up installation, both in the cabinet and machine. Status LEDs on the channel and each u-remote module enable reliable diagnosis and rapid service.

This and many other amazing ideas boost the availability of your machines and systems. And ensure smooth processes too. From planning to operation.

u-remote stands for "More Performance". Simplified

General ordering data

Version	Remote I/O fieldbus coupler, IP20, Ethernet, Modbus/TCP
Order No.	1334930000
Type	UR20-FBC-MOD-TCP
GTIN (EAN)	4050118138153
Qty.	1 pc(s).
Delivery status	This article will no longer be available in the future.
Available until	2019-05-01
Alternative product	2476450000

UR20-FBC-MOD-TCP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	76 mm	Depth (inches)	2.992 inch
Height	120 mm	Height (inches)	4.724 inch
Mounting dimension - height	128 mm	Net weight	320 g
Weight	247 g	Width	52 mm
Width (inches)	2.047 inch		

Temperatures

Storage temperature	-40 °C ... +85 °C	Operating temperature	-20 °C ... +60 °C
---------------------	-------------------	-----------------------	-------------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Connection data

Type of connection	PUSH IN	Wire connection cross section, finely stranded, max.	1.5 mm ²
Wire connection cross section, finely stranded, min.	0.14 mm ²	Wire cross-section, finely stranded, max. (AWG)	AWG 16
Wire cross-section, finely stranded, min. (AWG)	AWG 26	Wire cross-section, solid, max.	1.5 mm ²
Wire cross-section, solid, max. (AWG)	AWG 16	Wire cross-section, solid, min.	0.14 mm ²
Wire cross-section, solid, min. (AWG)	AWG 26		

General data

Air humidity (operation)	10% to 95%, non-condensing as per DIN EN 61131-2			
Air humidity (storage)	10% to 95%, non-condensing as per DIN EN 61131-2			
Air humidity (transport)	10% to 95%, non-condensing as per DIN EN 61131-2			
Air pressure (operation)	≥ 795 hPa (height ≤ 2000 m) as per DIN EN 61131-2			
Air pressure (storage)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2			
Air pressure (transport)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2			
Pollution severity	2			
Rail	TS 35			
Restricted area	Positive expansion	X coordinate	83.5 mm	
		Z coordinate	85 mm	
		Y coordinate	160 mm	
	Negative expansion	Type of restricted area		thermal
		Z coordinate	0 mm	
		Y coordinate	-40 mm	
X coordinate	-28 mm			
Shock	15 g over 11 ms, half sinus wave, acc. to IEC 60068-2-27			
Surge voltage category	II			
Test voltage	500 V			
UL 94 flammability rating	V-0			
Vibration resistance	5 Hz ≤ f ≤ 8.4 Hz: 3.5-mm amplitude as per IEC 60068-2-6, 8.4 Hz ≤ f ≤ 150 Hz: 1 g acceleration as per IEC 60068-2-6			

Power supply

Current consumption from I _{IN} (power segment of the field bus coupler), typ.	112 mA
---	--------

UR20-FBC-MOD-TCP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Current consumption from I _{IN} (power segment of the fieldbus coupler), typ.	min.	112 mA
	nominal	112 mA
	max.	112 mA
Feed current for I _{IN} (input current path)	max.	10,000 mA
	nominal	10,000 mA
	min.	10,000 mA
Feed current for I _{IN} (input current path), max.	10 A	
Feed current for I _{OUT} (output current path)	nominal	10,000 mA
	min.	10,000 mA
	max.	10,000 mA
Feed current for I _{OUT} (output current path), max.	10 A	
Feed current for the system, max.	4 A	
Supply voltage for outputs	24 V DC +20 %/ -15 %	
Supply voltage system and inputs	24 V DC +20 %/ -15 %	
Voltage supply	24 V DC +20 %/ -15 %, via the system bus	

System data

Connection type	2 x RJ45 plug-in connectors	Diagnostic data	1,024 Byte
Field bus protocol	Modbus/TCP	Galvanic isolation	Yes, between field and system bus
Interface	u-remote system bus	Module type	Bus coupler
Parameter data	1,024 Byte	Process data	8 kByte
Transmission rate of field bus, max.	100 Mbit/s	Transmission speed of system bus, max.	48 Mbit/s
max. number of modules	64 ST		

Classifications

ETIM 6.0	EC001603	ETIM 7.0	EC001603
ECLASS 9.0	27-24-26-07	ECLASS 9.1	27-24-26-07
ECLASS 10.0	27-24-26-07	ECLASS 11.0	27-24-26-07

UR20-FBC-MOD-TCP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Tender specification sheets

Long specification

Modbus TCP fieldbus coupler with integrated 2-port switch, 100 Mbit/s for digital and analogue signals. The field bus coupler recognises the installed modules and uses them to generate a process image. The module sequence is not relevant. The field bus coupler is integrated into an application as a Modbus TCP I/O device. Connection system: PUSH-IN terminal Transmission medium: Fieldbus transmission rate: 100 Mbit Transmission rate of the u-remote system bus: 48 Mbit Bus interface: 2 x RJ45 Voltage supply: 24 VDC +25% / -15% Feed-in current for system: 4 A Feed-in current for input modules: 10 A Feed-in current for output modules: 10 A Internal current consumption: 112 mA Process data: 8 kByte Parameter data: 1024 bytes Diagnostic data: 1024 bytes Number of I/O points: Number of I/O stations: Number of modules: max. 64 Protocol: Modbus TCP Start-up aid: web server Configuration interface: USB Protection degree: IP20 Mounting position: horizontal, vertical with derating - see manual Power supply efficiency: Potential separation: between system path, input and output paths Current via power contacts: 10 A on input and on output paths Storage temperature: -40°C - +85°C Operating temperature: -20°C - +60°C Relative humidity: 10% - 90%, non-condensing Weight: 220 g Dimensions (WxHxD): 52 mm x 120 mm x 76 mm Approvals: UL, Ex, Brand: Weidmüller Type: UR20-FBC-MOD

UR20-FBC-MOD-TCP

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS	Conform
UL File Number Search	E141197

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	STEP Schneider - UnityProS
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Product Change Notification	Release-Notes - Firmware and Supported modules list
Software	WI-Manager, DTM-Library for online installation V.1.2.2 Language Pack UR20_FBC Archiv Firmware files Modbus coupler Current Firmware file Modbus coupler USB driver
User Documentation	MAN_U-REMOTE_DE MAN_U-REMOTE_EN MAN_UR20_WEBSERVER_DE MAN_UR20_WEBSERVER_EN


UR20-FBC-MOD-TCP

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Block diagram

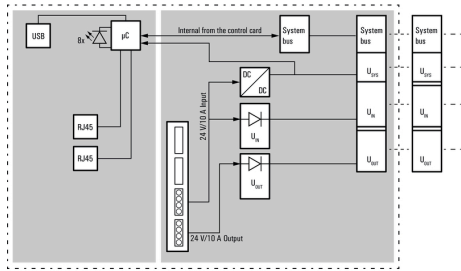

Connection diagram

