



### Main

Range of product	Modicon Quantum automation platform
Product or component type	Analogue safety input module
Type of filter	Single pole low pass - 3 dB at 15 Hz

### Complementary

Analogue input number	8
Addressing requirement	13 input words
Analogue input resolution	16 bits
Linear measuring range	0...25 mA
Absolute maximum input	35 mA
Input impedance	287 Ohm
Absolute accuracy error	+/- 0.35 % of full scale maximum +/- 0.3 %
Linearity error	+/- 2 µA max at 0...60 °C
Common mode rejection	-70 dB 50 Hz -65 dB 60 Hz
Isolation between channels and bus	1500 V AC for 60 s
Isolation between channels	500 V AC for 60 s
Update time	15 ms
Fault type	Overtacking scale
Marking	CE
Local signalling	8 LEDs red system failure, diagnostic of internal channel fault 8 LEDs green input status 1 LED red external fault detected (F) 1 LED green bus communication is present (Active)
Bus current requirement	400 mA
Power dissipation in W	3.5 W

### Environment

Product certifications	CSA CSA HazLoc C-Tick TÜV Rheinland (SIL2) UL
------------------------	---


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0749 - <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available <a href="#">Download Product Environmental</a>
Product end of life instructions	Need no specific recycling operations

Racks for Modules Mounting


Dimensions of Modules and Racks

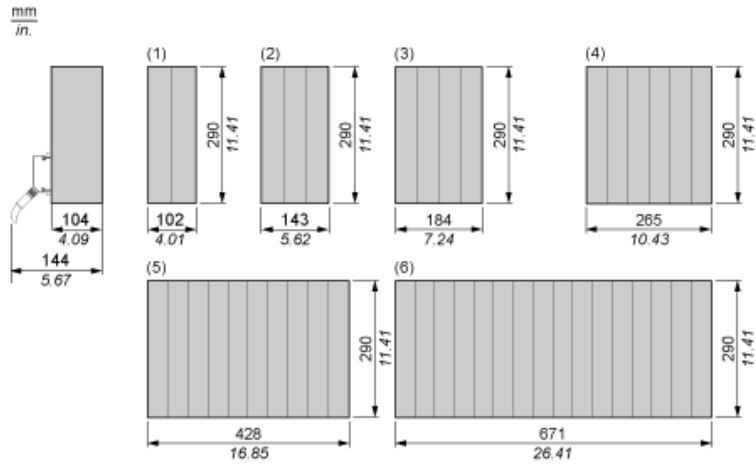

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

16 Bits 4-20 mA, 8-Channel Current Analog Input Module

Wiring Diagram

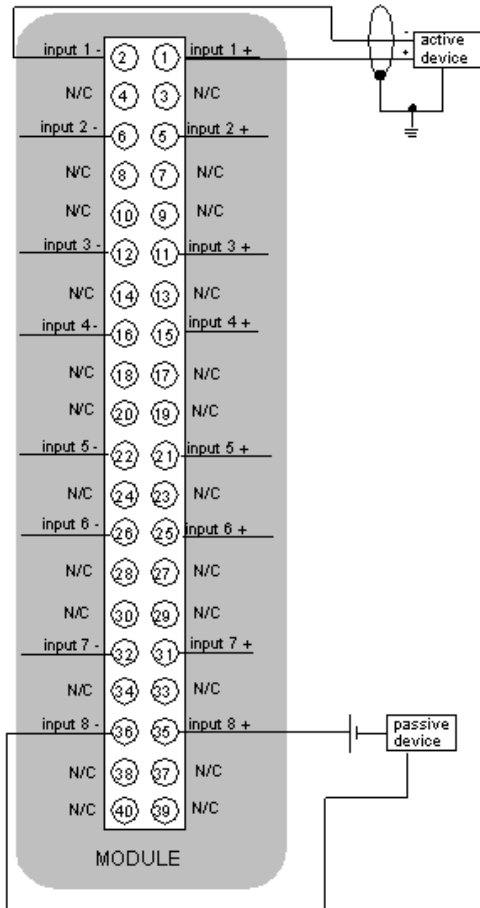

N/C: No Connected

- internal input impedance: 287 Ohm
- $R_{min}$  of the passive device: 913 Ohm
- $R_{max}$  of the passive device: 7713 Ohm