



Main

Range of product	Modicon Premium Automation platform
Product or component type	Multi axis control module
Product specific application	SERCOS digital servo drives
Number of channels	32
Number of axis	16 configurable
Path function	Following of auxiliary axes Simple linear
Communication network type	SERCOS 2
Structure type	Industrial conforming to EN 61491

Complementary

Set of axes	4 coordinated 4 followers
Cam profile	7
Topology	Ring
Transmission support medium	Fiber optic cable
Transmission rate	4 Mbit/s
Cycle time	4 ms 16 3 ms 12 2 ms 2...8
Maximum number of segment of SERCOS network	9
Optic fiber length	<= 38 m plastic <= 150 m glass
Length of segment	100 m bus X
Power dissipation in W	9 W
Local signalling	24 LEDs green channel diagnostic 1 LED yellow flashing module reinitializing (INI) 1 LED yellow flashing indicates data transmission and reception 1 LED red internal fault, module failure (ERR) 1 LED red external fault (I/O) 1 LED green module operating (RUN)
Current consumption	1800 mA 5 V DC
Product weight	0.52 kg

Environment

Standards	EN/IEC 61491
IP degree of protection	IP20
Ambient air temperature for operation	0...60 °C
Relative humidity	10...95 % without condensation


Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Will be Compliant on 2Q2011

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

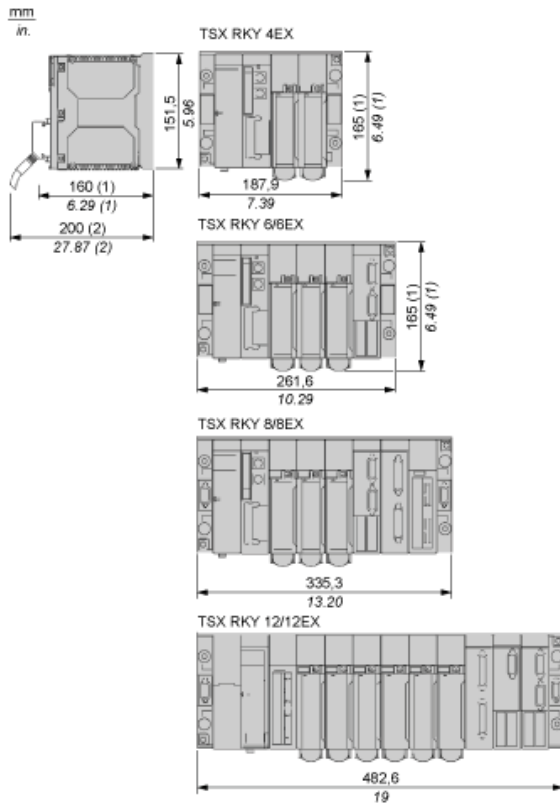

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.