



Main

Range of product	Modicon Premium Automation platform
Product or component type	Unity processor
Software designation	Unity Pro

Complementary

Number of racks	4 4/6/8 slots 2 12 slots
Number of slots	<= 32
Discrete I/O processor capacity	512 I/O
Analogue I/O processor capacity	24 I/O
Number of application specific channel	<= 8
Integrated connection type	Non isolated serial link 2 female mini DIN RS485 19.2 kbit/s Ethernet TCP/IP RJ45
Port Ethernet	10BASE-T/100BASE-TX
Communication module processor	2 1
Memory description	PCMCIA card 256 kB additional data storage Internal RAM (without PCMCIA card) 96 kB program and data Internal RAM (with PCMCIA card) 96 kB data Internal RAM (with PCMCIA card) 224 kB program
Maximum size of object areas	64 kB (DFB and EFB function blocks) unlocated internal data 64 %MWi internal words located internal data 64 %KWi constant words located internal data 4096 %Mi located internal bits 32 kB (elementary and derived data) unlocated internal data
Application structure	1 fast task 1 master task 32 event tasks
Execution time per instruction	1.75...2.6 µs floating points without PCMCIA card 1.75...2.6 µs floating points with PCMCIA card 0.5 µs word or fixed-point arithmetic with PCMCIA card 0.25 µs word or fixed-point arithmetic without PCMCIA card 0.25 µs Boolean with PCMCIA card 0.19 µs Boolean without PCMCIA card
Number of instructions per ms	4.76 Kinst/ms 100 % Boolean without PCMCIA card 3.71 Kinst/ms 65 % Boolean + 35 % fixed arithmetic without PCMCIA card 3.1 Kinst/ms 100 % Boolean with PCMCIA card 2.1 Kinst/ms 65 % Boolean + 35 % fixed arithmetic with PCMCIA card
System overhead	1 ms master task 0.3 ms fast task
Marking	CE

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Local signalling	1 LED yellow transmission activity (TX) 1 LED yellow reception activity (RX) 1 LED yellow Ethernet link diagnostics (STS) 1 LED yellow activity on TER or AUX terminal port (TER) 1 LED red processor or system fault (ERR) 1 LED red I/O module or configuration fault (I/O) 1 LED red Ethernet TCP/IP port fault (ERR) 1 LED red collision detection (COL) 1 LED green processor running (RUN) 1 LED green Ethernet TCP/IP port ready (RUN)
Current consumption	1650 mA 5 V DC
Module format	Double
Product weight	0.74 kg

Environment


Standards	73/23/EEC 89/336/EEC 92/31/EEC 93/68/EEC CSA 22-2 No 142 CSA 22-2 No 213 Class I Division 2 Group A CSA 22-2 No 213 Class I Division 2 Group B CSA 22-2 No 213 Class I Division 2 Group C CSA 22-2 No 213 Class I Division 2 Group D IEC 61131-2 UL 508
Product certifications	ABS BV DNV GL LR RINA RMRS
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	5...95 % without condensation for storage 10...95 % without condensation for operation
Operating altitude	0...2000 m
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0933 - Schneider Electric declaration of conformity download declaration of conformity

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

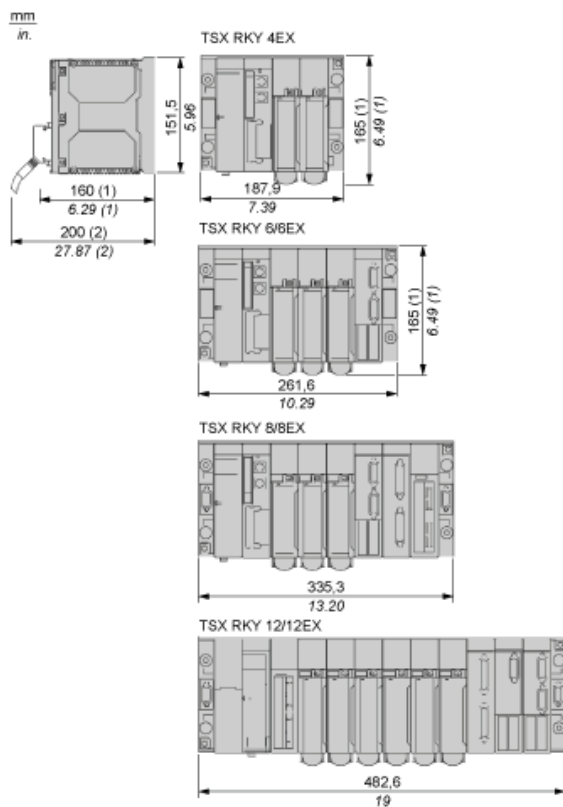

(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.