

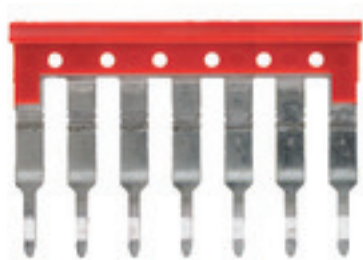
**ZQV 2.5N/7 RT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image****Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

**General ordering data**

Version	Z-series, Cross-connector, For the terminals, Number of poles: 7
Order No.	<a href="#">1717950000</a>
Type	ZQV 2.5N/7 RT
GTIN (EAN)	4008 190349431
Qty.	20 pc(s).

Creation date March 24, 2021 10:19:44 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

## ZQV 2.5N/7 RT

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	23 mm	Depth (inches)	0.906 inch
Height	34.4 mm	Height (inches)	1.354 inch
Net weight	4.55 g	Width	2.8 mm
Width (inches)	0.11 inch		

### Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

### Material data

Material	Wemid	Colour	red
UL 94 flammability rating	V-0		

### System specifications

Version	For the terminals
---------	-------------------

### Additional technical data

Explosion-tested version	Yes	Type of fixing	Plugged
--------------------------	-----	----------------	---------

### Cross-connector

Number of cross-connected terminals	7	Rated current, multi-pole	24 A
Type	Cross-connector		

### Dimensions

Pitch in mm (P)	5.1 mm
-----------------	--------

### General

Number of poles	7
-----------------	---

### Rating data

Rated current	24 A
---------------	------

### Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ECLASS 9.0	27-14-11-40	ECLASS 9.1	27-14-11-40
ECLASS 10.0	27-14-11-40	ECLASS 11.0	27-14-11-40

### Important note

Product information	Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400VThe voltage reduced to 25V if cut cross connection with blank cut edges are used
---------------------	---

### Approvals

ROHS	Conform
------	---------

Creation date March 24, 2021 10:19:44 PM CET

**ZQV 2.5N/7 RT**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data****Downloads**

---

Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
User Documentation	<a href="#">StorageConditionsTerminalBlocks</a>

---