


CC DIA 30 K MC NE WS**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

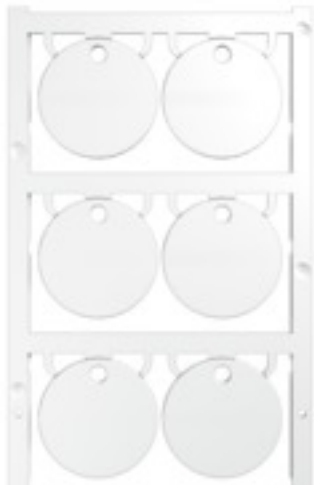

ClipCard device markers in MultiCard format are used for labelling electrical installations and switchgear systems, and offer an interesting alternative to engraving. Thanks to the proven MultiCard format, labelling is possible with PrintJet CONNECT or Plotter.

- Highly resistant printing quality when using the PrintJet as a substitute for engraving
- Universal fixing
- Carrier (screwable or with cable ties)
- Tag rail (self-adhesive or screw fixing)
- Or self-adhesive tags

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | |
|--------------------|---|
| Version | ClipCard, Device markers, {Reference (AttributeDefinition) not found: pAttr74196859207437}, Self-adhesive, Ø 30 mm, white |
| Order No. | 2047380000 |
| Type | CC DIA 30 K MC NE WS |
| GTIN (EAN) | 4050118411195 |
| Qty. | 60 pc(s). |
| compatible printer | 2715590000 2438520000 2438510000 |

Creation date March 26, 2021 9:56:39 PM CET

CC DIA 30 K MC NE WS

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|-----------------|------------|----------------|------------|
| Depth | 0.9 mm | Depth (inches) | 0.035 inch |
| Diameter | 30 mm | Height | 30 mm |
| Height (inches) | 1.181 inch | Net weight | 1.75 g |
| Width | 30 mm | Width (inches) | 1.181 inch |

Temperatures

| | |
|-----------------------------|-------------|
| Operating temperature range | -40...60 °C |
|-----------------------------|-------------|

General data

| | | | |
|-----------------------------------|------------------------------|-----------------------------------|---------------|
| Application/manufacture | Self-adhesive, Ø 30 mm | Colour | white |
| Halogen | No | Material | Polyamide 66 |
| Number of markers per combination | 1 MultiCard = Device markers | Operating temperature range | -40...60 °C |
| Operating temperature range, max. | 60 °C | Operating temperature range, min. | -40 °C |
| UL 94 flammability rating | V-2 | Version | Self-adhesive |
| Width | 30 mm | | |

Device markers

| | | | |
|----------|-------|---------|----|
| Diameter | 30 mm | Halogen | No |
|----------|-------|---------|----|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001288 | ETIM 7.0 | EC001288 |
| ECLASS 9.0 | 27-40-06-29 | ECLASS 9.1 | 27-40-06-29 |
| ECLASS 10.0 | 27-40-06-29 | ECLASS 11.0 | 27-28-11-04 |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads

| | |
|-----------------------------|--|
| Engineering Data | EPLAN |
| Product Change Notification | Technical change to MultiCard material - DE Technical change to MultiCard material - EN |

Data sheet

CC DIA 30 K MC NE WS

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

