


CR0401



Programmable controller for mobile machines

R360/BasicController 12/8

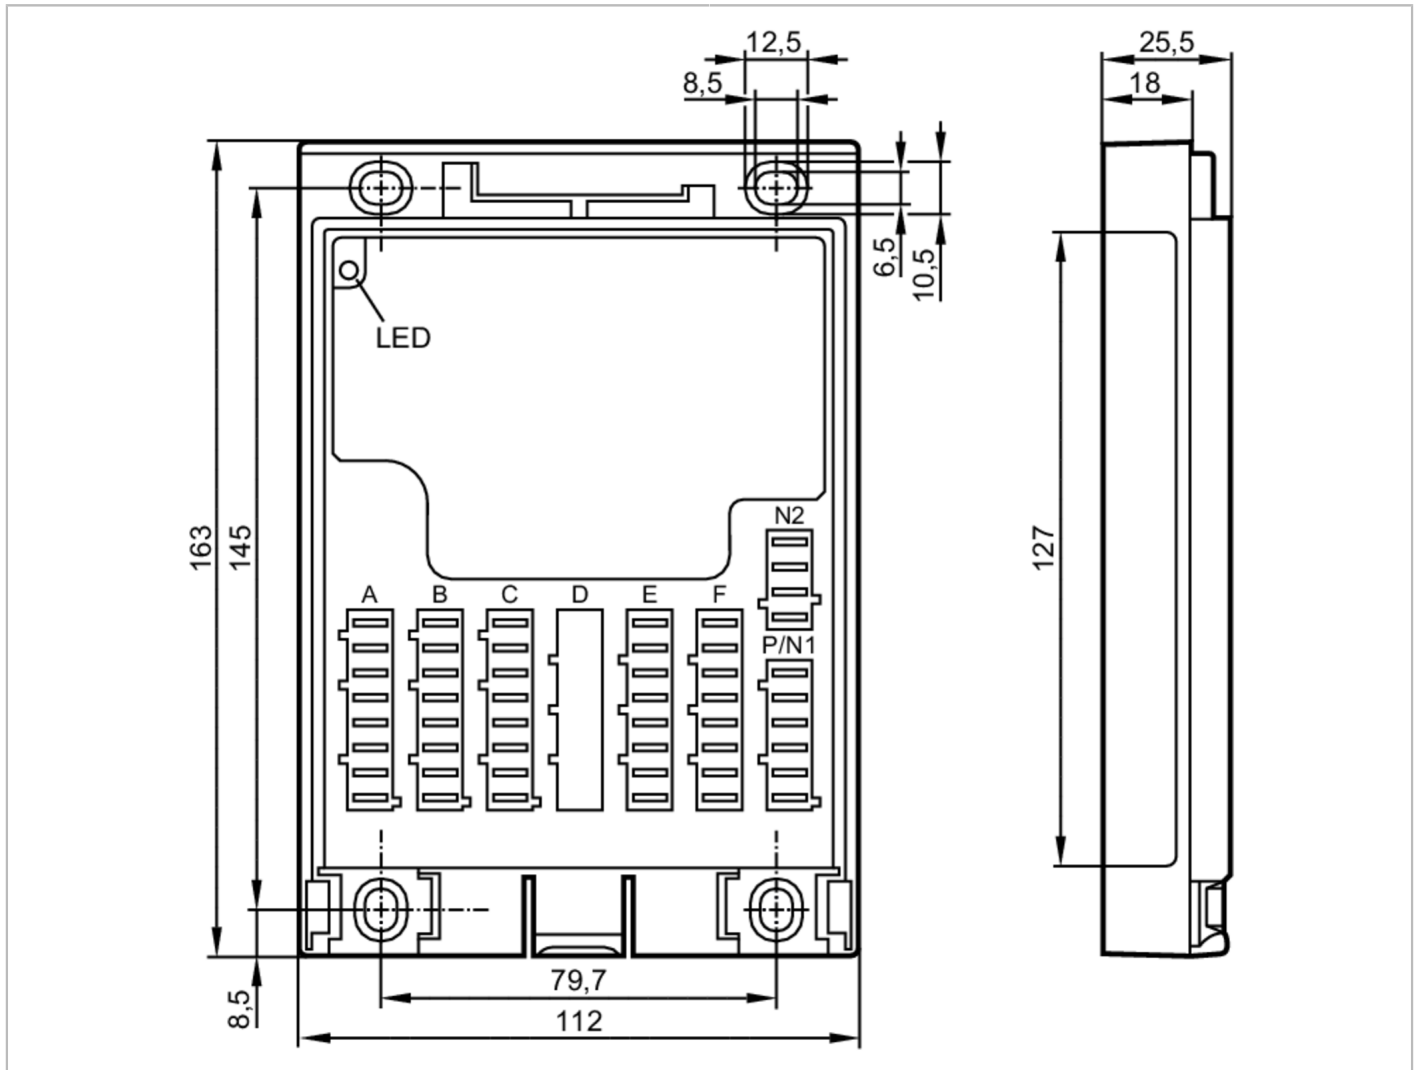

Electrical data

Operating voltage [V] 8...32 DC

Inputs / outputs

Total number of inputs and outputs	20
Number of inputs and outputs	Number of digital inputs: 12; Number of analogue inputs: 4; Number of frequency inputs: 4; Number of resistor inputs: 4; Number of digital outputs: 8

Inputs

Number of frequency inputs	4
Number of resistor inputs	4
Number of digital inputs	12
Number of analogue inputs	4
Analogue input (current) [mA]	0...20
Analogue input (voltage) [V]	0...32

Outputs

Number of digital outputs	8
---------------------------	---

CR0401



Programmable controller for mobile machines

R360/BasicController 12/8

Number of PWM outputs	8
Software / programming	
Parameter setting options	input/output functions
PLC function to IEC 61131-3	yes
Interfaces	
Number of CAN interfaces	2
Tests / approvals	
MTTF [years]	125
Mechanical data	
Weight [g]	405.5
Housing	rectangular
Type of mounting	backplane mounting
Dimensions [mm]	163 x 112 x 25.5
Remarks	
Pack quantity	1 pcs.