



SIRIUS, COMPACT STARTER,
 REVERSING STARTER 690 V,
 42 ... 70 V AC/DC, 50 ... 60 HZ,
 0.32 ... 1.25 A, IP20,
 MAIN CIRCUIT CONNECTION: PLUG-IN,
 W/O TERMINALS,
 AUXILIARY CIRCUIT CONNECTION: PLUG-IN,
 W/O TERMINALS

| General technical data: | | |
|--|----|---|
| product brand name | | SIRIUS |
| Product designation | | compact starter |
| Design of the product | | reversing feeder |
| Trip class | | CLASS 10 and 20 adjustable |
| Product function | | |
| <ul style="list-style-type: none"> control circuit interface to parallel wiring | | Yes |
| <ul style="list-style-type: none"> bus-communication | | No |
| <ul style="list-style-type: none"> short circuit protection | | Yes |
| <ul style="list-style-type: none"> control circuit interface with IO link | | No |
| Type of assignment | | continuous operation according to IEC 60947-6-2 |
| Protection class IP | | IP20 |
| Degree of pollution | | 3 |
| mounting position / recommended | | vertical, on horizontal standard mounting rail |
| Installation altitude / at a height over sea level | | |
| <ul style="list-style-type: none"> maximum | m | 2,000 |
| Ambient temperature | | |
| <ul style="list-style-type: none"> during storage | °C | -55 ... +80 |
| <ul style="list-style-type: none"> during operating | °C | -20 ... +60 |
| <ul style="list-style-type: none"> during transport | °C | -55 ... +80 |

| | | |
|---|-------------|--|
| Relative humidity • during operating phase | % | 10 ... 90 |
| Resistance against shock | | a=60 m/s ² (6g) with 10 ms per 3 shocks in all axes |
| Resistance against vibration | | f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s ² ; 10 cycles |
| Impulse voltage resistance / rated value | V | 6,000 |
| Field-bound parasitic coupling • according to IEC 61000-4-3 | | 10 V/m |
| Insulation voltage / rated value | V | 690 |
| Conductor-bound parasitic coupling conductor-earth SURGE • according to IEC 61000-4-5 | | 4 kV main contacts, 2 kV auxiliary contacts |
| Conductor-bound parasitic coupling conductor-conductor SURGE • according to IEC 61000-4-5 | | 2 kV main contacts, 1 kV auxiliary contacts |
| Conductor-bound parasitic coupling BURST • according to IEC 61000-4-4 | | 4 kV main contacts, 2 kV auxiliary contacts |
| Maximum permissible voltage for safe disconnection • between main circuit and auxiliary circuit • between control and auxiliary circuit • between auxiliary circuit and auxiliary circuit | V V V | 400 300 250 |
| Reference code • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2 | | Q Q |

Main circuit:

| | | |
|--|----------------|-----------------------|
| Operating voltage / at AC-3 / rated value • maximum | V | 690 |
| Number of poles / for main current circuit | | 3 |
| Adjustable response current • of the current-dependent overload release | A | 0.32 ... 1.25 |
| Formula for making capacity limit current | | 38.4 x I _e |
| Formula for interruption capacity limit current | | 32 x I _e |
| Emitted mechanical power / for 4-pole three-phase motor • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value | kW kW kW | 0.37 0.55 0.75 |
| Service power / at AC-3 / at 400 V / rated value | W | 370 |
| Frequency of operation / at AC-41 / according to IEC 60947-6-2 / maximum | 1/h | 750 |
| Frequency of operation / at AC-43 / according to IEC 60947-6-2 / maximum | 1/h | 250 |

| | | |
|--|-----|------------|
| Off-load operating frequency | 1/h | 3,600 |
| Mechanical operating cycles as operating time | | |
| • of the main contacts / typical | | 10,000,000 |
| • of the auxiliary contacts / typical | | 10,000,000 |
| • of the signal contacts / typical | | 10,000,000 |

Control circuit:

| | | |
|-----------------------------------|----|-----|
| Type of voltage | | AC |
| Control supply voltage / 1 | | |
| • for DC | | |
| • initial rated value | V | 42 |
| • final rated value | V | 70 |
| • at 50 Hz / for AC | | |
| • initial rated value | V | 42 |
| • final rated value | V | 70 |
| • at 60 Hz / for AC | | |
| • initial rated value | V | 42 |
| • final rated value | V | 70 |
| Holding power | | |
| • for AC / maximum | W | 3.2 |
| • for DC / maximum | W | 4.2 |
| Switch-off delay time | ms | 50 |
| Start-up delay time | ms | 70 |

Auxiliary circuit:

| | | |
|--|---|---------|
| Product extension | | |
| • auxiliary switch | | Yes |
| Number of NC contacts | | |
| • for auxiliary contacts | | 0 |
| Number of NO contacts | | |
| • for auxiliary contacts | | 2 |
| • of the non-delayed short-circuit release / for alarm contact | | 1 |
| Number of changeover contacts / of the current-dependent overload release / for alarm contact | | 1 |
| Operating current / of the auxiliary contacts / at AC-12 | | |
| • maximum | A | 10 |
| Electrical switching cycle as operating time / of the auxiliary contacts | | |
| • at AC-15 / at 6 A / at 230 V / typical | | 500,000 |
| • at DC-13 / at 6 A / at 24 V / typical | | 100,000 |

| | | |
|--|--|---------|
| Electrical switching cycle as operating time / of the signal contacts | | |
| <ul style="list-style-type: none"> • at AC-15 / at 6 A / at 230 V / typical | | 500,000 |
| <ul style="list-style-type: none"> • at DC-13 / at 6 A / at 24 V / typical | | 100,000 |

Short-circuit:

| | | |
|---|--|------------------|
| Design of the fuse link / for short-circuit protection of the auxiliary switch | | |
| <ul style="list-style-type: none"> • required | | fuse gL/gG: 10 A |

Installation/mounting/dimensions:

| | | |
|--------------------------|----|----------------------------|
| Mounting type | | screw and snap-on mounting |
| Width | mm | 90 |
| Height | mm | 170 |
| Depth | mm | 165 |
| mounting position | | any |

Connections:

| | | |
|--|--|---------------------------|
| Product function | | |
| <ul style="list-style-type: none"> • removable terminal for main circuit | | Yes |
| <ul style="list-style-type: none"> • removable terminal for auxiliary and control circuit | | Yes |
| Design of the electrical connection | | |
| <ul style="list-style-type: none"> • for main current circuit | | plug-in without terminals |
| <ul style="list-style-type: none"> • for auxiliary and control current circuit | | plug-in without terminals |

Certificates/approvals:

| | | |
|------------------------------------|--|--------------------|
| Verification of suitability | | IEC / EN 60947-6-2 |
|------------------------------------|--|--------------------|

General Product Approval

EMC

Functional Safety /
Safety of
Machinery



CCC



CSA



UL



C-TICK



VDE

Test Certificates

[Type Test
Certificates/Test
Report](#)

Shipping Approval



LRS



PRS



RINA



RMRS

other

[Declaration of
Conformity](#)

[other](#)

[Environmental
Confirmations](#)

UL/CSA ratings:

yielded mechanical performance (hp) / for three-phase squirrel
cage motors

- at 460/480 V / rated value
- at 575/600 V / rated value

hp

0.5

hp

0.5

Full-load current (FLA) / for 3-phase motor

- at 480 V / rated value
- at 600 V / rated value

A

1.25

A

1.25

Contact rating designation / for auxiliary contacts / according to
UL

contacts 21-22, 13-14, 43-44 Q600 / A600, contacts
77-78 R300 / B300, contacts 95-96-98 R300 / D300

Reliability figures:

B10 value

3,000,000

Proportion of dangerous failures

%

50

Proportion of dangerous failures / with low demand rate /
according to SN 31920

%

40

Protection against electrical shock

finger-safe

Failure rate [FIT] / with low demand rate / according to SN 31920

FIT

100

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)




<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:

<http://www.siemens.com/cax>

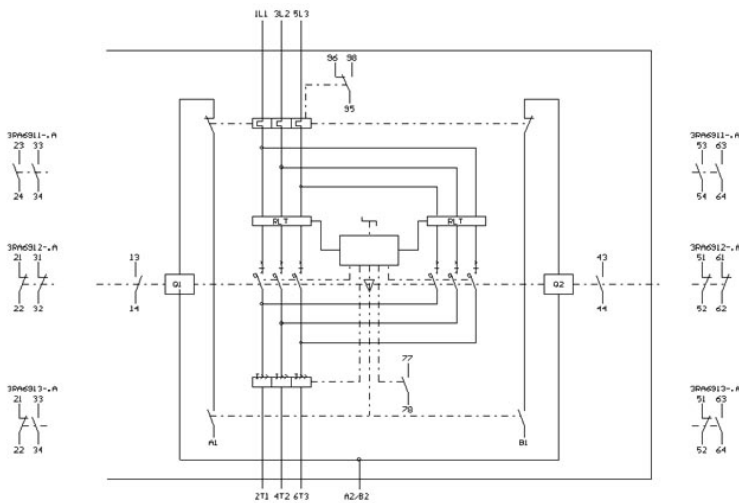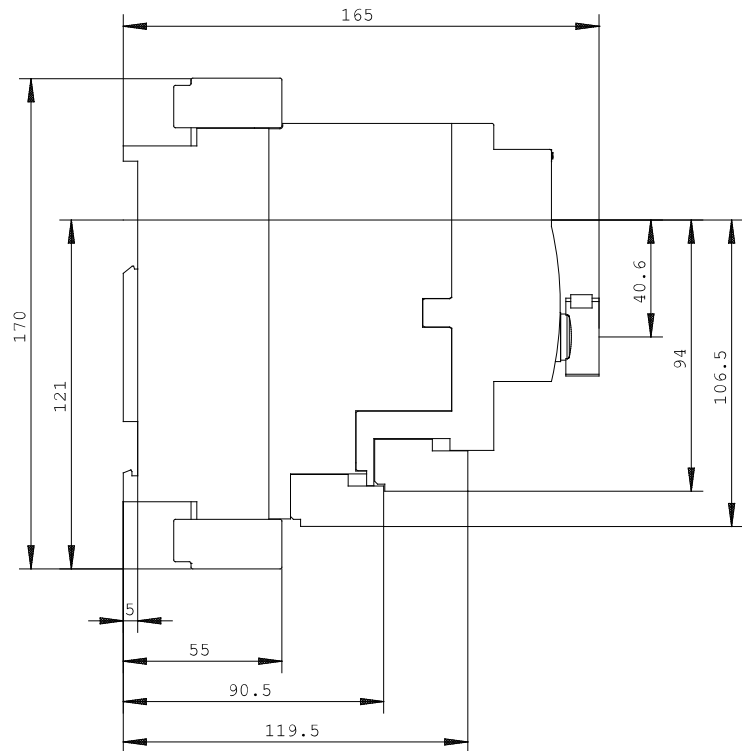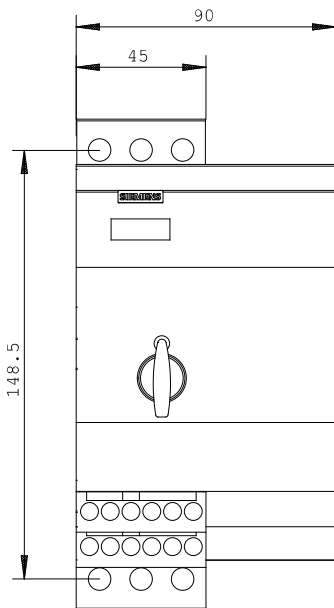

last change:

Jun 16, 2014