



CURRENT RELAY,N-TYPE AC 230V 1/5/10/15A 1PHASE, BELOW

Similar to image

Technical data:

Design of the electrical connection		screw-type terminals
Product function / current window recognition DC		No
Product function		
• overcurrent recognition of 1 phase		No
• undercurrent recognition of 3 phases		No
• undercurrent recognition of 1 phase		Yes
• overcurrent recognition DC		No
• undercurrent recognition DC		No
• overcurrent recognition of 3 phases		No
• tension window recognition of 1 phase		No
• tension window recognition of 3 phases		No
Adjustable operating delay time		
• final value	s	20
• initial value	s	0.1
Adjustable backslide delay time		
• initial value	s	0.1
• final value	s	20
Design of the electrical connection / jumper socket		No

Type of voltage / for operating		AC
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of change-over switches / for auxiliary contacts		2
Measurable current / for AC / final value	A	15
Measurable current / for AC / initial value	A	15
Control supply voltage		
• at 50 Hz / at AC / rated value		
• minimum	V	230
• maximum	V	230
• at 60 Hz / at AC / rated value		
• minimum	V	230
• maximum	V	230
Depth	mm	64
Height	mm	90
Width	mm	36

Certificates/approvals:

General Product Approval



GOST

Declaration of Conformity



EG-Konf.

other

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT6113/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT6113

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)



I2Y1_00486

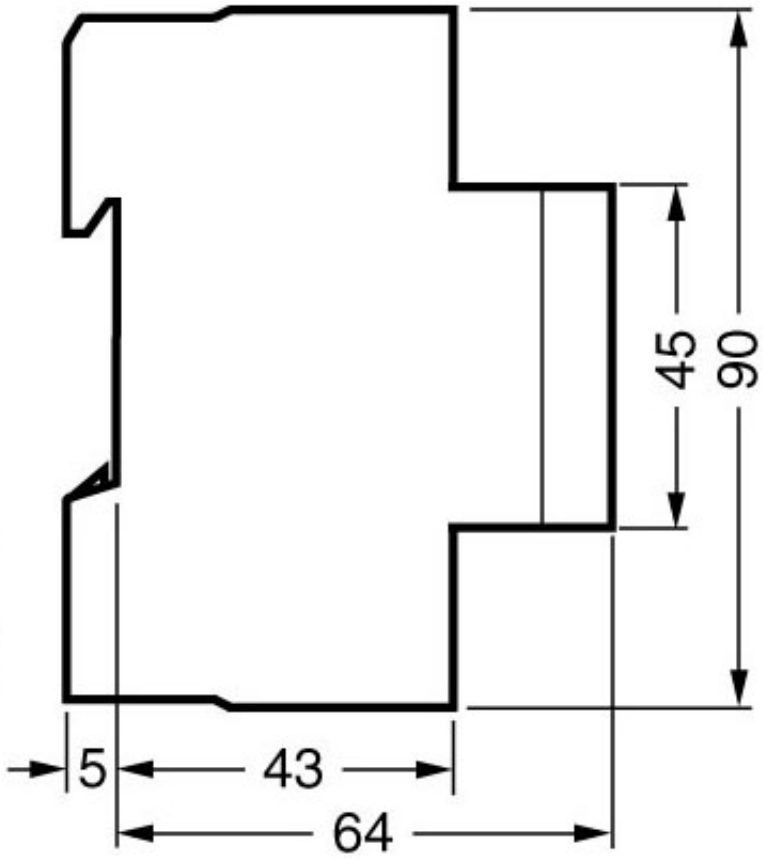

last change:

Feb 18, 2013