



MTS 1-PHASE SAFETY TRANSFORMER

P: 63VA IN: 230/400VAC +/- 15VAC OUT: 24VAC

Single-phase safety transformer
63 VA
Spring clamp terminals
Isolation class T 40/B
Other voltages on request.

[Link to Product](#)

Illustration

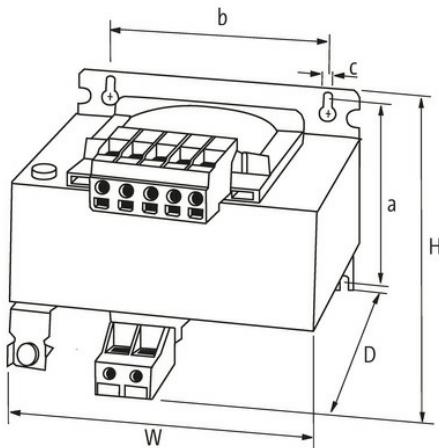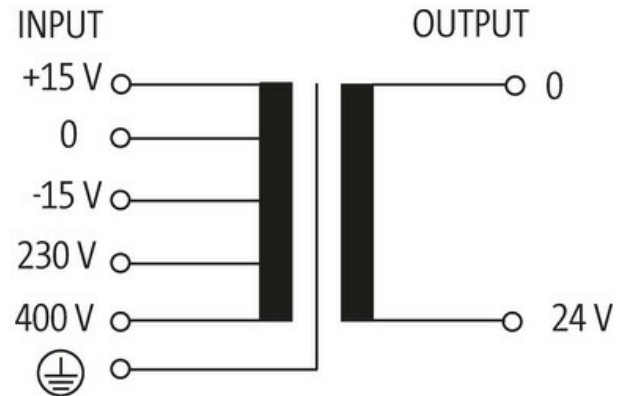

Product may differ from Image



General data

| | |
|------------------------|--|
| Standards | EN 61558-1, EN 61558-2-6, EN 62041 category 0 |
| Mounting method | Long-hole mounting or DIN-rail mountable TH35 (EN 60715) |
| Temperature range | -20...+40 °C (storage temperature -40...+80 °C) |
| Test isolation voltage | 4 kV (prim./sec.) |
| Drill hole Ø | 4.8x8.4 mm |

| | |
|----------------------|--------------|
| Fixing centers a×b×c | 56×56×4.8 mm |
|----------------------|--------------|

| | |
|------------------|-------------|
| Dimensions H×W×D | 79×78×93 mm |
|------------------|-------------|

Output

| | |
|----------------|----------------|
| Output voltage | 24 V AC (SELV) |
|----------------|----------------|

| | |
|---------------|-------|
| Output rating | 63 VA |
|---------------|-------|

Input

| | |
|---------------|------------------|
| Input voltage | 230/400 ±15 V AC |
|---------------|------------------|

| | |
|----------------|-----------------------------------|
| Inrush current | 2 A (230 V AC); 1.15 A (400 V AC) |
|----------------|-----------------------------------|

| | |
|-----------------------|-------------------------------------|
| Short-circuit current | 2.95 A (230 V AC); 1.7 A (400 V AC) |
|-----------------------|-------------------------------------|

| | |
|---------------|-------------------------------------|
| Input current | 0.33 A (230 V AC); 0.2 A (400 V AC) |
|---------------|-------------------------------------|

| | |
|-----------|------------|
| Frequency | 50...60 Hz |
|-----------|------------|

Commercial data

| | |
|-------------------|----|
| country of origin | CZ |
|-------------------|----|

| | |
|-----------------------|----------|
| customs tariff number | 85043180 |
|-----------------------|----------|

| | |
|-----|---------------|
| EAN | 4048879066013 |
|-----|---------------|

| | |
|--------|----------|
| eClass | 27031302 |
|--------|----------|

| | |
|----------------|-------|
| Packaging unit | 1.000 |
|----------------|-------|