

MOTOR STARTER ECOFAST SRSSTE PROFIBUS DP
ELECTR. SWITCHING ELECTR./THERM. UE
PROTECTION 3-PH 400 V/5.5 KW 2.40 A...12.00 A
WITHOUT BRAKE CONTACT 4DI 24 V DC HAN Q4/2 -
HAN 1NC

General details:		
Design of the product		reversing starter
Product function / bus-communication		Yes
Protocol / is supported / PROFIBUS DP protocol		Yes
Protocol / is supported / AS interface protocol		No
Product component / outlet for enine brake		No
Type of assignement		1
Reference code / according to DIN EN 61346-2		Q
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		A
Width	mm	130
Height	mm	250
Depth	mm	125

Control circuit:		
Type of voltage		DC
Control supply voltage		
• for DC / rated value / minimum	V	20.4
• for DC / rated value / maximum	V	28.8






Main circuit:		
Type of the motor protection		full motor protection
Design of the switching contact		solid-state
Design of the short-circuit protection		fuse
Operating voltage / rated value		
• minimum	V	400
• maximum	V	500
Service power		
• at AC-3 / at 400 V / rated value	W	5,500
• for three-phase servomotors / at 400 V / at 50 Hz / minimum	kW	0.9
• for three-phase servomotors / at 400 V / at 50 Hz / maximum	kW	5.5


Adjustable response current / of the current-dependent overload release		
• initial value	A	2.4
• final value	A	12
Breaking capacity limit short-circuit current (Icu) / at 400 V / rated value	kA	100

Connection type:		
Design of the electrical connection / for main current circuit		tab terminals

Ambient conditions:		
Protection class IP		IP65
Ambient temperature		
• during operating	°C	-20 ... +40



Certificates/approvals:

General Product Approval	Declaration of Conformity	Test Certificates
 CSA  EAC  GOST  UL  EG-Konf.		Type Test Certificates/Test Report

other
 PROFIT  Profibus Environmental Confirmations

Further information:

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/industrial-controls/catalogs>
- Industry Mall (Online ordering system)**
<http://www.siemens.com/industrial-controls/mall>
- CAX-Online-Generator**
<http://www.siemens.com/cax>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<http://support.automation.siemens.com/WW/view/en/3RK1303-6DS74-3AA0/all>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1303-6DS74-3AA0

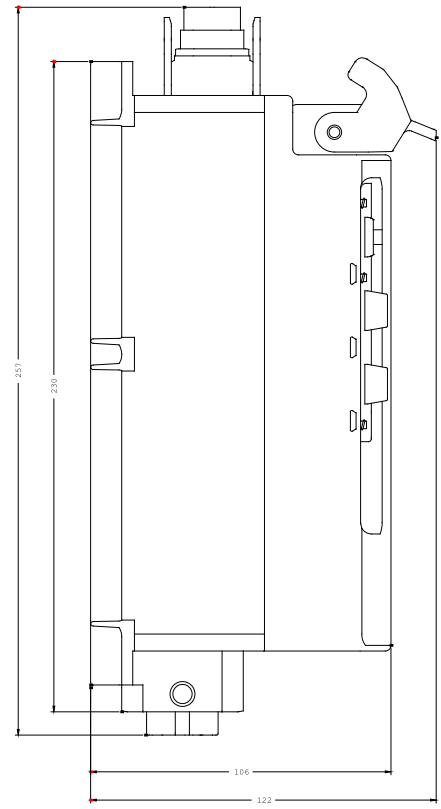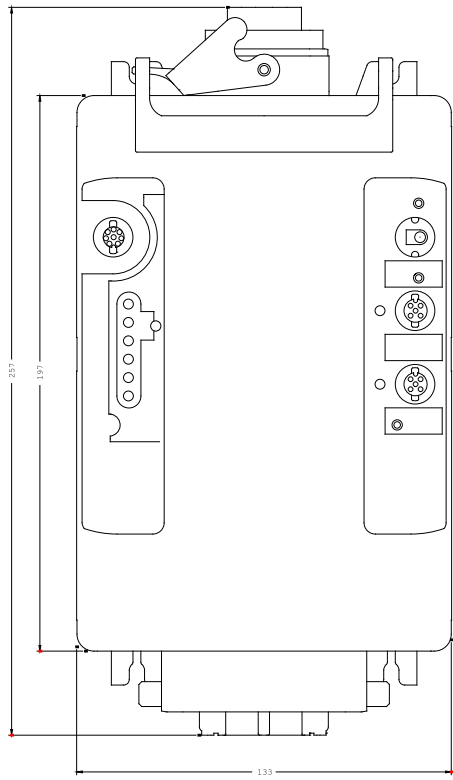

last change:

Jul 21, 2014