

TREE M-4TX Lite managed Switch 4 Ports


4x10/100BT IP20 plastic

4 port managed switch

Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration

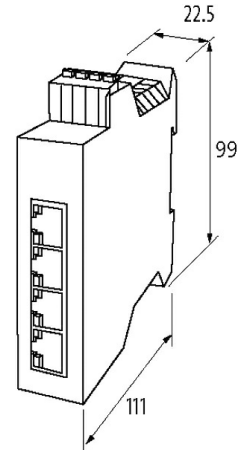

Product may differ from Image

Technical Data

Operating voltage	9.5...31.5 V
Transfer rate	10/100 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

General data

Mounting method	DIN-rail mountable (EN 50022)
Temperature range	0...+60 °C (storage temperature -40...+85 °C)
Housing	Black plastic
Protection	IP20
Dimensions HxWxD	111x22.5x99 mm

Connections

Fieldbus	4x RJ45
Supply	Spring clamp plug-in terminal: 0.2...2.5 mm ²

Switch Management

Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI)
Port Mirroring	DHCP, SNMP (v1, v2c, v3), RSTP, STP
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	Lite - Managed Switch

Diagnostic

Communication status	via LED, LLDP
Monitoring - no voltage	yes

Commercial data

country of origin	DE
-------------------	----

customs tariff number 85176200

EAN 4048879689335

eClass 19170106

Packaging unit 1.000