

**Y-Distributor M8 male / M8 female 0° A-cod.**

PVC 3x0.25 gy UL/CSA 2m

Y-connector M8 – M8, 4/3-pole

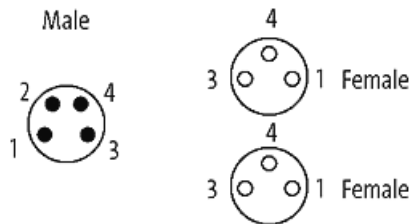
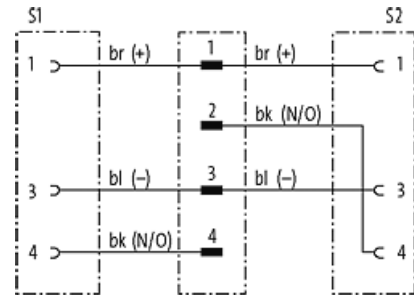
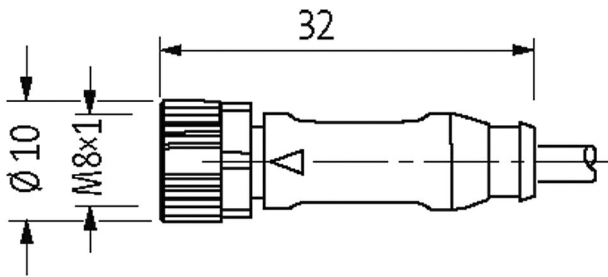
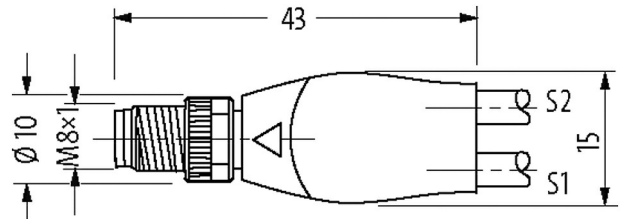
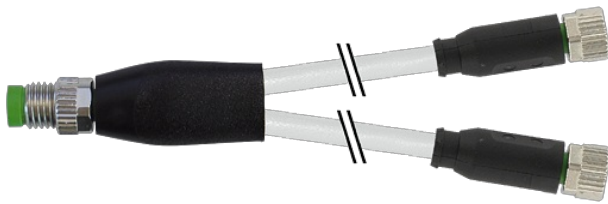
Male straight – females straight

Art-No. 7005 - M8 Lite - (plastic hexagonal screw) on request

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

**Link to Product****Illustration**

Product may differ from Image

**Form**

Form 87001

**Technical Data**

|   |   |
|---|---|
| Operating voltage                         | max. 50 V AC/60 V DC  |
| Rated surge voltage                       | 1.5 kV  |
| Operating current per contact             | max. 4 A  |
| Material group                            | IEC 60664-1, category I   |
| Locking of ports                          | Screw thread (M8x1 mm) recommended torque 0.4 Nm, self-securing     |
| Compression gland                         | M8 (SW9)  |
| Protection                                | IP65, IP66K, IP67 inserted and tightened (EN 60529)                 |
| Locking material                          | Brass, nickel-plated (screw), Zinc die casting, nickel-plated (nut) |
| Material                                  | PUR   |
| suitable for corrugated tube (internal Ø) | 6.5 mm  |

| General data                       |  |
|------------------------------------|--|
| Standards                          | DIN EN 61076-2-104 (M8)                        |
| Mounting method                    | inserted, tightened                            |
| Material (contact)                 | Copper alloy                                   |
| Material (contact surface)         | Au   |
| Material (gasket)                  | FKM  |
| Pollution Degree                   | 3  |
| Temperature range                  | -25...+85 °C, depending on cable quality       |
| Cables                             |  |
| Cable identification               | 210  |
| Cable Type                         | 1 (PVC)  |
| Approval (cable)                   | UL (AWM-Style 2464/1731), CSA                  |
| Cable weight [g/m]                 | 29,37  |
| Material (wire)                    | Cu wire, bare                                  |
| Resistor (core)                    | max. 79 Ω/km (20 °C)                           |
| Single wire Ø (core)               | 0.15 mm  |
| Construction (core)                | 14× 0.15 mm (multi-strand wire class 5)        |
| Diameter (core)                    | 3× 0.25 mm <sup>2</sup>                        |
| AWG                                | similar to AWG 24                              |
| Material (wire isolation)          | PVC  |
| Material property (wire isolation) | CFC-, cadmium-, silicone- and lead-free        |
| Shore hardness (wire isolation)    | 45 ±5 D  |
| Wire-Ø incl. isolation             | 1.25 mm ±5%                                    |
| Color/numbering of wires           | br, bk, bl                                     |
| Stranding combination              | 3 wires twisted                                |
| Shield                             | no   |
| Material (jacket)                  | PVC  |
| Material property (jacket)         | CFC-, cadmium-, silicone- and lead-free        |
| Shore hardness (jacket)            | 85 ±5 A  |
| Outer-Ø (jacket)                   | 4.5 mm ±5%                                     |
| Color (jacket)                     | gray   |
| chemical resistance                | good resistance to oil, gasoline and chemicals |
| thermal resistance                 | flame retardant UL 1581 VW1 / CSA FT1          |
| Nominal voltage                    | UL 300 V AC                                    |
| Test voltage                       | 2000 V AC                                      |
| Current load capacity              | to DIN VDE 0298-4                              |
| Temperature range (fixed)          | -30...+80 °C                                   |
| Temperature range (mobile)         | -5...+80 °C                                    |
| Bend radius (fixed)                | 5× outer Ø                                     |
| Bend radius (moving)               | 10× outer Ø                                    |
| No./diameter of wires              | 3× 0.25 mm <sup>2</sup>                        |
| Wire isolation                     | PVC (br, bl, bk)                               |
| Jacket Color                       | gray   |
| Material (jacket)                  | PVC (UL/CSA)                                   |
| Outer Ø                            | 4.5 mm ±5%                                     |
| Bend radius (moving)               | 10× outer Ø                                    |
| Temperature range (fixed)          | -30...+80 °C                                   |
| Temperature range (mobile)         | -5...+80 °C                                    |
| Commercial data                    |  |
| country of origin                  | DE   |
| customs tariff number              | 85444290                                       |
| EAN                                | 4048879627900                                  |
| eClass                             | 27279218                                       |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Packaging unit

1