

**M8 female 0° A-cod. with cable shielded**

PVC 4x0.34 shielded bk UL/CSA 3m

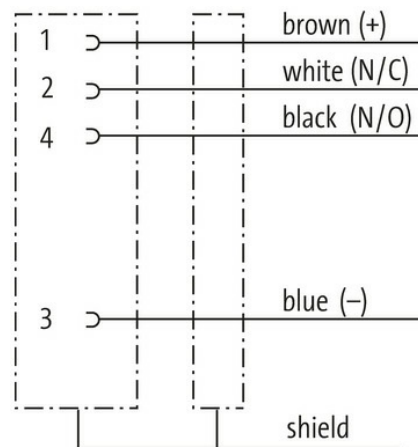
Female straight

M8, 4-pole  
shielded

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**[Link to Product](#)****Illustration****Female**

Product may differ from Image



\* only for products with UL/CSA approved cable

**Form**

Form

08761

**Technical Data**

Operating voltage

max. 50 V AC/60 V DC

|                               |   |
|-------------------------------|---|
| Rated surge voltage           | 0.8 kV  |
| Operating current per contact | max. 4 A  |
| Material group                | IEC 60664-1, category I   |
| Locking of ports              | Screw thread (M8×1 mm) recommended torque 0.4 Nm, self-securing |
| Compression gland             | M8 (SW9)  |
| Protection                    | IP65, IP66K, IP67 inserted and tightened (EN 60529)             |
| Material                      | PUR   |
| Locking material              | Zinc die casting, nickel-plated                                 |

**General data**

|                   |  |
|-------------------|--|
| Standards         | DIN EN 61076-2-104 (M8)                  |
| Pollution Degree  | 3  |
| Temperature range | -25...+85 °C, depending on cable quality |

**Cables**

|                                    |  |
|------------------------------------|--|
| No./diameter of wires              | 4× 0.34 mm <sup>2</sup>  |
| Wire isolation                     | PVC (br, wh, bl, bk)   |
| Outer Ø                            | 5.3 mm ±5%   |
| Cable identification               | 601  |
| Cable Type                         | 1 (PVC)  |
| Approval (cable)                   | UL (AWM-Style 2464/1731), CSA  |
| Cable weight [g/m]                 | 58,3 g   |
| Material (wire)                    | Cu wire, bare  |
| Resistor (core)                    | max. 57 Ω/km (20 °C)   |
| Single wire Ø (core)               | 0.15 mm  |
| Construction (core)                | 19× 0.15 mm (multi-strand wire class 5)  |
| Diameter (core)                    | 4× 0.34 mm <sup>2</sup>  |
| AWG                                | similar to AWG 22  |
| Material (wire isolation)          | PVC  |
| Material property (wire isolation) | CFC-, cadmium-, silicone- and lead-free, matt, low-adhesion, machine easy to process, abrasion-resistant |
| Shore hardness (wire isolation)    | 45 ±5 D  |
| Wire-Ø incl. isolation             | 1.25 mm ±5%  |
| Color/numbering of wires           | br, bk, bl, wh   |
| Stranding combination              | 4 wires twisted  |
| Shield                             | yes  |
| optical shield cover               | min. 80%   |
| Material (jacket)                  | PVC  |
| Material property (jacket)         | CFC-, cadmium-, silicone- and lead-free, matt, low-adhesion, machine easy to process, abrasion-resistant |
| Shore hardness (jacket)            | 85 ±5 A  |
| Outer-Ø (jacket)                   | 5.3 mm ±5%   |
| Color (jacket)                     | black  |
| Jacket Color                       | black  |
| chemical resistance                | good resistance to oil, gasoline and chemicals   |
| thermal resistance                 | flame retardant UL 1581 VW1 / CSA FT1  |
| Nominal voltage                    | 300 V AC   |
| Test voltage                       | 2000 V AC  |
| Current load capacity              | to DIN VDE 0298-4  |
| Temperature range (fixed)          | -30...+80 °C   |
| Temperature range (fixed)          | -30...+80 °C   |
| Temperature range (mobile)         | -5...+80 °C  |
| Temperature range (mobile)         | -5...+80 °C  |
| Bend radius (fixed)                | 10× outer Ø  |
| Material (jacket)                  | PVC (UL/CSA)   |

**Commercial data**

|                   |    |
|-------------------|----|
| country of origin | DE |
|-------------------|----|

|                       |               |
|-----------------------|---------------|
| customs tariff number | 85444290      |
| EAN                   | 4048879517669 |
| eClass                | 27279218      |
| Packaging unit        | 1.000         |