

TREE PROFINET managed Switch 4x10/100BT IP20 plastic RJ45


4 ports

PROFINET - Managed Switch

Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)

Illustration

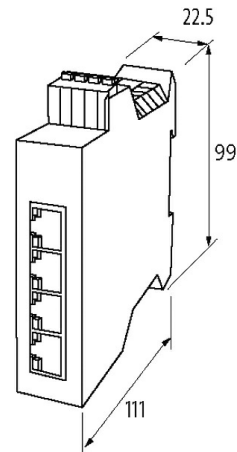

Product may differ from Image



Technical Data

| | |
|-------------------|------------------------------|
| Operating voltage | 9.5...31.5 V |
| Transfer rate | 10/100 Mbit/s full duplex |
| Operating modes | Autocrossing Autonegotiation |

General data

| | |
|-------------------|---|
| Mounting method | DIN-rail mountable (EN 50022) |
| Temperature range | 0...+60 °C (storage temperature -40...+85 °C) |
| Housing | Black plastic |
| Protection | IP20 |
| Dimensions H×W×D | 111×22.5×99 mm |

Connections

| | |
|----------|--|
| Fieldbus | 4× RJ45 |
| Supply | Spring clamp plug-in terminal: 0.2...2.5 mm ² |

PROFINET

| | |
|------------------------|---------------------------|
| Specification | V2.3, Conformance Class B |
| Addressing | DCP |
| FSU (Fast-Start-Up) | no |
| PROFINET Netload Class | I |
| MRP | yes |
| Shared Device | no |

Switch Management

| | |
|----------------|---|
| Protocols | DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) |
| Port Mirroring | yes |

| | |
|-----------------------|---------------------------|
| VLAN (QoS) IEEE 802.p | yes |
| Alarm contact | no |
| Remote maintenance | Open VPN |
| Webserver | HTTP, HTTPS |
| Switch Form | PROFINET - Managed Switch |

Diagnostic

| | |
|-------------------------|---------------|
| Communication status | via LED, LLDP |
| Monitoring - no voltage | yes |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | DE |
| customs tariff number | 85176200 |
| EAN | 4048879720328 |
| eClass | 19170106 |
| Packaging unit | 1.000 |