


## Modlight Illumix Slim Line C32W

LED machine lamp, IP54, 24VDC, 2xM8 connection

Modlight Illumix Slim Line C  
32 W  
expandability

### Link to Product

#### Illustration

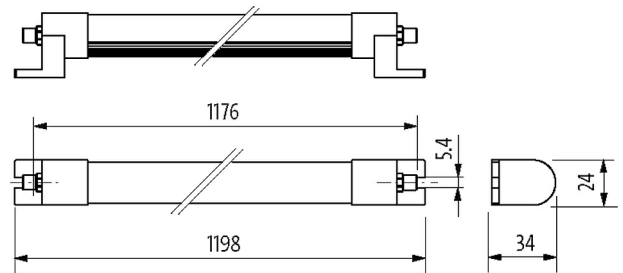

Product may differ from Image



#### Technical Data

|                         |                                |
|-------------------------|--------------------------------|
| Operating voltage       | 24 V DC (21.6...27.6 V DC)     |
| No. of poles            | 4-pole                         |
| Coding                  | A-coded                        |
| Connection              | M8 (male)                      |
| Luminaire light yield   | approx. 105 lm/W               |
| Luminaire light current | approx. 3360 lm                |
| Color reproduction (Ra) | > 80                           |
| Light color             | Daylight white, approx. 5500 K |
| Lighting angle          | > 120°                         |
| Input current           | 32 W                           |

#### General data

|                        |                                    |
|------------------------|------------------------------------|
| Mounting method        | rotatable                          |
| Temperature range      | -30...+50 °C                       |
| Material (housing)     | Anodized aluminum                  |
| Material (light cover) | Diffuse polystyrene (PS)           |
| Installation altitude  | Operation up to 2 000 m            |
| Vibration stress       | 2...9 Hz/10 mm; 9...200 Hz/3 g     |
| Screw head-Ø           | max. 12 mm/M5                      |
| Relative humidity      | 5...95%                            |
| Protection             | IP54                               |
| Dimensions H×W×D       | 34×1198×24 mm (1.34×47.17×0.94 in) |
| Shock load             | 50 g, 11 ms                        |

#### Commercial data

|                       |          |
|-----------------------|----------|
| country of origin     | DE       |
| customs tariff number | 94054239 |

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

|                |               |
|----------------|---------------|
| EAN            | 4048879752411 |
| eClass         | 27110306      |
| Packaging unit | 1.000         |