

**M8 male 0° snap-in/ M12 female 90° A-cod. screw-in**

PVC 3x0.25 gy UL/CSA 1.5m

Male straight – female 90°


M8 (Snap In) – M12, 3-pole

Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

Further cable lengths on request.



Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

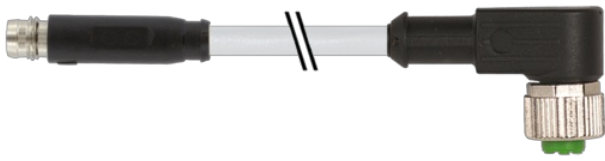**[Link to Product](#)****Illustration**

Male

Female

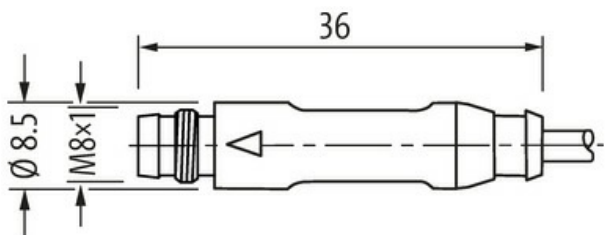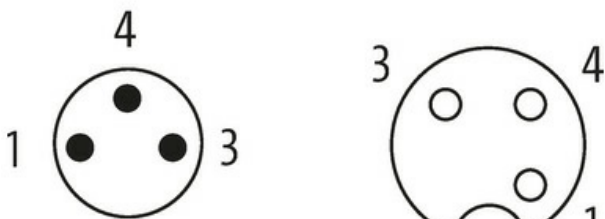

Product may differ from Image



\* only for products with UL/CSA approved cable

| Form                                      |  |
|---|--|
| Form                                      | 88381  |
| Technical Data                            |  |
| Operating voltage                         | 50 V AC/60 V DC  |
| Operating voltage (only UL listed)        | 30 V AC/DC   |
| Rated surge voltage                       | 1.5 kV   |
| Operating current per contact             | max. 4 A   |
| Material group                            | IEC 60664-1, category I  |
| Coding                                    | M12, A-coded   |
| Locking of ports                          | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing, M8 (Snap In) |
| Compression gland                         | M12 (SW13)   |
| Protection                                | IP65, IP66K, IP67 (M12) - IP65 (M8)  |
| Material                                  | PUR  |
| Locking material                          | Zinc die casting, matte nickel plated (M12)                                    |
| suitable for corrugated tube (internal Ø) | M12 (10 mm); M8 (6.5 mm)   |
| General data                              |  |
| Standards                                 | DIN EN 61076-2-101 (M12), DIN EN 61076-2-104 (M8)                              |
| Pollution Degree                          | 3  |
| Temperature range                         | -25...+85 °C, depending on cable quality                                       |
| Cables                                    |  |
| No./diameter of wires                     | 3 × 0.25 mm <sup>2</sup>   |
| Wire isolation                            | PVC (br, bl, bk)   |
| Outer Ø                                   | 4.5 mm ±5%   |
| Cable identification                      | 210  |
| Cable Type                                | 1 (PVC)  |
| Approval (cable)                          | UL (AWM-Style 2464/1731), CSA  |
| Cable weight [g/m]                        | 29,37 g  |
| Material (wire)                           | Cu wire, bare  |
| Resistor (core)                           | max. 79 Ω/km (20 °C)   |
| Single wire Ø (core)                      | 0.15 mm  |
| Construction (core)                       | 14 × 0.15 mm (multi-strand wire class 5)                                       |
| Diameter (core)                           | 3 × 0.25 mm <sup>2</sup>   |
| AWG                                       | similar to AWG 24  |
| Material (wire isolation)                 | PVC  |
| Material property (wire isolation)        | CFC-, cadmium-, silicone- and lead-free  |
| Shore hardness (wire isolation)           | 45 ±5 D  |
| Wire-Ø incl. isolation                    | 1.25 mm ±5%  |
| Color/numbering of wires                  | br, bk, bl   |
| Stranding combination                     | 3 wires twisted  |
| Shield                                    | no   |
| Material (jacket)                         | PVC  |
| Material property (jacket)                | CFC-, cadmium-, silicone- and lead-free  |
| Shore hardness (jacket)                   | 85 ±5 A  |
| Outer-Ø (jacket)                          | 4.5 mm ±5%   |
| Color (jacket)                            | gray   |
| Jacket Color                              | gray   |
| Cable print                               | -  |
| chemical resistance                       | good resistance to oil, gasoline and chemicals                                 |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

|                            |                                       |
|----------------------------|---------------------------------------|
| thermal resistance         | flame retardant UL 1581 VW1 / CSA FT1 |
| Nominal voltage            | UL 300 V AC                           |
| Test voltage               | 2000 V AC                             |
| Current load capacity      | to DIN VDE 0298-4                     |
| Temperature range (fixed)  | -30...+80 °C                          |
| Temperature range (fixed)  | -30...+80 °C                          |
| Temperature range (mobile) | -5...+80 °C                           |
| Temperature range (mobile) | -5...+80 °C                           |
| Bend radius (fixed)        | 5× outer Ø                            |
| Bend radius (moving)       | 10× outer Ø                           |
| Bend radius (moving)       | 10× outer Ø                           |
| Material (jacket)          | PVC (UL/CSA)                          |

**Commercial data**

|                       |          |
|-----------------------|----------|
| country of origin     | DE       |
| customs tariff number | 85444290 |
| Packaging unit        | 1.000    |