

**Mini (7/8) 5 pole, Female 0° w/ Cable**

PVC 5x16AWG ye UL/CSA, STOOW

Female straight

7/8" (5-pole)

Power cable

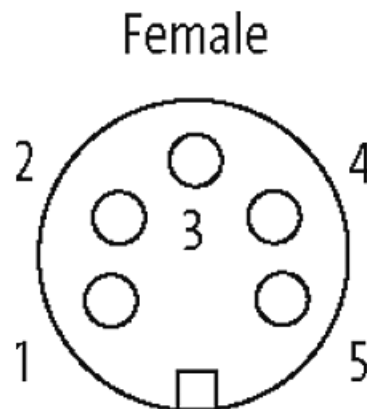
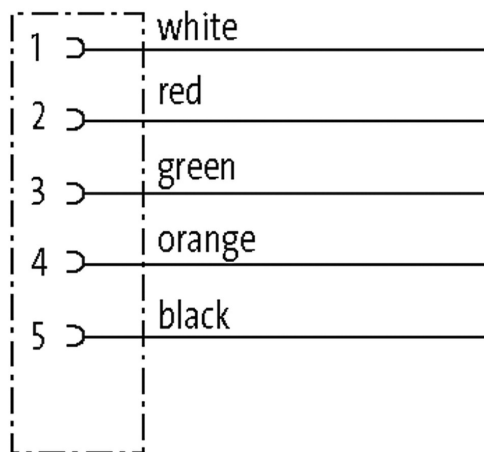
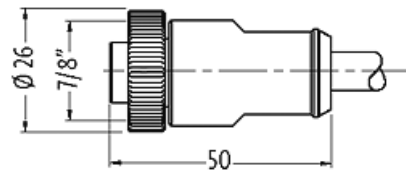
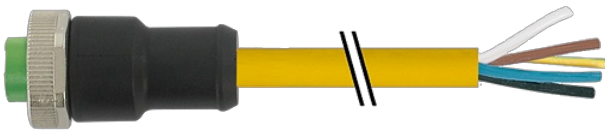
USA

without cable sleeves

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**[Link to Product](#)****Illustration**

Product may differ from Image



\* only for products with UL/CSA approved cable

**Form**

Form A5021

**Technical Data**

Operating voltage	max. 600 V AC/DC
Rated surge voltage	4.0 kV
Operating current per contact	max. 9 A
No. of poles	5
LED display	no
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Compression gland	7/8" (SW24)
Protection	IP68 inserted and tightened (EN 60529)

Locking material	Zinc die casting, matte nickel plated
------------------	---------------------------------------

Material	PUR
----------	-----

#### General data

Mounting method	inserted, tightened
-----------------	---------------------

Pollution Degree	3
------------------	---

Temperature range	-25...+80 °C, depending on cable quality
-------------------	--

#### Cables

Cable number	UBD
--------------	-----

No./diameter of wires	5× 1.5 mm <sup>2</sup>
-----------------------	------------------------

Construction (core)	approx. 3.1 mm
---------------------	----------------

Wire isolation	PVC (bk, or, gn, rd, wh)
----------------	--------------------------

Jacket Color	yellow
--------------	--------

Material (jacket)	PVC (UL/CSA)
-------------------	--------------

Outer Ø	12.7 mm ±5%
---------	-------------

Bend radius (fixed)	10× outer Ø
---------------------	-------------

Bend radius (moving)	15× outer Ø
----------------------	-------------

Temperature range (fixed)	-50...+105 °C
---------------------------	---------------

Temperature range (mobile)	-20...+90 °C
----------------------------	--------------

#### Commercial data

country of origin	DE
-------------------	----

customs tariff number	85444290
-----------------------	----------

EAN	4048879644426
-----	---------------

eClass	27279218
--------	----------

Packaging unit	1
----------------	---