

**M8 female 90° A-cod. snap-in with cable**

PUR 3x0.25 gy UL/CSA+drag ch. 7.5m


Female 90°

M8 (Snap In), 3-pole  
with cable sleeves

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.


Further cable lengths on request.

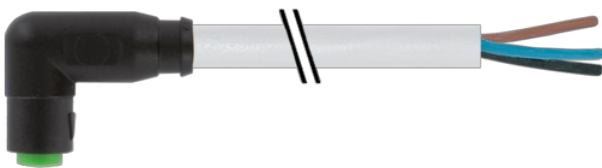**[Link to Product](#)****Illustration**

Female



Product may differ from Image



\* only for products with UL/CSA approved cable

**Form**

Form 08241

**Technical Data**

Operating voltage max. 50 V AC/60 V DC

|   |  |
|---|--|
| Operating voltage (only UL listed)        | max. 30 V AC/DC                        |
| Rated surge voltage                       | 1.5 kV                                 |
| Operating current per contact             | max. 4 A                               |
| Material group                            | IEC 60664-1, category I                |
| Locking of ports                          | M8 Snap In                             |
| Protection                                | IP65 inserted and tightened (EN 60529) |
| Material                                  | PUR                                    |
| suitable for corrugated tube (internal Ø) | 6.5 mm                                 |

**General data**

|                           |  |
|---------------------------|--|
| Standards                 | DIN EN 61076-2-104 (M8)                  |
| Pollution Degree          | 3  |
| Stripping length (jacket) | 20 mm                                    |
| Temperature range         | -25...+85 °C, depending on cable quality |

**Cables**

|                                    |  |
|------------------------------------|--|
| No./diameter of wires              | 3× 0.25 mm <sup>2</sup>  |
| Wire isolation                     | PP (br, bl, bk)  |
| C-track properties                 | 10 Mio.  |
| Outer Ø                            | 4.1 mm ±5%   |
| Cable identification               | 230  |
| Cable Type                         | 3 (PUR)  |
| Approval (cable)                   | cURus (AWM-Style 20549/10493); CE conform  |
| Cable weight [g/m]                 | 26,4 g   |
| Material (wire)                    | Cu wire, bare  |
| Resistor (core)                    | max. 79 Ω/km (20 °C)   |
| Single wire Ø (core)               | 0.1 mm   |
| Construction (core)                | 32× 0.1 mm (multi-strand wire class 6)   |
| Diameter (core)                    | 3× 0.25 mm <sup>2</sup>  |
| AWG                                | similar to AWG 24  |
| Material (wire isolation)          | PP   |
| Material property (wire isolation) | CFC-, halogen-, cadmium-, silicone- and lead-free  |
| Shore hardness (wire isolation)    | 70 ±5 D  |
| Wire-Ø incl. isolation             | 1.25 mm ±5%  |
| Color/numbering of wires           | br, bk, bl   |
| Stranding combination              | 3 wires twisted  |
| Shield                             | no   |
| Material (jacket)                  | PUR  |
| Material property (jacket)         | CFC-, halogen-, cadmium-, silicone- and lead-free, matt, low-adhesion, machine easy to process, abrasion-resistant, hydrolysis and microbial resistant |
| Shore hardness (jacket)            | 90 ±5 A  |
| Outer-Ø (jacket)                   | 4.1 mm ±5%   |
| Color (jacket)                     | gray   |
| Jacket Color                       | gray   |
| chemical resistance                | good resistance to oil, gasoline and chemicals (EN 60811-404)  |
| thermal resistance                 | flame retardand UL 1581 Section 1090 (H), CSA FT2 / IEC 60332-2-2  |
| Nominal voltage                    | 300 V AC   |
| Test voltage                       | 2500 V AC  |
| Current load capacity              | to DIN VDE 0298-4  |
| Temperature range (fixed)          | -40...+80 °C   |
| Temperature range (fixed)          | -40...+80 °C, (+90 °C at max. 10 000 operating hours)  |
| Temperature range (mobile)         | -25...+80 °C   |
| Temperature range (mobile)         | -25...+80 °C, (+90 °C at max. 10 000 operating hours)  |
| Bend radius (fixed)                | 5× outer Ø   |
| Bend radius (moving)               | 10× outer Ø  |
| Bend radius (moving)               | 10× outer Ø  |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

|                                 |                          |
|---------------------------------|--------------------------|
| No. of bending cycles (C-track) | max. 10 Mio. (25 °C)     |
| Travel speed (C-track)          | max. 3 m/s               |
| Acceleration (C-track)          | max. 10 m/s <sup>2</sup> |
| Torsion stress                  | ±180°/m                  |
| No. of torsion cycles           | max. 2 Mio. (25 °C)      |
| Torsion speed                   | 35 cycles/min            |
| Material (jacket)               | PUR (UL/CSA)             |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| country of origin     | DE            |
| customs tariff number | 85444290      |
| EAN                   | 4048879420662 |
| eClass                | 27279218      |
| Packaging unit        | 1.000         |