

## Valve plug SuperSeal female 4-pol. with cable

PUR 4x0.75 bk 10m

Xtreme - Outdoor

Male straight

max. 24 V DC

4-pole

without components

without cable sleeves



Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.


Further cable lengths on request.

### Link to Product

#### Illustration

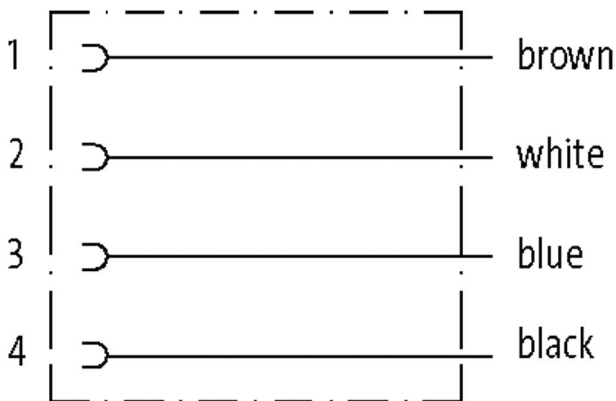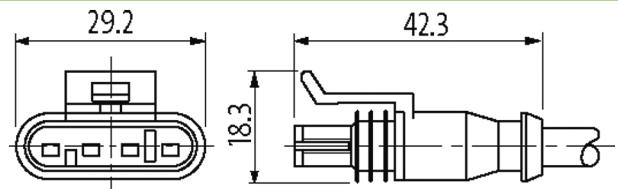

Male  
female contacts

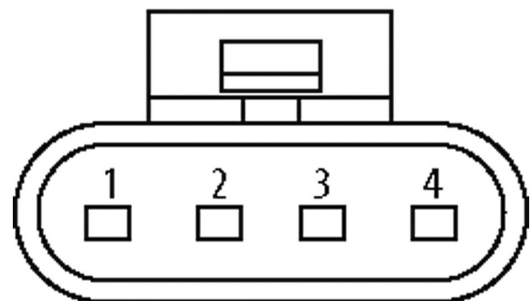

Product may differ from Image

#### Form

Form 73161

#### Technical Data

Operating voltage	max. 24 V DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 7 A
No. of poles	4-pole
LED display	no
Locking of ports	Snap-in connector
Protection	IP67 inserted and tightened (EN 60529)
Material	PUR
suitable for corrugated tube (internal Ø)	11 mm
Housing	AMP SuperSeal 1.5, black plastic
Additional suppressor	without components

#### General data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Mounting method	inserted
Material (contact)	Copper alloy
Material (contact surface)	Sn
Material (gasket)	Silicon
Pollution Degree	3
Temperature range	-40...+125 °C, depending on cable quality

#### Cables

Cable number	514
No./diameter of wires	4× 0.75 mm <sup>2</sup>
Wire isolation	PP (br, wh, bl, bk)
C-track properties	2 Mio.
Jacket Color	black
Material (jacket)	PUR (UL)
Outer Ø	5.7 mm ±5%
Bend radius (moving)	6× outer Ø
Temperature range (mobile)	-25...+80 °C
Cable identification	514
Material (wire)	Cu wire, bare
Resistor (core)	max. 58 Ω/km (20 °C)
Construction (core)	42× 0.15 mm (multi-strand wire class 6)
Diameter (core)	4× 0.75 mm <sup>2</sup>
AWG	similar to AWG 18
Material (wire isolation)	PP
Wire-Ø incl. isolation	1.79 mm ±5%
Color/numbering of wires	br, bk, bl, wh
Stranding combination	4 wires twisted
Shield	no
Material (jacket)	PUR
Outer-Ø (jacket)	5.7 mm ±5%
Color (jacket)	black
Nominal voltage	300 V
Temperature range (mobile)	-25...+80 °C
Bend radius (moving)	6× outer Ø

#### Commercial data

country of origin	DE
customs tariff number	85444290
EAN	4048879682497
eClass	27279218
Packaging unit	1