

## T-COUPLER SLIMLINE M12 MALE / 2X M12 FEMALE

T-coupler (Slim Line)

Male straight – females straight

M12 – M12

5-pole



Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration

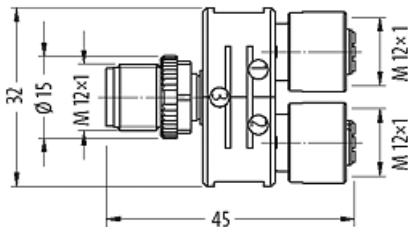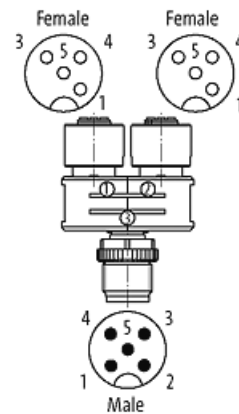

1. Female M12 2. Female

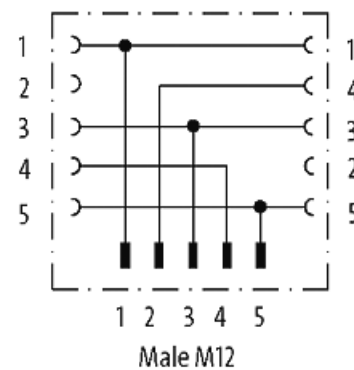

Product may differ from Image



#### Form

Form 41131

#### Technical Data

Operating voltage max. 60 V AC/DC

Operating voltage (only UL listed) 30 V AC/DC

Rated surge voltage 1.5 kV

Operating current per contact max. 4 A

Locking of ports Screw thread (M12x1 mm) recommended torque 0.6 Nm, self-securing

Protection IP67 inserted and tightened (EN 60529)

**General data**

Temperature range -25...+85 °C

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879144865
eClass	27143423
Packaging unit	1