

CUBE67 I/O EXTENSION MODULE

4 multifunction channels, 1 RS485 Port

Expansion module

DIO4 RS485 (E) - 3× M12

Digital inputs/outputs (multifunctional)


Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

S7 function block for SEW MOVIMOT® via www.murrelektronik.com

Link to Product

Illustration

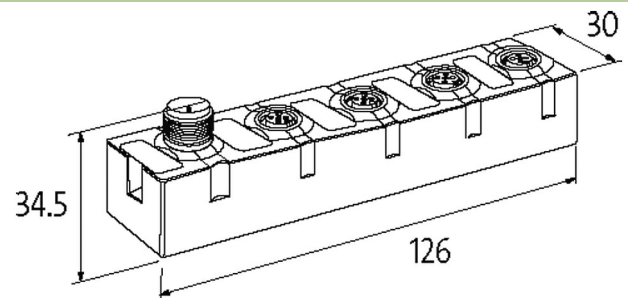

Product may differ from Image



Technical Data

Transfer parameters	9600 Baud, half duplex
RS232-Type	galvanically separated, M12 female 5-pole, B-coded
RS485-Type	galvanically separated, M12 female 5-pole, B-coded

General data

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Protection	IP67
Dimensions H×W×D	126×30×34.5 mm

Output

Lamp load	10 W
Actuator supply UA	24 V DC (EN 61131-2), via system connection (max. 4 A)
Switching current per output	max. 0.5 A (short-circuit and overload protected)

Input

Sensor supply US	24 V DC (EN 61131-2), max. 200 mA (M12 female), short-circuit and overload protected
Type	for 3-wire sensors or mechanical switches, PNP
Input filter	1 ms

Internal communication

LED display	US: sensor supply and internal supply voltage (green: OK); UA: actuator supply (green: OK)
Current consumption	max. 50 mA

Parameterization

PIN 4	Input/Output
PIN 2	Input/Output/Diagnostic

Connections

Fieldbus	via internal system connection
Sensor-system/actuator supply	via internal system connection (max. 2x 4 A)
I/O ports	M12 (female) 5-pole, A-coded

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Actuator warning	per channel via LED and BUS
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes

Commercial data

country of origin	DE
customs tariff number	85389099
EAN	4048879048149
eClass	27242604
Packaging unit	1.000