

**M8 male 0° / M12 female 90° A-cod. F&B**

PVC 3x0.25 gy UL/CSA 0.5m

F&B

Male straight – female 90°

M8 – M12, 3-pole

Stainless steel 1.4404 (V4A)

Profile gasket





Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

**Illustration**

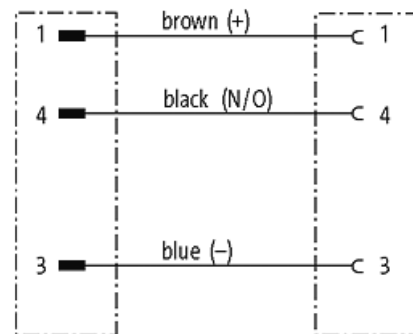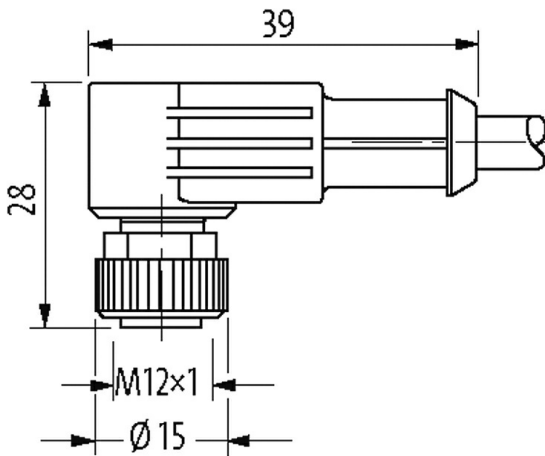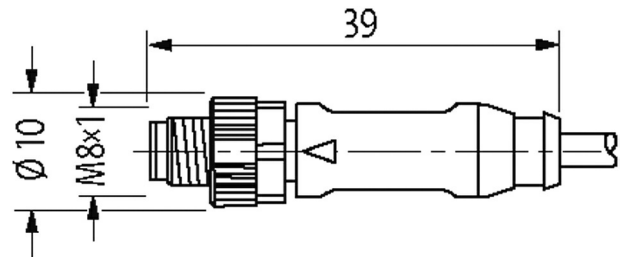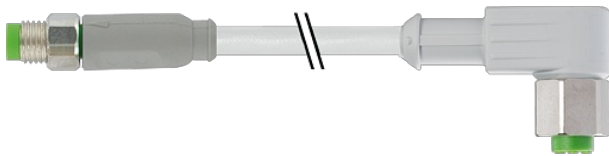

Male



Female



Product may differ from Image



**Form**

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Form 88261

| Technical Data                            |   |
|---|---|
| Operating voltage                         | 50 V AC/60 V DC   |
| Operating current per contact             | max. 4 A  |
| Material group                            | IEC 60664-1, category I   |
| Locking of ports                          | Screw thread (M8/M12×1 mm) recommended torque 0.4/0.6 Nm, self-securing |
| Compression gland                         | M8 (SW9), M12 (SW14)  |
| Protection                                | IP66K, IP67 inserted and tightened (EN 60529)                           |
| Locking material                          | Stainless steel 1.4404 (V4A)  |
| suitable for corrugated tube (internal Ø) | M12 (10 mm); M8 (6.5 mm)  |
| Rated surge voltage                       | 1.5 kV  |
| General data                              |   |
| Pollution Degree                          | 3   |
| Temperature range                         | -25...+85 °C, depending on cable quality                                |
| Cables                                    |   |
| Cable identification                      | 210   |
| Cable Type                                | 1 (PVC)   |
| Approval (cable)                          | UL (AWM-Style 2464/1731), CSA   |
| Cable weight [g/m]                        | 29,37   |
| Material (wire)                           | Cu wire, bare   |
| Resistor (core)                           | max. 79 Ω/km (20 °C)  |
| Single wire Ø (core)                      | 0.15 mm   |
| Construction (core)                       | 14× 0.15 mm (multi-strand wire class 5)                                 |
| Diameter (core)                           | 3× 0.25 mm <sup>2</sup>   |
| AWG                                       | similar to AWG 24   |
| Material (wire isolation)                 | PVC   |
| Material property (wire isolation)        | CFC-, cadmium-, silicone- and lead-free                                 |
| Shore hardness (wire isolation)           | 45 ±5 D   |
| Wire-Ø incl. isolation                    | 1.25 mm ±5%   |
| Color/numbering of wires                  | br, bk, bl  |
| Stranding combination                     | 3 wires twisted   |
| Shield                                    | no  |
| Material (jacket)                         | PVC   |
| Material property (jacket)                | CFC-, cadmium-, silicone- and lead-free                                 |
| Shore hardness (jacket)                   | 85 ±5 A   |
| Outer-Ø (jacket)                          | 4.5 mm ±5%  |
| Color (jacket)                            | gray  |
| chemical resistance                       | good resistance to oil, gasoline and chemicals                          |
| thermal resistance                        | flame retardant UL 1581 VW1 / CSA FT1                                   |
| Nominal voltage                           | UL 300 V AC   |
| Test voltage                              | 2000 V AC   |
| Current load capacity                     | to DIN VDE 0298-4   |
| Temperature range (fixed)                 | -30...+80 °C  |
| Temperature range (mobile)                | -5...+80 °C   |
| Bend radius (fixed)                       | 5× outer Ø  |
| Bend radius (moving)                      | 10× outer Ø   |
| No./diameter of wires                     | 3× 0.25 mm <sup>2</sup>   |
| Wire isolation                            | PVC (br, bl, bk)  |
| Jacket Color                              | gray  |
| Material (jacket)                         | PVC (UL/CSA)  |
| Outer Ø                                   | 4.5 mm ±5%  |
| Bend radius (moving)                      | 10× outer Ø   |
| Temperature range (fixed)                 | -30...+80 °C  |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Temperature range (mobile) -5...+80 °C

**Commercial data**

|                       |               |
|-----------------------|---------------|
| country of origin     | DE            |
| customs tariff number | 85444290      |
| EAN                   | 4048879619363 |
| eClass                | 27279218      |
| Packaging unit        | 1             |