


Cube67 I/O Cable-Module, I/O Extension Module

DO16, Open-End, 0,5m

Expansion module
DO16 - Valve (E) 0.5 m
with open ended wires (70 mA)
Connection cables are in the online shop under "Connection Technology".
Housing fully potted.

Link to Product

Illustration

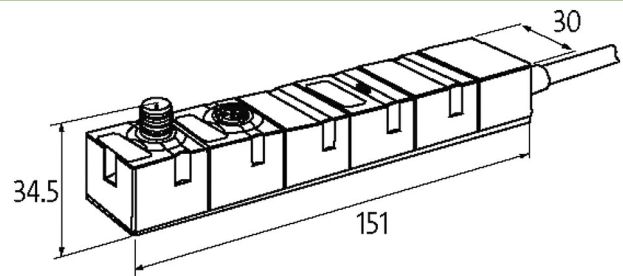

Product may differ from Image



General data

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Protection	IP67
Dimensions HxWxD	150x30x34.5 mm

Output

Actuator supply UA	24 V DC (EN 61131-2), via system connection (max. 4 A)
Switching current per output	max. 60 mA (short-circuit and overload protected)

Cables

No./diameter of wires	18x 0.25 mm ²
Material (jacket)	PVC
Cable Length	0.5 m

Internal communication

LED display	US: sensor supply and internal supply voltage (green: OK); UA: actuator supply (green: OK)
Current consumption	max. 50 mA

Connections

Fieldbus	via internal system connection
Sensor-system/actuator supply	via internal system connection (max. 2x 4 A)
I/O ports	Open cable

Diagnostic

Communication status	via LED
Diagnostic via LED	per module
Diagnostic via BUS	per module and channel
Actuator warning	per channel via BUS
Monitoring - under voltage	yes

Monitoring - no voltage	yes
Short-circuit and overload	yes
Commercial data	
country of origin	CZ
customs tariff number	85444290
EAN	4048879048408
eClass	27242604
Packaging unit	1.000