

Siemens  
EcoTech



Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, spring-type terminal, with laser labeling, upper case



|  |  |
|--|--|
| product brand name   | SIRIUS ACT   |
| product designation  | Selector switches  |
| design of the product  | Complete unit  |
| product type designation   | 3SU1   |
| product line   | Plastic, black, 22 mm  |
| manufacturer's article number  |  |
| <ul style="list-style-type: none"> <li>• of supplied contact module at position 1</li> <li>• of supplied contact module at position 2</li> <li>• of the supplied holder</li> <li>• of the supplied actuator</li> </ul> | <a href="#">3SU1400-1AA10-3BA0</a><br><a href="#">3SU1400-1AA10-3CA0</a><br><a href="#">3SU1550-0AA10-0AA0</a><br><a href="#">3SU1002-2BF60-0AA0</a> |
| <b>Enclosure</b>   |  |
| number of command points   | 1  |
| <b>Actuator</b>  |  |
| design of the actuating element  | Selector, short  |
| principle of operation of the actuating element  | latching, 90° (10:30 h/13:30 h)  |
| product extension optional light source  | Yes  |
| color of the actuating element   | white  |
| material of the actuating element  | plastic  |
| shape of the actuating element   | round  |
| outer diameter of the actuating element  | 32.3 mm  |
| marking of the actuating element   | Customized labeling, text in capital letters   |
| number of contact modules  | 2  |
| number of switching positions  | 2  |
| actuating angle  |  |
| <ul style="list-style-type: none"> <li>• clockwise</li> </ul>  | 90°  |
| <b>Front ring</b>  |  |
| product component front ring   | Yes  |
| design of the front ring   | standard   |
| material of the front ring   | plastic  |
| color of the front ring  | black  |
| <b>Holder</b>  |  |
| material of the holder   | Plastic  |
| <b>Display</b>   |  |
| number of LED modules  | 0  |
| <b>General technical data</b>  |  |
| product function positive opening  | Yes  |
| product component light source   | No   |

|  |   |
|--|---|
| <b>insulation voltage rated value</b>  | 500 V   |
| <b>degree of pollution</b>   | 3   |
| type of voltage of the operating voltage   | AC/DC   |
| <b>surge voltage resistance rated value</b>  | 6 kV  |
| <b>protection class IP</b>   | IP66, IP67, IP69(IP69K)   |
| protection class IP of the terminal  | IP20  |
| <b>degree of protection NEMA rating</b>  | 1, 2, 3, 3R, 4, 4X, 12, 13  |
| <b>shock resistance</b>  |   |
| <ul style="list-style-type: none"> <li>● according to IEC 60068-2-27</li> <li>● for railway applications according to EN 61373</li> </ul>  | sinusoidal half-wave 15g / 11 ms<br>Category 1, Class B   |
| <b>vibration resistance</b>  |   |
| <ul style="list-style-type: none"> <li>● according to IEC 60068-2-6</li> <li>● for railway applications according to EN 61373</li> </ul>   | 10 ... 500 Hz: 5g<br>Category 1, Class B  |
| <b>operating frequency maximum</b>   | 1 800 1/h   |
| <b>mechanical service life (operating cycles) typical</b>  | 1 000 000   |
| electrical endurance (operating cycles) typical  | 10 000 000  |
| <b>thermal current</b>   | 10 A  |
| <b>reference code according to IEC 81346-2</b>   | S   |
| <b>continuous current of the C characteristic MCB</b>  | 10 A; for a short-circuit current smaller than 400 A  |
| <b>continuous current of the quick DIAZED fuse link</b>  | 10 A  |
| <b>continuous current of the DIAZED fuse link gG</b>   | 10 A  |
| <b>Substance Prohibitance (Date)</b>   | 10/01/2014  |
| <b>Weight</b>  | 0.025 kg  |
| <b>operating voltage</b>   |   |
| <ul style="list-style-type: none"> <li>● at AC <ul style="list-style-type: none"> <li>— at 50 Hz rated value</li> <li>— at 60 Hz rated value</li> </ul> </li> <li>● at DC rated value</li> </ul>                           | 5 ... 500 V<br>5 ... 500 V<br>5 ... 500 V   |
| <b>Power Electronics</b>   |   |
| <b>contact reliability</b>   | One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA)  |
| <b>Auxiliary circuit</b>   |   |
| <b>design of the contact of auxiliary contacts</b>   | Silver alloy  |
| <b>number of NC contacts for auxiliary contacts</b>  | 1   |
| <b>number of NO contacts for auxiliary contacts</b>  | 1   |
| <b>Connections/ Terminals</b>  |   |
| <b>type of electrical connection</b>   | spring-loaded terminals   |
| <ul style="list-style-type: none"> <li>● of modules and accessories</li> </ul>   | Spring-type terminal  |
| <b>type of connectable conductor cross-sections</b>  |   |
| <ul style="list-style-type: none"> <li>● solid without core end processing</li> <li>● finely stranded with core end processing</li> <li>● finely stranded without core end processing</li> <li>● for AWG cables</li> </ul> | 2x (0.25 ... 1.5 mm <sup>2</sup> )<br>2x (0.25 ... 0.75 mm <sup>2</sup> )<br>2x (0.25 ... 1.5 mm <sup>2</sup> )<br>2x (24 ... 16)             |
| <b>tightening torque of the screws in the bracket</b>  | 1 ... 1.2 N·m   |
| <b>Safety related data</b>   |   |
| <b>proportion of dangerous failures</b>  |   |
| <ul style="list-style-type: none"> <li>● with low demand rate according to SN 31920</li> <li>● with high demand rate according to SN 31920</li> </ul>  | 20 %<br>20 %  |
| <b>B10 value with high demand rate according to SN 31920</b>   | 100 000   |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>   | 100 FIT   |
| <b>IEC 61508</b>   |   |
| T1 value for proof test interval or service life according to IEC 61508  | 20 a  |
| <b>Ambient conditions</b>  |   |
| <b>ambient temperature</b>   |   |
| <ul style="list-style-type: none"> <li>● during operation</li> <li>● during storage</li> </ul>   | -25 ... +70 °C<br>-40 ... +80 °C  |
| environmental category during operation according to IEC 60721   | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted for all devices behind front panel) |
| <b>Environmental footprint</b>   |   |
| Environmental Product Declaration (EPD)  | Yes   |

|  |                 |
|--|-----------------|
| Global Warming Potential [CO2 eq] total                | 0.787 kg        |
| Global Warming Potential [CO2 eq] during manufacturing | 0.566 kg        |
| Global Warming Potential [CO2 eq] during operation     | 0.235 kg        |
| Global Warming Potential [CO2 eq] after end of life    | -0.015 kg       |
| Siemens Eco Profile (SEP)                              | Siemens EcoTech |

### Installation/ mounting/ dimensions

|  |                      |
|--|----------------------|
| <b>fastening method</b>                            |                      |
| • of modules and accessories                       | Front plate mounting |
| <b>height</b>                                      | 40 mm                |
| <b>width</b>                                       | 32.3 mm              |
| <b>shape of the installation opening</b>           | round                |
| <b>mounting diameter</b>                           | 22.3 mm              |
| <b>positive tolerance of installation diameter</b> | 0.4 mm               |
| <b>mounting height</b>                             | 28.8 mm              |
| <b>installation width</b>                          | 32.3 mm              |
| <b>installation depth</b>                          | 49.7 mm              |

### Approvals Certificates

|                          |                   |
|--------------------------|-------------------|
| General Product Approval | Test Certificates |
|--------------------------|-------------------|

[Confirmation](#)



[Type Test Certificates/Test Report](#)

|                   |       |             |
|-------------------|-------|-------------|
| Test Certificates | other | Environment |
|-------------------|-------|-------------|

[Special Test Certificate](#)

[Confirmation](#)



Siemens EcoTech



[Environmental Confirmations](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1100-2BF60-3MA0-Z Y11>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1100-2BF60-3MA0-Z Y11>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1100-2BF60-3MA0-Z Y11>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1100-2BF60-3MA0-Z Y11&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1100-2BF60-3MA0-Z Y11&lang=en)

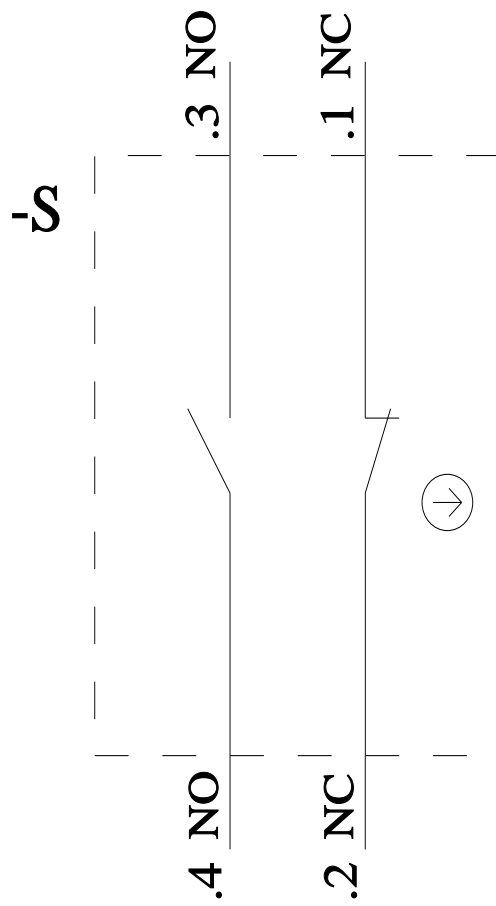

last modified:

3/2/2024 ↻