

QUINT-DIODE/40 - Redundancy module



2938963

<https://www.phoenixcontact.com/gb/products/2938963>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Redundancy module QUINT-DIODE/40



Commercial data

Item number	2938963
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CMRP43
Product key	CMRP43
GTIN	4017918929534
Weight per piece (including packing)	683 g
Weight per piece (excluding packing)	600 g
Customs tariff number	85049090
Country of origin	CN

QUINT-DIODE/40 - Redundancy module



2938963

<https://www.phoenixcontact.com/gb/products/2938963>

Technical data

Input data

DC operation

Input voltage	24 V DC
Nominal input voltage range	24 V DC
Input voltage range	0 V DC ... 30 V DC
Input voltage range DC	0 V DC ... 30 V DC
Voltage type of supply voltage	DC
Reverse polarity protection	< yes60 V
Nominal input current (I_N)	2x 20 A 1x 40 A
Maximum current I_{max}	2x 19 A (6 mm ² at 40°C) 1x 39 A (6 mm ² at 40°C) 2x 16 A (6 mm ² at 60°C) 1x 32 A (6 mm ² at 60°C) 2x 27 A (10 mm ² at 40°C) 1x 54 A (10 mm ² at 40°C) 2x 21 A (10 mm ² at 60°C) 1x 43 A (10 mm ² at 60°C) 2x 30 A (16 mm ² at 40 °C) 1x 60 A (16 mm ² at 40 °C) 2x 24 A (16 mm ² at 60°C) 1x 48 A (16 mm ² at 60°C)
Transient surge protection	Transil diode
Voltage drop, input/output	0.5 V

Output data

Efficiency	> 97 %
Nominal output voltage	24 V DC
Nominal output current (I_N)	40 A
Power loss nominal load max.	20 W
Connection in series	no

Connection data

Input

Connection method	Screw connection
Conductor cross section, rigid min.	0.5 mm ²
Conductor cross section, rigid max.	16 mm ²
Conductor cross section flexible min.	0.5 mm ²
Conductor cross section flexible max.	10 mm ²
Conductor cross section AWG min.	20

QUINT-DIODE/40 - Redundancy module



2938963

<https://www.phoenixcontact.com/gb/products/2938963>

Conductor cross section AWG max.	6
Stripping length	10 mm
Screw thread	M4

Output

Connection method	Screw connection
Conductor cross section, rigid min.	0.5 mm ²
Conductor cross section, rigid max.	16 mm ²
Conductor cross section flexible min.	0.5 mm ²
Conductor cross section flexible max.	10 mm ²
Conductor cross section AWG min.	20
Conductor cross section AWG max.	6
Stripping length	10 mm
Screw thread	M4

Electrical properties

Insulation voltage output / PE	1 kV
Insulation voltage input / PE	1 kV
Insulation voltage input, output / housing	1 kV

Product properties

Product type	Redundancy module
Product family	QUINT DIODE
MTBF (IEC 61709, SN 29500)	28571428 h (40 °C)
LED	no

Insulation characteristics

Protection class	II (in closed control cabinet)
Degree of pollution	2

Dimensions

Width	62 mm
Height	84 mm
Depth	102 mm
Horizontal pitch	3.4 Div.

Installation dimensions

Installation distance right/left	5 mm / 5 mm
Installation distance top/bottom	50 mm / 50 mm

Mounting

Mounting type	DIN rail mounting
Assembly note	alignable: horizontal 20 mm, vertical 50 mm
Mounting position	horizontal and vertical DIN rail NS 35, EN 60715

Material specifications

QUINT-DIODE/40 - Redundancy module



2938963

<https://www.phoenixcontact.com/gb/products/2938963>

Housing material	Metal
Type of housing	AlMg (hood), GD-ZnAlCu (cooling unit)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (> 60 °C derating,

QUINT-DIODE/40 - Redundancy module




2938963

<https://www.phoenixcontact.com/gb/products/2938963>

Drawings

Block diagram

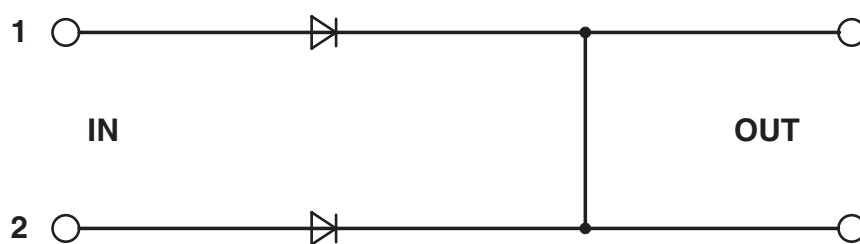

QUINT-DIODE/40 - Redundancy module

2938963

<https://www.phoenixcontact.com/gb/products/2938963>



Classifications

UNSPSC

UNSPSC 21.0	32151504
-------------	----------

QUINT-DIODE/40 - Redundancy module



2938963

<https://www.phoenixcontact.com/gb/products/2938963>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-25
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk