

IBS ST 24 BKM-T - Bus coupler

2750154

<https://www.phoenixcontact.com/gb/products/2750154>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



INTERBUS-ST bus terminal module, 24 V DC, with 8-pos. MINI-COMBICON plug, IP20 protection, consisting of: Terminal part with screw connection and module electronics

Product description

INTERBUS ST standard bus terminal modules

The INTERBUS bus terminal module connects the input/output modules of an ST station with the INTERBUS network.

Depending on the transmission medium used, the bus terminal modules are equipped with different bus connections. For copper conductors, D-SUB and MINI-COMBICON connectors are available. The fiber optic versions are equipped with F-SMA connectors.

The bus terminal modules are available in two different performance classes. A maximum of 4 or 8 input/output modules can be operated on one bus terminal module.

The bus terminal module takes on the following functions within a modular INTERBUS-ST station:

- Refreshing the INTERBUS remote bus signals
- Electrical isolation of the remote bus segments
- Decoupling of the outgoing remote bus or of the connected input/ output modules from the INTERBUS network with a software command
- Supply of the connected input/output modules with an electrically isolated voltage supply from an integrated power supply unit

Your advantages

- Copper or fiber optic connection
- Additional I/Os onboard
- Additional remote/local bus branches

Commercial data

Item number	2750154
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRI311
Product key	DRI311
GTIN	4017918108298
Weight per piece (including packing)	283 g
Weight per piece (excluding packing)	200 g
Customs tariff number	85389091
Country of origin	DE

IBS ST 24 BKM-T - Bus coupler


2750154

<https://www.phoenixcontact.com/gb/products/2750154>



Technical data

Dimensions

Dimensional drawing	
Width	44 mm
Height	117 mm
Depth	116 mm

Material specifications

Color	green
-------	-------

Interfaces

ST local bus

Connection method	ST local bus connector
Transmission speed	500 kbps

INTERBUS

Connection method	8-pos. MINI COMBICON connector
Designation connection point	Incoming/Outgoing Remote Bus
Number of positions	8

Fieldbus: Local bus gateway

Max. number of local bus devices	max. 4
----------------------------------	--------

Input data

Digital:

Connection technology	Screw connection
-----------------------	------------------

Product properties

Product type	I/O component
Product family	Smart Terminal ST
Type	modular INTERBUS Smart Terminal
Mounting position	Horizontal DIN rail

Electrical properties

Supply: Module electronics

IBS ST 24 BKM-T - Bus coupler



2750154

<https://www.phoenixcontact.com/gb/products/2750154>

Supply voltage	24 V DC
Supply voltage range	20 V DC ... 30 V DC (including ripple)
Current consumption	typ. 150 mA (without ST module expansions) typ. 350 mA (For maximum number of I/O modules on the ST local bus)
Ripple	3.6 V _{pp} within the allowable voltage range

Electrical isolation/isolation of the voltage ranges

Test voltage: Incoming remote bus / Outgoing remote bus	500 V AC, 50 Hz, 1 min
Test voltage: Incoming remote bus/ST interface	500 V AC, 50 Hz, 1 min

Connection data

Connection technology

Connection name	Terminal block
-----------------	----------------

Conductor connection

Connection method	MINI COMBICON
Conductor cross-section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross-section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 12
Stripping length	8 mm

Terminal block

Connection method	MINI COMBICON
Conductor cross-section, rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross-section, flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 12
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	0 °C ... 55 °C
Degree of protection	IP20
Air pressure (operation)	86 kPa ... 108 kPa (up to 1500 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (up to 3500 m above sea level)
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Permissible humidity (operation)	30 % ... 75 % (non-condensing)
Permissible humidity (storage/transport)	30 % ... 95 % (non-condensing)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	DIN rail mounting
Mounting position	Horizontal DIN rail


IBS ST 24 BKM-T - Bus coupler

2750154


<https://www.phoenixcontact.com/gb/products/2750154>

Drawings

Dimensional drawing

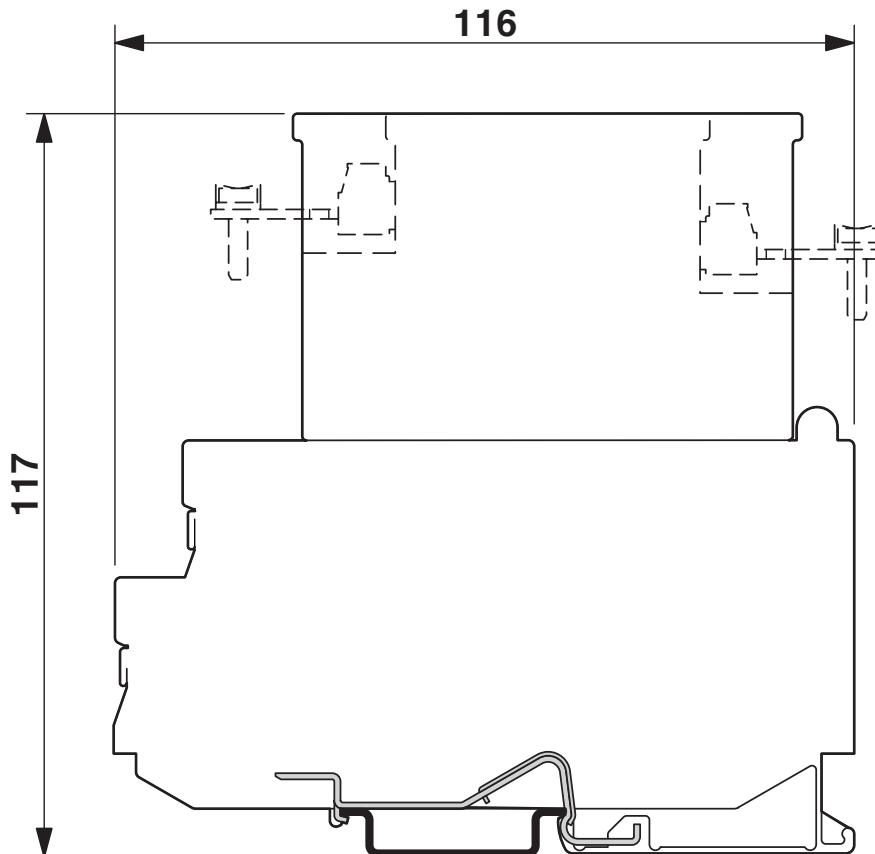

Connection diagram

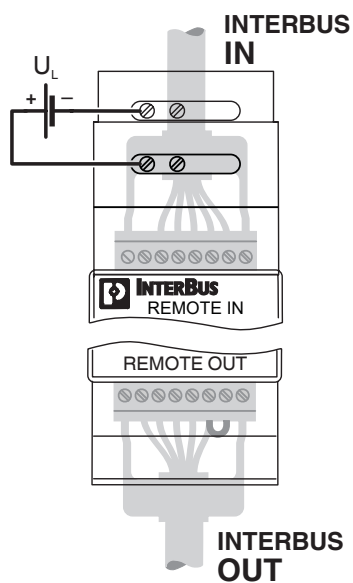

IBS ST 24 BKM-T - Bus coupler

2750154

<https://www.phoenixcontact.com/gb/products/2750154>



Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/2750154>

INTERBUS CLUB

Approval ID: 300/07.07.00

IBS ST 24 BKM-T - Bus coupler



2750154

<https://www.phoenixcontact.com/gb/products/2750154>

Classifications

ECLASS

ECLASS-13.0	27242608
ECLASS-15.0	27242608

ETIM

ETIM 8.0	EC001604
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

IBS ST 24 BKM-T - Bus coupler



2750154

<https://www.phoenixcontact.com/gb/products/2750154>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk