



SIM2500-2P03G10

SIM2x00

EDGE COMPUTING DEVICES

SICK
Sensor Intelligence.



Ordering information

Type	part no.
SIM2500-2P03G10	1092673

Other models and accessories → www.sick.com/SIM2x00



Detailed technical data

Features

Product category	Programmable
Generation	Second generation
Supported products	2D and 3D cameras from SICK or based on the GigE machine vision standard 2D and 3D LiDAR sensors Image-based code readers Bar code scanners RFID read/write device Displacement measurement sensors Incremental and absolute encoders Photoelectric sensors
Processor	8-core ARM Cortex-A72 CPU with NEON accelerator FPGA co-processor for image (pre-)processing
Random Access Memory	4 GB DDR4
Flash memory	7 GB eMMC, of which 5 GB are available for applications
Programming software	SICK AppStudio Can be programmed within the SICK AppSpace environment
Toolkit	SICK algorithm API HALCON (image processing library)
Further functions	FPGA for I/O handling Dedicated fieldbus controller

Mechanics/electronics

Connections	I/O, Power, SERIAL, INC, Fieldbus, CAN, SENSOR S1-S4, SENSOR S5-S6, Ethernet with PoE, USB	1 x M12, 8-pin female connector, A-coded, 1 x M12, 4-pin male connector, T-coded, 1 x M12, 8-pin female connector, A-coded, 1 x M12, 8-pin female connector, A-coded, 2 x M12, 4-pin female connector, D-coded, 1 x M12, 5-pin female connector, A-coded, 4 x M12, 5-pin female connector, A-coded, 2 x M12, 5-pin female connector, A-coded, 4 x M12, 8-pin female connector, X-coded, 1 x Micro-B, Under the servicing panel, Under the servicing panel
Supply voltage		24 V DC, ± 10 %
Power consumption		Typ. 45 W, without connected sensor
Power output		140 W, total, all connections
Output current		
	SENSOR S1-S4	≤ 1 A (on power supply pin)

	SENSOR S5-S6	≤ 2.5 A (on power supply pin)
	SENSOR S5-S6	≤ 3.2 A (≤ 10 kHz, rise time/fall time/delay < 10µs when power gate-API used)
	CAN	≤ 1 A (on power supply pin)
	SERIAL	≤ 0.5 A (on power supply pin)
	INC	≤ 500 mA (on power supply pin)
	I/O	≤ 500 mA (on power supply pin)
Enclosure rating		IP65
Protection class		III
Electrical safety		EN 61010
Housing material		Aluminum die cast
Housing color		Light blue (RAL 5012)
Weight		1,995 g
Dimensions (L x W x H)		176 mm x 83 mm x 196 mm

Interfaces

Ethernet		✓ (4) , TCP/IP, FTP, OPC UA, MQTT
	Remark	GigE machine vision/GenICAM, Fieldbus ports, in preparation
	Function	Data output, Configuration, firmware update, image transmission
	Data transmission rate	20 kbit/s ... 230 kBaud, 10/100/1,000/2,500 Mbit/s
PROFINET		✓ (2) , RS-232, RS-422, RS-485
	Remark	Fieldbus-Ports
	Function	Dual port Ethernet-based fieldbus, Also configurable as RS-422, firmware update
	Data transmission rate	≤ 1 Mbit/s, 10/100 MBit/s
EtherNet/IP™		✓ (2) , RS-422
	Remark	Fieldbus ports, in preparation
	Function	Dual port Ethernet-based fieldbus, diagnosis
	Data transmission rate	10/100 MBit/s
EtherCAT®		✓ (2) , USB 2.0
	Remark	Fieldbus ports, in preparation
	Function	Dual port Ethernet-based fieldbus
	Data transmission rate	10/100 MBit/s
IO-Link		✓ (4) , RS-232
	Remark	SENSOR S1-S4
	Function	IO-Link Master 1.1
	Data transmission rate	RS-232: 115,2 kBaud, RS-422/RS-485: 2 MBaud
Serial		✓ , RS-422
	Function	Can also be configured as an encoder interface, max. frequency 2 MHz
	Data transmission rate	Max. frequency 2 MHz; RS-422: 2 MBaud
Incremental		✓ (4)
	Function	Interface for encoder
CAN		✓
	Function	SICK CAN sensor network CSN (CAN controller/CAN device, multiplexer/server) with activatable termination resistor

USB		✓
	Function	For configuration
Operator interfaces		Web server (GUI), SICK AppStudio (programming), SICK AppManager (app installation, firmware update)
Data storage and retrieval		Image and data logging via optional microSD memory card, internal RAM and external FTP
Memory card(s)		Industry-grade microSD memory card (flash card), max. 32 GB, optional
Digital inputs/outputs		
	I/O	2 opto-decoupled inputs (Max. frequency: 30 kHz)
	I/O	2 inputs/outputs (can be configured) (Max. frequency: 30 kHz)
	SENSOR S1-S4	1 input each (Max. frequency: 30 kHz)
	SENSOR S1-S4	1 input/output each (can be configured) (Max. frequency: 30 kHz)
	SENSOR S5-S6	1 input each (Max. frequency: 10 kHz)
	SENSOR S5-S6	2 inputs/outputs each (can be configured) (Max. frequency: 30 kHz)
Control elements		1 selector switch (under the servicing panel) 1 functional button (under the servicing panel)

Ambient data

Electromagnetic compatibility (EMC)	IEC 61000-6-2:2016 EN IEC 61000-6-2:2019 IEC 61000-6-3:2020
Shock load	IEC 60068-2-27:2008
Ambient operating temperature	0 °C ... +50 °C ^{1) 2)}
Ambient temperature, storage	-20 °C ... +70 °C ¹⁾

¹⁾ Permissible relative humidity: 0% ... 90% (non-condensing).

²⁾ While taking account of the mounting requirements described, see operating instructions. In the event of overtemperature, the device protects itself by resetting and then restarting.

Classifications





ECLASS 5.0	27242208
ECLASS 5.1.4	27242608
ECLASS 6.0	27242608
ECLASS 6.2	27242608
ECLASS 7.0	27242608
ECLASS 8.0	27242608
ECLASS 8.1	27242608
ECLASS 9.0	27242608
ECLASS 10.0	27242608
ETIM 5.0	EC001604
ETIM 6.0	EC001604
ETIM 7.0	EC001604
ETIM 8.0	EC001604
UNSPSC 16.0901	32151705

Certificates

EU declaration of conformity	✓
UK declaration of conformity	✓

ACMA declaration of conformity	✓
China RoHS	✓

Dimensional drawing

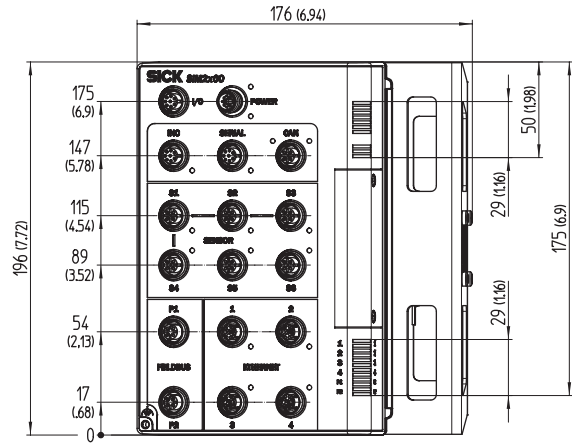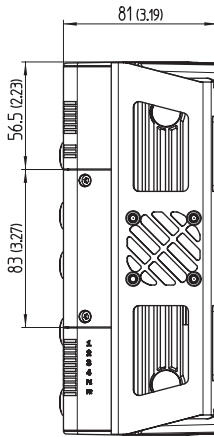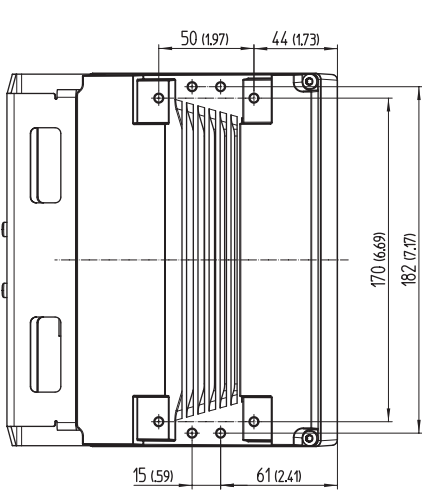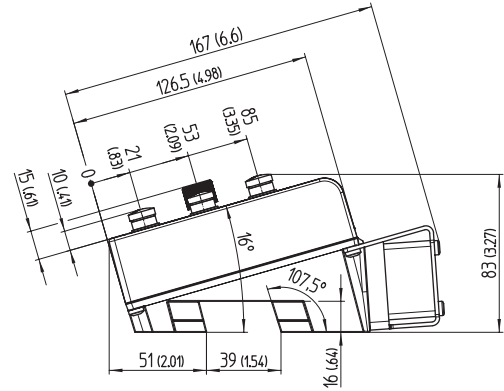

Dimensions in mm (inch)

Overview SICK AppSpace



SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com