




Inductive sensor

IEB3003BBPKG/K1/V4A/US-104

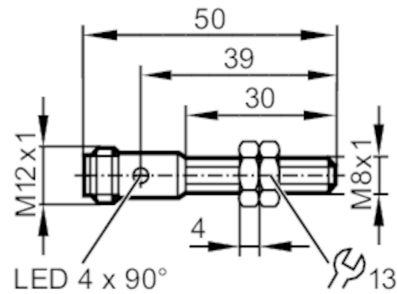

Product characteristics	
Electrical design	PNP
Output function	normally open
Sensing range [mm]	3
Housing	threaded type
Dimensions [mm]	M8 x 1 / L = 50
Application	
Special feature	Increased sensing range; Correction factor K = 1; Magnetic-field immune
Magnetic-field immune	yes
Max. magnetic field immunity [mT]	300
Electrical data	
Operating voltage [V]	10...30 DC
Current consumption [mA]	< 20
Protection class	III
Reverse polarity protection	yes
Outputs	
Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	2000
Short-circuit protection	yes
Overload protection	yes
Detection zone	
Sensing range [mm]	3
Real sensing range Sr [mm]	3 ± 10 %
Operating distance [mm]	0...2.43
Increased sensing range	yes
Accuracy / deviations	
Correction factor	steel: 1 / stainless steel: 1 / brass: 1 / aluminium: 1 / copper: 1
Hysteresis [% of Sr]	3...15
Switch point drift [% of Sr]	-10...10

IES256



Inductive sensor

IEB3003BBPKG/K1/V4A/US-104

Correction factor K = 1	yes
-------------------------	-----

Operating conditions

Ambient temperature [°C]	-40...85
Protection	IP 65; IP 66; IP 67; IP 68; IP 69K

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
Vibration resistance	EN 60068-2-6 Fc	20 g (10...3000 Hz) / 50 sweep cycles, 1 octave per minute, in 3 axes
Shock resistance	EN 60068-2-27 Ea	100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
Continuous shock resistance	EN 60068-2-27 Ea	40 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes
Fast temperature change	EN 60068-2-14 Na	TA = -40 °C; TB = 85 °C; t1 = 30 min; t2 = < 10 s; 50 cycles
Salt spray test	EN 60068-2-52 Kb	severity level 5 (4 test cycles)
MTTF [years]		1222
Embedded software included		yes
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	power supply	Limited Voltage/Current
	UL approval no.	A033
	File number UL	E174191

Mechanical data

Weight [g]	17.35
Housing	threaded type
Mounting	flush mountable
Dimensions [mm]	M8 x 1 / L = 50
Thread designation	M8 x 1
Materials	stainless steel (316L/1.4404); sensing face: LCP white; LED window: PEI; lock nuts: stainless steel (316L/1.4404)
Tightening torque [Nm]	A = 5 mm: 2 Nm; B: 5 Nm

Displays / operating elements

Display	switching status	4 LED, yellow
---------	------------------	---------------

Accessories

Items supplied	lock nuts: 2
----------------	--------------

Remarks

Pack quantity	1 pcs.
---------------	--------

IES256



Inductive sensor


IEB3003BBPKG/K1/V4A/US-104

Electrical connection - plug

Connector: 1 x M12; coding: A



Connection

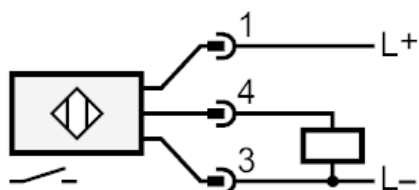

Diagrams and graphs

Installation

