


SB2234



Flow meter with integrated backflow prevention and display

SBG34KL0FRKG

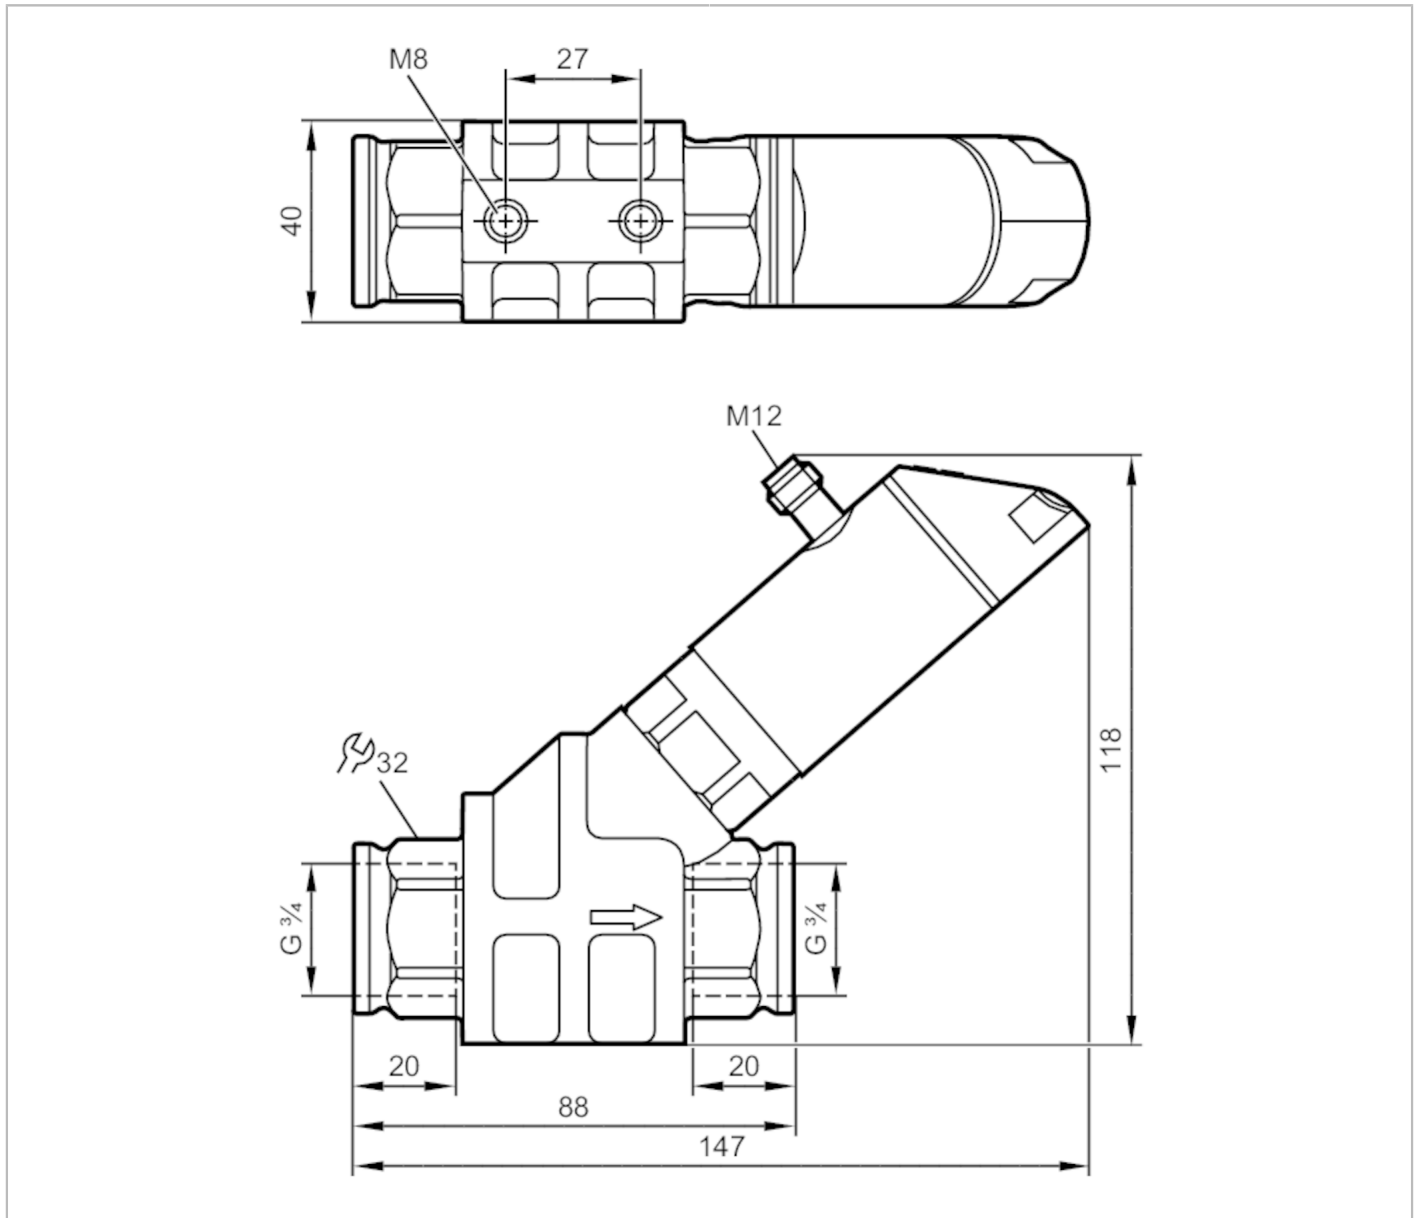

Product characteristics				
Measuring range	1...50 l/min	0.06...3 m ³ /h	16...793 gph	0.26...13.2 gpm
Process connection	threaded connection G 3/4 internal thread			
Application				
Special feature	Gold-plated contacts			
Media	Liquids; oils (viscosity 46 mm ² /s at 40 °C)			
Medium temperature [°C]	-10...100			
Pressure rating	100 bar	10 MPa		
Note on pressure rating	at medium temperature >70°C: 80 bar / 8 MPa			
Electrical data				
Operating voltage [V]	18...30 DC; (to SELV/PELV)			
Current consumption [mA]	< 50			



Flow meter with integrated backflow prevention and display

SBG34KL0FRKG

Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 3

Outputs

Total number of outputs	2
Output signal	switching signal; analogue signal; frequency signal; IO-Link
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC [V]	2
Max. current load per output [mA]	150; (200: ...60 °C; Ambient temperature; 250: ...40 °C; Ambient temperature)
Analogue current output [mA]	4...20
Max. load [Ω]	500
Short-circuit protection	yes
Overload protection	yes
Frequency of the output [Hz]	0...10000

Measuring/setting range

Measuring range	1...50 l/min	0.06...3 m³/h	16...793 gph	0.26...13.2 gpm
Display range	0...60 l/min	0...3.6 m³/h	0...951 gph	0...15.86 gpm
Resolution	0.01 l/min	0.001 m³/h	1 gph	0.01 gpm
Set point SP	0.35...50 l/min	0.02...3 m³/h	5...793 gph	0.08...13.2 gpm
Reset point rP	0...49.65 l/min	0...2.98 m³/h	0...787 gph	0...13.12 gpm
Frequency end point, FEP	3.35...50 l/min	0.2...3 m³/h	53...793 gph	0.88...13.2 gpm
In steps of	0.05 l/min	0.005 m³/h	1 gph	0.02 gpm
Frequency at the end point FRP [Hz]	10...10000			
In steps of [Hz]	10			
Measuring dynamics	1:50			

Temperature monitoring

Measuring range	-10...100 °C	14...212 °F
Display range	-32...122 °C	-25.6...251.6 °F
Resolution	0.1 °C	0.1 °F
Set point SP	-9.3...100 °C	15.2...212 °F
Reset point rP	-10...99.3 °C	14...210.8 °F
In steps of	0.1 °C	0.2 °F
Frequency start point, FSP	-10...78 °C	14...172.4 °F
Frequency end point, FEP	12...100 °C	53.6...212 °F
Frequency at the end point FRP [Hz]	10...10000	
In steps of [Hz]	10	

Accuracy / deviations

Flow monitoring

Accuracy (in the measuring range)	± 5 % MEW; (Q > 1 l/min; 20...70 °C Medium temperature)
Repeatability	± 1 % MEW

Temperature monitoring

Temperature drift	0,029 °C / K
-------------------	--------------



Flow meter with integrated backflow prevention and display

SBG34KL0FRKG

Accuracy	[K]	3 K (25°C; Q > 1 l/min)	
Response times			
Flow monitoring			
Response time	[s]	0.01	
Damping process value dAP	[s]	0...5	
In steps of	[s]	0.1	
Damping for the analogue output dAA	[s]	0...5	
In steps of	[s]	0.1	
Temperature monitoring			
Dynamic response T05 / T09	[s]	T09 = 120 (Q > 1 l/min)	
Software / programming			
Parameter setting options	hysteresis / window; normally open / normally closed; switching logic; current/frequency output; damping for the switching output / analogue output; display can be rotated and switched off; standard unit of measurement; process value colour; calibration factor		
Interfaces			
Communication interface	IO-Link		
Transmission type	COM2 (38,4 kBaud)		
IO-Link revision	1.1		
SDCI standard	IEC 61131-9 CDV		
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor	
	Function	Device identification	
	Function	Process data variable	
	Function	Device diagnosis	
SIO mode	yes		
Required master port type	A		
Process data analogue	2		
Process data binary	2		
Min. process cycle time	[ms]	3.2	
Supported DeviceIDs	Type of operation	DeviceID	
	default	1045	
Operating conditions			
Ambient temperature	[°C]	0...60	
Note on ambient temperature	medium temperature < 80 °C medium temperature < 100 °C: 0...40 °C		
Storage temperature	[°C]	-15...80	
Protection	IP 65; IP 67		
Tests / approvals			
EMC	DIN EN 61000-6-2		
	DIN EN 61000-6-3		
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)	
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)	
MTTF	[years]	145	
UL approval	UL approval no.	I005	
	File number UL	E174189	

SB2234



Flow meter with integrated backflow prevention and display

SBG34KL0FRKG

Pressure Equipment Directive	Sound engineering practice
------------------------------	----------------------------

Mechanical data

Weight [g]	991.5
Materials	stainless steel (316L/1.4404); PBT+PC-GF30; PBT-GF20; PC; brass chemically nickel-plated
Materials (wetted parts)	stainless steel (316 / 1.4401); stainless steel (316L/1.4404); brass (2.0371); brass chemically nickel-plated; PPS; O-ring: FKM
Process connection	threaded connection G 3/4 internal thread
Switching cycles mechanical	10 million

Displays / operating elements

Display	Display unit	6 x LED, green
	switching status	2 x LED, yellow
	measured values	alphanumeric display, red/green alternating indication 4-digit
	programming	alphanumeric display, 4-digit

Remarks

Remarks	Recommendation: use a 200-micron filter. All data refer to oil with the following nominal viscosity: 46 mm ² /s, 40 °C MW = measured value MEW = Final value of the measuring range
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated





Flow meter with integrated backflow prevention and display

SBG34KL0FRKG

Connection



OUT1:

- switching output volumetric flow quantity monitoring
- switching output Temperature monitoring
- frequency output volumetric flow quantity monitoring
- frequency output Temperature monitoring
- IO-Link

OUT2:

- switching output volumetric flow quantity monitoring
 - switching output Temperature monitoring
 - analogue output volumetric flow quantity monitoring
 - analogue output Temperature monitoring
- colours to DIN EN 60947-5-2

Core colours :

- BK = black
- BN = brown
- BU = blue
- WH = white

Diagrams and graphs

