

contactor, DC-3/DC-5, 220 A, 2-pole, 100 V AC, 50 Hz / 120 V AC, 60 Hz, auxiliary contacts: 2 NO + 2 NC, connecting bar, frame size 8

<b>product designation</b>	Contactor
<b>product type designation</b>	3TC
<b>General technical data</b>	
<b>size of contactor</b>	8
<b>product extension</b>	
• function module for communication	No
• auxiliary switch	Yes
<b>insulation voltage rated value</b>	1 000 V
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	660 V
<b>shock resistance at rectangular impulse</b>	
• at AC	12 g / 5 ms, 5,5 g / 10 ms
<b>mechanical service life (operating cycles)</b>	
• of contactor typical	10 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
<b>reference code according to IEC 81346-2</b>	Q
<b>Substance Prohibition (Date)</b>	03/01/2017
<b>SVHC substance name</b>	Lead CAS-No. 7439-92-1
<b>Net Weight</b>	6.984 kg
<b>Ambient conditions</b>	
<b>ambient temperature</b>	
• during operation	-25 ... +55 °C
• during storage	-50 ... +80 °C
<b>relative humidity minimum</b>	10 %
<b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>	95 %
<b>Main circuit</b>	
<b>number of poles</b>	2
<b>number of poles for main current circuit</b>	2
<b>number of NO contacts for main contacts</b>	2
<b>number of NC contacts for main contacts</b>	0
<b>type of voltage</b>	DC
<b>operational current</b>	
• at 1 current path at DC-1	
— at 24 V rated value	220 A
— at 110 V rated value	220 A
— at 220 V rated value	220 A
• with 2 current paths in series at DC-1	
— at 24 V rated value	220 A

— at 110 V rated value	220 A
— at 220 V rated value	220 A
— at 440 V rated value	220 A
— at 600 V rated value	220 A
— at 750 V rated value	220 A
● <b>at DC-3 at DC-5</b>	
— at 220 V rated value	220 A
— at 600 V rated value	220 A
— at 750 V rated value	170 A
● <b>at 1 current path at DC-3 at DC-5</b>	
— at 24 V rated value	220 A
— at 110 V rated value	220 A
— at 220 V rated value	220 A
● <b>with 2 current paths in series at DC-3 at DC-5</b>	
— at 24 V rated value	220 A
— at 110 V rated value	220 A
— at 220 V rated value	220 A
— at 440 V rated value	220 A
— at 600 V rated value	220 A
— at 750 V rated value	170 A
<b>operating power</b>	
● <b>at DC-1</b>	
— at 110 V rated value	24 kW
— at 220 V rated value	48 kW
— at 440 V rated value	97 kW
— at 750 V rated value	165 kW
● <b>at DC-3 at DC-5</b>	
— at 110 V rated value	20 kW
— at 220 V rated value	41 kW
— at 440 V rated value	82 kW
— at 600 V rated value	110 kW
— at 750 V rated value	110 kW
<b>operating frequency</b>	
● <b>at DC-1 maximum</b>	1 000 1/h
● <b>at DC-3 maximum</b>	600 1/h
● <b>at DC-5 maximum</b>	600 1/h
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC
<b>control supply voltage at AC</b>	
● <b>at 50 Hz rated value</b>	100 V
● <b>at 60 Hz rated value</b>	120 V
<b>operating range factor control supply voltage rated value of magnet coil at AC</b>	
● <b>at 60 Hz</b>	0.8 ... 1.1
<b>apparent pick-up power of magnet coil at AC</b>	640 VA
● <b>at 50 Hz</b>	640 VA
● <b>at 60 Hz</b>	730 VA
<b>inductive power factor with closing power of the coil</b>	0.48
● <b>at 50 Hz</b>	0.48
● <b>at 60 Hz</b>	0.38
<b>apparent holding power of magnet coil at AC</b>	46 VA
● <b>at 50 Hz</b>	46 VA
● <b>at 60 Hz</b>	56 VA
<b>inductive power factor with the holding power of the coil</b>	0.23
● <b>at 50 Hz</b>	0.23
● <b>at 60 Hz</b>	0.24
<b>arcing time</b>	20 ... 30 ms
<b>Auxiliary circuit</b>	
<b>number of NC contacts for auxiliary contacts</b>	2

<ul style="list-style-type: none"> <li>instantaneous contact</li> </ul>	2
<b>number of NO contacts for auxiliary contacts</b>	2
<ul style="list-style-type: none"> <li>instantaneous contact</li> </ul>	2
number of CO contacts for auxiliary contacts	0
<b>identification number and letter for switching elements</b>	22
operational current at AC-12 maximum	10 A
<b>operational current at AC-15</b>	
<ul style="list-style-type: none"> <li>at 230 V rated value</li> </ul>	5.6 A
<ul style="list-style-type: none"> <li>at 400 V rated value</li> </ul>	3.6 A
<ul style="list-style-type: none"> <li>at 500 V rated value</li> </ul>	2.5 A
<b>operational current at DC-12</b>	
<ul style="list-style-type: none"> <li>at 24 V rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>at 48 V rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>at 60 V rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>at 110 V rated value</li> </ul>	8 A
<ul style="list-style-type: none"> <li>at 125 V rated value</li> </ul>	6 A
<ul style="list-style-type: none"> <li>at 220 V rated value</li> </ul>	2 A
<ul style="list-style-type: none"> <li>at 600 V rated value</li> </ul>	0.4 A
<b>operational current at DC-13</b>	
<ul style="list-style-type: none"> <li>at 24 V rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>at 48 V rated value</li> </ul>	5 A
<ul style="list-style-type: none"> <li>at 60 V rated value</li> </ul>	5 A
<ul style="list-style-type: none"> <li>at 110 V rated value</li> </ul>	2.4 A
<ul style="list-style-type: none"> <li>at 125 V rated value</li> </ul>	2.1 A
<ul style="list-style-type: none"> <li>at 220 V rated value</li> </ul>	1.1 A
<ul style="list-style-type: none"> <li>at 600 V rated value</li> </ul>	0.21 A
<b>UL/CSA ratings</b>	
<b>contact rating of auxiliary contacts according to UL</b>	A600 / P600
<b>Short-circuit protection</b>	
<b>design of the fuse link</b>	
<ul style="list-style-type: none"> <li>for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>with type of coordination 1 required</li> </ul> </li> </ul>	3NE1332-4D (400 A) (750 V, 6 kA)
<ul style="list-style-type: none"> <li>with type of coordination 2 required</li> </ul>	3NE1332-4D (400 A) (750 V, 6 kA)
<ul style="list-style-type: none"> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 16 A (500 V, 1 kA)
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	+/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method side-by-side mounting	Yes
<b>fastening method</b>	screw fixing
<b>height</b>	240 mm
<b>width</b>	135 mm
<b>depth</b>	204 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>forwards</li> </ul> </li> </ul>	20 mm
<ul style="list-style-type: none"> <li>backwards</li> </ul>	0 mm
<ul style="list-style-type: none"> <li>upwards</li> </ul>	10 mm
<ul style="list-style-type: none"> <li>downwards</li> </ul>	10 mm
<ul style="list-style-type: none"> <li>at the side</li> </ul>	10 mm
<ul style="list-style-type: none"> <li>for grounded parts <ul style="list-style-type: none"> <li>forwards</li> </ul> </li> </ul>	70 mm
<ul style="list-style-type: none"> <li>backwards</li> </ul>	0 mm
<ul style="list-style-type: none"> <li>upwards</li> </ul>	10 mm
<ul style="list-style-type: none"> <li>at the side</li> </ul>	10 mm
<ul style="list-style-type: none"> <li>downwards</li> </ul>	10 mm
<ul style="list-style-type: none"> <li>for live parts <ul style="list-style-type: none"> <li>forwards</li> </ul> </li> </ul>	70 mm
<ul style="list-style-type: none"> <li>backwards</li> </ul>	0 mm
<ul style="list-style-type: none"> <li>upwards</li> </ul>	10 mm

— downwards	10 mm
— at the side	10 mm

#### Connections/ Terminals

<b>type of electrical connection</b>	screw terminal
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
<b>type of connectable conductor cross-sections</b>	
• for auxiliary contacts	
— solid or stranded	2x (1 ... 2.5 mm <sup>2</sup> )
— finely stranded with core end processing	2x (0.75 ... 1.5 mm <sup>2</sup> )

#### Safety related data

product function mirror contact according to IEC 60947-4-1	Yes
Electrical Safety	
<b>protection class IP on the front according to IEC 60529</b>	IP00; IP20 with box terminal/cover
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front with cover

#### Approvals Certificates

Environment	General Product Approval	Functional Safety	other
-------------	--------------------------	-------------------	-------

[Environmental Confirmations](#)



[Type Examination Certificate](#)

[Confirmation](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TC5217-0BK1>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TC5217-0BK1>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TC5217-0BK1&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TC5217-0BK1&lang=en)

##### Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TC5217-0BK1>

##### Characteristic curves

[https://curves.simarisiemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simarisiemens.com/curves/<mmp_prod_noCOMP=)

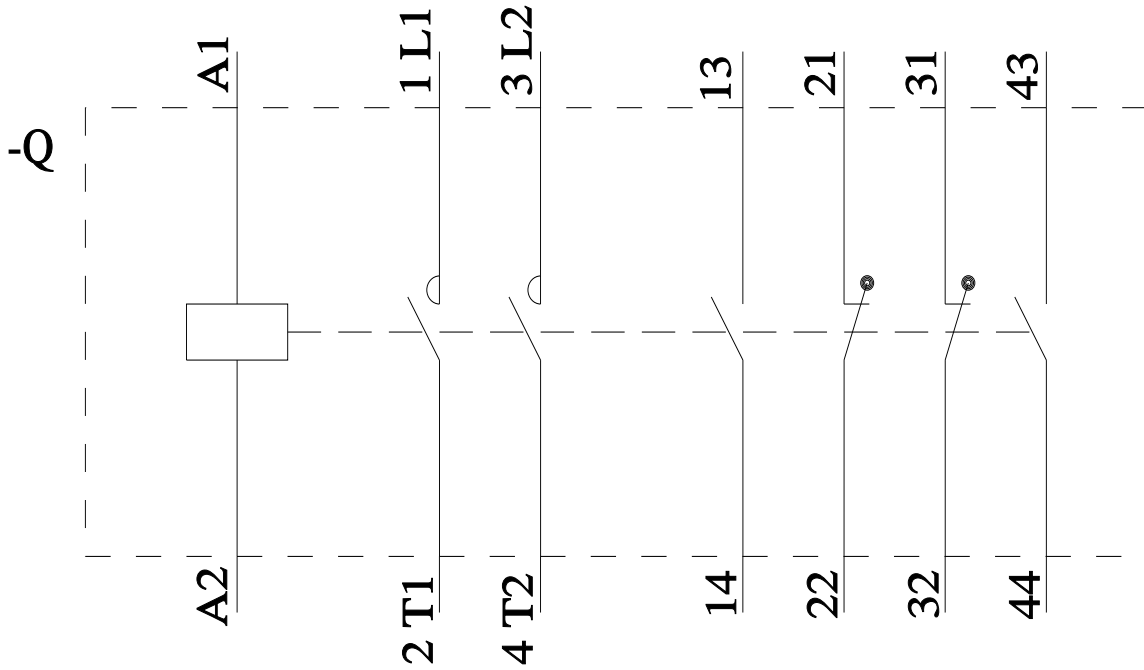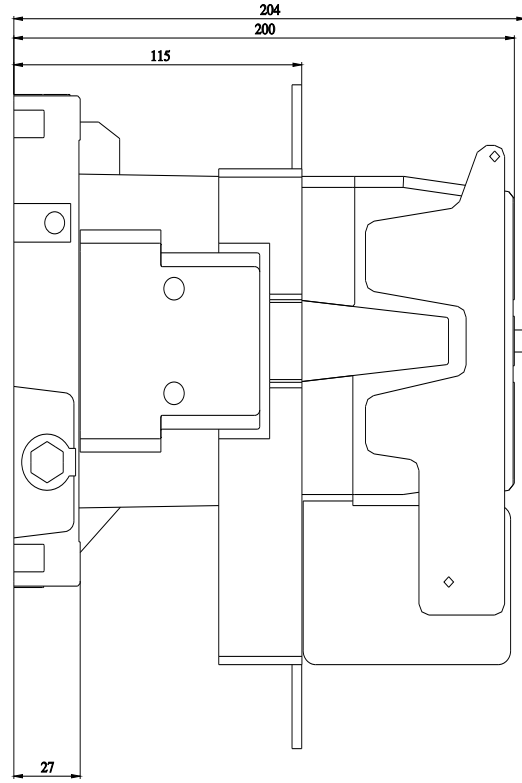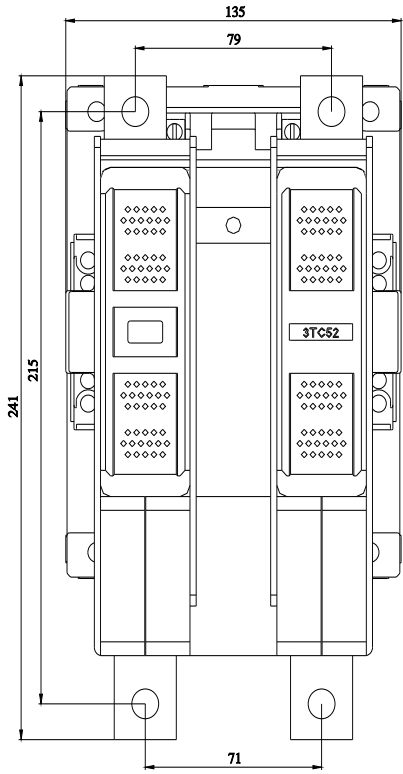

last modified:

4/4/2026

