

Data sheet for SIMOTICS S-1FT2

Article No. : 1FT2208-4AF10-0CB0



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :


Basic motor data	
Motor type	Permanent-magnet synchronous motor, Natural cooling, IP64
Motor type	Compact
Static torque	22.00 Nm
Static current	15.0 A
Maximum torque	66.00 Nm
Maximum current	55.0 A
Maximum speed	5,900 rpm
Rotor moment of inertia	44.4000 kgcm ²
Weight	17.3 kg

Rated data	
SINAMICS S120, BLM/SLM 3AC 400V	
Rated speed	3,000 rpm
Rated torque	11.80 Nm
Rated current	8.5 A
Rated power	3.70 kW

Encoder system	
Encoder system	Encoder AM26DQC: Absolute encoder 26 bit + 12 bit multiturn

Motor connection	
Connection type	Double cable connection for S120
Connector size power connector	M23
Connector size signal connector	M17

Mechanical data	
Design acc. to Code I	IM B5 (IM V1, IM V3)
Vibration severity grade	Grade A
Shaft height	80
Flange size (AB)	155 mm
Centering ring (N)	130 mm
Hole circle (M)	165 mm
Screw-on hole (S)	11.0 mm
Overall length (LB)	256 mm
Diameter of shaft (D)	32 mm
Length of shaft (E)	58 mm
Length of flange diagonal (P)	200 mm
Shaft end	Plain shaft
Color of the housing	Standard (Anthracite, similar to RAL 7016)

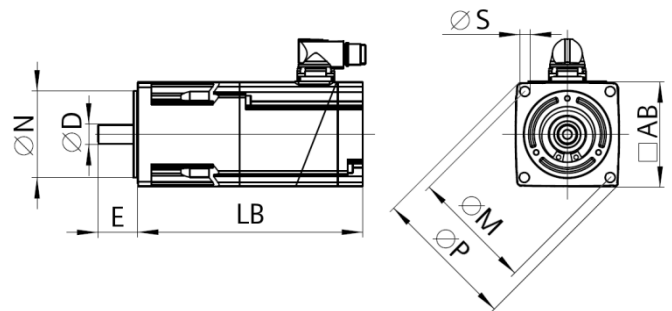

Holding brake	
Holding torque	32.00 Nm
Average dynamic torque	17.00 Nm
Opening time	200 ms
Closing time	60 ms
Maximum single switching energy ¹⁾	4,800 J
Service life, operating energy	2,400,000 J
Rated current ²⁾	0.9 A

¹⁾Up to three consecutive emergency stops and up to 25% of all emergency stops as a W_{max} high energy stop possible.

²⁾Typical value for 20°C ambient temperature. At -15°C the break-induced currents can be increased by up to 30%.