



SIMATIC IPC BX-39A; Intel(R) UHD graphic onboard; 4x USB 3.2; Ethernet (10/100/1000); PCIe (optional) Intel Xeon W-11555MLE (1.9/4.4 GHz, 6C/12T); vertical mounting; 16 GB; RAID1 2x SSD 512 GB Eco (only if 2nd MS SSD 512 GB Eco) M.2 SSD 512 GB Eco Windows 11 IoT Enterprise 2024 LTSC for Celeron Xeon W-11 155MLE, Xeon W-11555MLE; without option 1; USB restore stick with D&D and software image (if selected) 24 V DC industrial power supply (NAU, isolated, bridging time);

General information	
Product type designation	BX-39A
Installation type/mounting	
Mounting	standard rail
Design	Box PC, built-in unit
Supply voltage	
Type of supply voltage	24 V DC
Rated value (DC)	24 V
Mains buffering	
<ul style="list-style-type: none"> <li>Mains/voltage failure stored energy time</li> </ul>	20 ms
Processor	
Chipset	Intel® RM590E
Drives	
Hard disk	M.2 SSD 256 GB Eco
SSD	Yes
Memory	
Type of memory	DDR4-3200 SO-DIMM
Capacity of main memory, max.	32 Gbyte
Data areas and their retentivity	
Retentive data area (incl. timers, counters, flags), max.	512 kbyte; 128 KB can be stored in the buffer time; optional
Hardware configuration	
Slots	
<ul style="list-style-type: none"> <li>free slots</li> <li>Number of PCI slots</li> <li>Number of compact flash slots</li> </ul>	2x PCIe; optional: 1x PCIe (x4); 2x PCIe (x1, x4), with card retainer 0 0
Interfaces	
Number of industrial Ethernet interfaces	4; 4x Gigabit Ethernet (IE/PN)
USB port	4x USB 3.2 Gen2
Connection for keyboard/mouse	USB / USB
Video interfaces	
<ul style="list-style-type: none"> <li>Graphics interface</li> </ul>	2x DisplayPort (DP1.4-capable): maximum 4096 × 2304 / 60 Hz / 36 bit
Industrial Ethernet	
<ul style="list-style-type: none"> <li>Industrial Ethernet interface               <ul style="list-style-type: none"> <li>— 100 Mbps</li> <li>— 1000 Mbps</li> </ul> </li> </ul>	4x Ethernet (RJ45) Yes Yes
Interrupts/diagnostics/status information	
LED status display	1x power, 3x user
Bus diagnostics	Yes
Integrated Functions	
Monitoring functions	
<ul style="list-style-type: none"> <li>Temperature monitoring</li> <li>Watchdog</li> <li>Fan</li> <li>Monitoring function via network</li> </ul>	Yes Yes No Optional
EMC	

<b>Interference immunity against discharge of static electricity</b>	
<ul style="list-style-type: none"> <li>Interference immunity against discharge of static electricity</li> </ul>	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Interference immunity against high-frequency electromagnetic fields</b>	
<ul style="list-style-type: none"> <li>Interference immunity against high frequency radiation</li> </ul>	10 V/m for 80 ... 2 700 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2.7 to 6 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6
<b>Interference immunity to cable-borne interference</b>	
<ul style="list-style-type: none"> <li>Interference immunity on supply cables</li> <li>Interference immunity on signal cables &gt;30m</li> <li>Interference immunity on signal cables &lt; 30m</li> </ul>	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric ±2 kV acc. to IEC 61000-4-4, burst; ±2 kV acc. to IEC 61000-4-5, surge ±1 kV acc. to IEC 61000-4-4, Burst
<b>Interference immunity against voltage surge</b>	
<ul style="list-style-type: none"> <li>asymmetric interference</li> <li>symmetric interference</li> </ul>	±2 kV acc. to IEC 61000-4-5, surge asymmetric ±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interference immunity to magnetic fields</b>	
<ul style="list-style-type: none"> <li>Interference immunity to magnetic fields at 50 Hz</li> </ul>	100 A/m; to IEC 61000-4-8
<b>Emission of conducted and non-conducted interference</b>	
<ul style="list-style-type: none"> <li>Interference emission via line/AC current cables</li> </ul>	IEC 61000-6-3, IEC 61000-6-4, CAN/CSA CISPR 32 Class B, FCC Class A
<b>Degree and class of protection</b>	
IP degree of protection	IP20
<b>Standards, approvals, certificates</b>	
Siemens Eco Profile (SEP)	Siemens EcoTech
CE mark	Yes
UKCA mark	Yes
CSA approval	Yes
UL approval	Yes; UL 61010-2-201 Second Edition, File E85972
<ul style="list-style-type: none"> <li>UL 508</li> </ul>	No
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
FCC	Yes
BSMI	No; in preparation
BIS	Yes
EMC	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, CAN/CSA CISPR 32 Class B, EN 55032 Class B, FCC Class A, KN32
<b>Ecological footprint</b>	
<ul style="list-style-type: none"> <li>environmental product declaration</li> </ul>	Yes
<b>Global warming potential</b>	
— global warming potential, (total) [CO2 eq]	619 kg
— global warming potential, (during production) [CO2 eq]	68.8 kg
— global warming potential, (during operation) [CO2 eq]	566 kg
— global warming potential, (after end of life cycle) [CO2 eq]	-15.8 kg
<b>Marine approval</b>	
<ul style="list-style-type: none"> <li>Germanischer Lloyd (GL)</li> <li>American Bureau of Shipping (ABS)</li> <li>Bureau Veritas (BV)</li> <li>Det Norske Veritas (DNV)</li> <li>Korean Register of Shipping (KRS)</li> <li>Lloyds Register of Shipping (LRS)</li> <li>Nippon Kaiji Kyokai (Class NK)</li> </ul>	Yes Yes Yes Yes Yes Yes Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
<ul style="list-style-type: none"> <li>min.</li> <li>max.</li> </ul>	0 °C 55 °C
<b>Ambient temperature during storage/transportation</b>	
<ul style="list-style-type: none"> <li>min.</li> </ul>	-40 °C

• max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	3 000 m
Relative humidity	
• Relative humidity	tested according to IEC 60068-2-78, IEC 60068-2-30: operation: temperature 30 °C, relative humidity 85%; permissible range: 0 to 31 °C: 5 - 80%; decreasing linearly to 5 - 25% at 55 °C; storage: temperature 25 °C - 55 °C, relative humidity 95%
• Operation, max.	85 %
Vibrations	
• Vibration resistance during operation acc. to IEC 60068-2-6	tested according to IEC 60068-2-6; 5 Hz to 9 Hz: 3.5 mm; 9 Hz to 500 Hz: 9.8 m/s <sup>2</sup>
Shock testing	
• Shock load during operation	Tested according to IEC 60068-2-27: 150 m/s <sup>2</sup> , 11 ms

<b>Operating systems</b>	
without operating system	Yes
pre-installed operating system	
• Windows 7	No
• Windows 10 Enterprise	Yes; Windows 10 IoT Enterprise 2021 LTSC
• Windows 11	Yes

<b>Software</b>	
SIMATIC Software	Optional package with SIMATIC WinCC

<b>Mechanics/material</b>	
Enclosure material (front)	Continuous-cast aluminum

<b>Dimensions</b>	
Width	262 mm
Height	139.7 mm
Depth	62.6 mm

<b>Approvals / Certificates</b>	
<b>General Product Approval</b>	




<b>General Product Approval</b>	<b>For use in hazardous locations</b>
---------------------------------	---------------------------------------



<b>For use in hazardous locations</b>	<b>Maritime application</b>
---------------------------------------	-----------------------------



<b>Maritime application</b>	<b>Dangerous goods</b>	<b>Environment</b>
-----------------------------	------------------------	--------------------

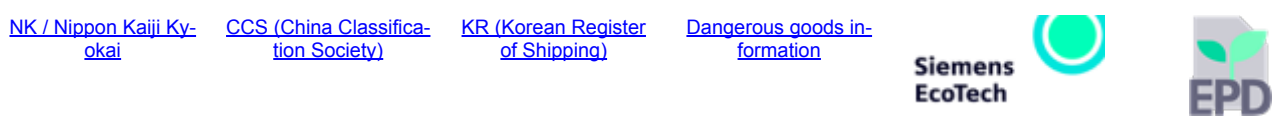

last modified: 11/24/2025