

SWITCH DISCONNECTOR 3VA1 IEC FRAME 160 3-POLE SD100, IN=100A WITHOUT OVERLOAD PROTECTION WITHOUT SHORT CIRCUIT PROT. BUSBAR CONNECTION 3 AUXILIARY SWITCH HQ



| Model                           |                           |
|---------------------------------|---------------------------|
| product brandname               | SENTRON                   |
| Product designation             | Switch disconnecter       |
| Design of the product           | in MCCB design            |
| Number of poles                 | 3                         |
| Design of the auxiliary release | Without auxiliary release |
| Design of the auxiliary switch  | 3 auxiliary switches HQ   |

| General technical data   |        |
|--|--------|
| Tension assignée d'isolement $U_i$   | 800 V  |
| Max. rated operational voltage $U_e$ with AC 50/60Hz   | 690 V  |
| Max. rated operational voltage $U_e$ with DC   | 500 V  |
| Active power loss / for rated value of the current / at AC / in hot operating state / per device | 38 W   |
| Mechanical service life (switching cycles) / typical   | 15 000 |
| Product function   |        |
| • communication function   | No     |
| Net weight   | 990 g  |

### Electricity

|                              |       |
|------------------------------|-------|
| Courant permanent assigné lu | 100 A |
|------------------------------|-------|

### Mechanical Design

|        |         |
|--------|---------|
| Height | 130 mm  |
| Width  | 76.2 mm |
| Depth  | 70 mm   |

### Connections

|   |                   |
|---|-------------------|
| Arrangement of electrical connectors / for main current circuit | Front terminal    |
| Type of electrical connection / for main current circuit        | busbar connection |

### Auxiliary circuit

|  |    |
|--|----|
| Product component                              |    |
| • undervoltage release                         | No |
| • Voltage trigger                              | No |
| • undervoltage release with leading contact    | No |
| • Trip indicator                               | No |
| Number of CO contacts / for auxiliary contacts | 3  |

### Accessories

|  |     |
|--|-----|
| Product extension / optional / motor drive | Yes |
|--|-----|

### Environmental conditions

|                                    |        |
|------------------------------------|--------|
| Protection class IP / on the front | IP40   |
| Ambient temperature                |        |
| • during operation / minimum       | -25 °C |
| • during operation / maximum       | 70 °C  |
| • during storage / minimum         | -40 °C |
| • during storage / maximum         | 80 °C  |

### Certificates

|  |   |
|--|---|
| Equipment marking / acc. to DIN EN 81346-2 | Q |
|--|---|

| General Product Approval | EMC | Declaration of Conformity | Test Certificates | Shipping Approval |
|--------------------------|-----|---------------------------|-------------------|-------------------|
|--------------------------|-----|---------------------------|-------------------|-------------------|



[sonstig](#)



| Shipping Approval | other |
|-------------------|-------|
|-------------------|-------|



[sonstig](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA1110-1AA32-0AD0>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA1110-1AA32-0AD0/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=3VA1110-1AA32-0AD0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=3VA1110-1AA32-0AD0)


### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://www.siemens.com/specifications>

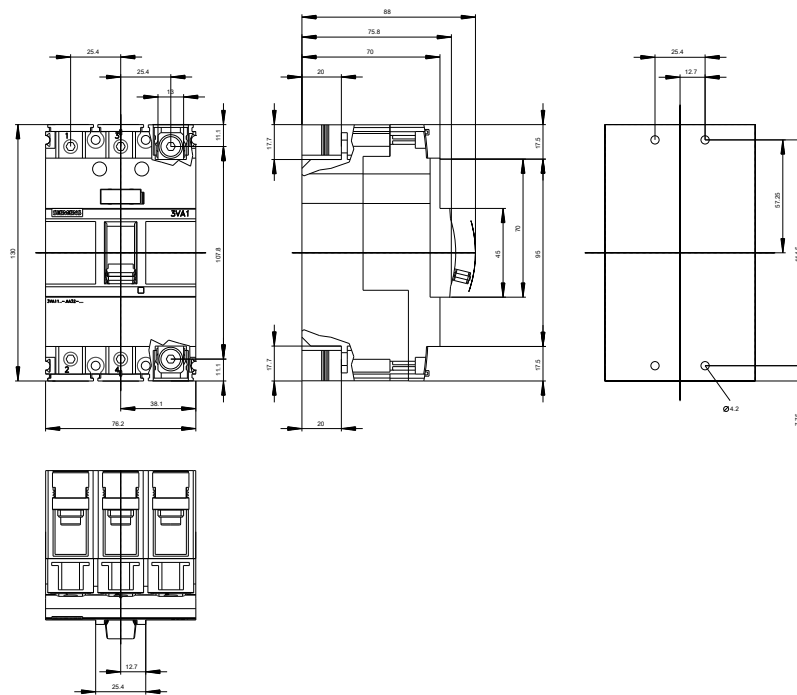

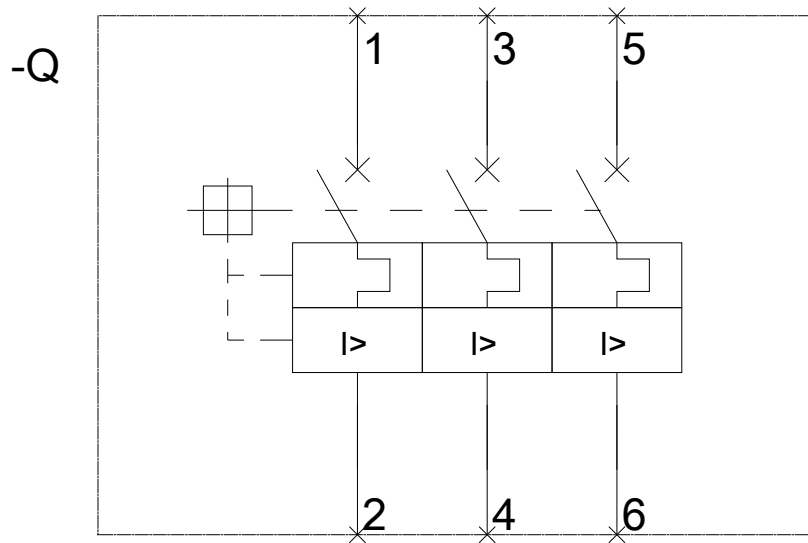

last modified:

10/24/2016