


OI5019



Fibre-optic amplifier

OIF-FPKG

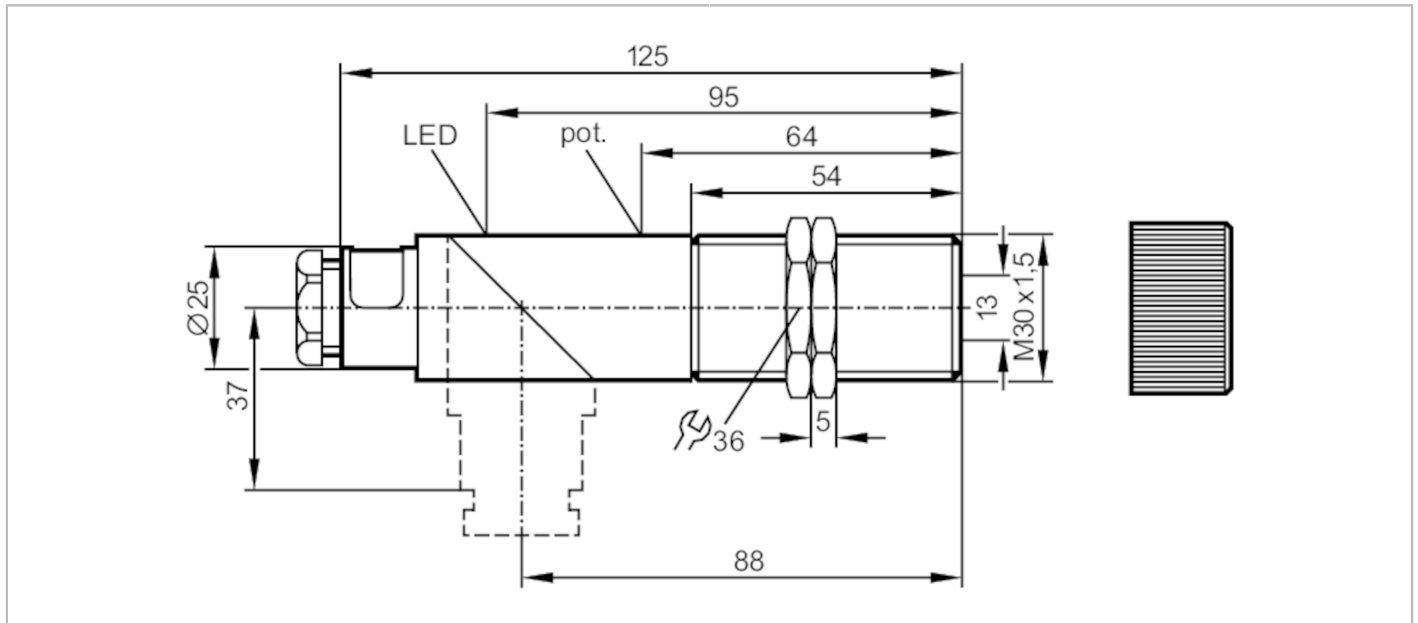

Electrical data		
Operating voltage	[V]	10...55 DC
Current consumption	[mA]	30; ((24 V))
Protection class		II
Reverse polarity protection		yes
Type of light		infrared light
Wave length	[nm]	880
Outputs		
Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	100
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Range	[m]	< 0.3
Range	[mm]	< 70
Range adjustable		yes
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 65

OI5019



Fibre-optic amplifier


OIF-FPKG

Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	659
Mechanical data		
Weight	[g]	125.5
Housing		threaded type
Dimensions	[mm]	M30 x 1.5 / L = 125
Thread designation		M30 x 1.5
Materials		PBT; PPO modified
Lens material		PMMA
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)		lock nuts: 2 x screwdrivers
Remarks		
Remarks		light-on mode corresponds to the NC output function for through-beam fibre optics corresponds to the NO output function for diffuse-reflection fibre optics dark-on mode corresponds to the NO output function for through-beam fibre optics corresponds to the NC output function for diffuse-reflection fibre optics
Pack quantity		1 pcs.

Electrical connection

terminals: ...1.5 mm²; Cable sheath: Ø 7...13 mm; Cable gland: M20 X 1.5

Connection

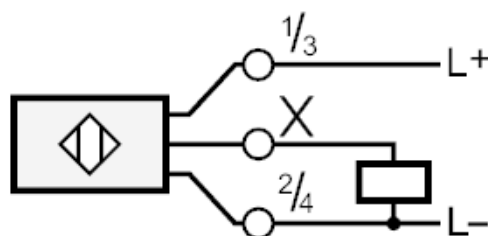




Fibre-optic amplifier

OIF-FPKG

Diagrams and graphs

excess gain graph

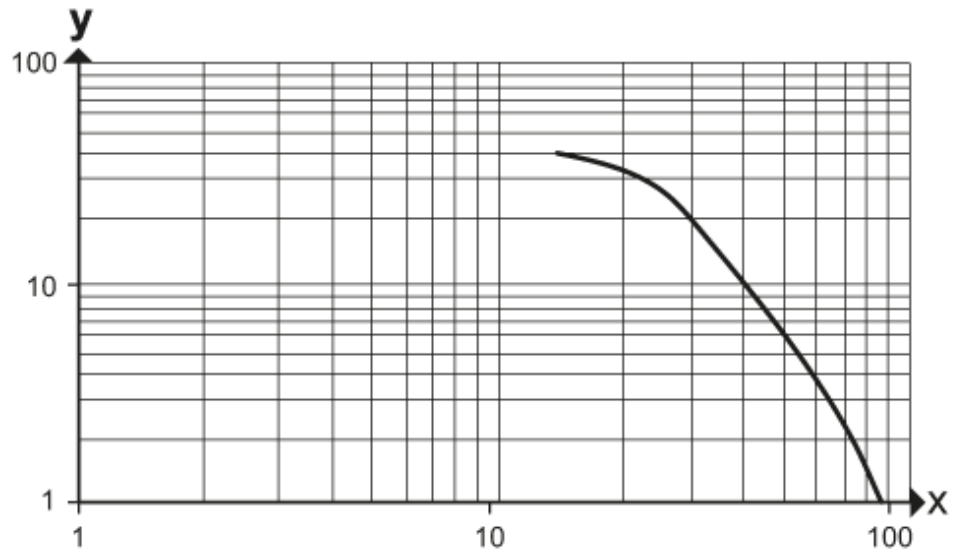

x: Abstand [mm]

y: Funktionsreservfaktor