


# AC2454



## AS-Interface CompactLine module

CompactM12 4 DI-Y 4 DO V4A

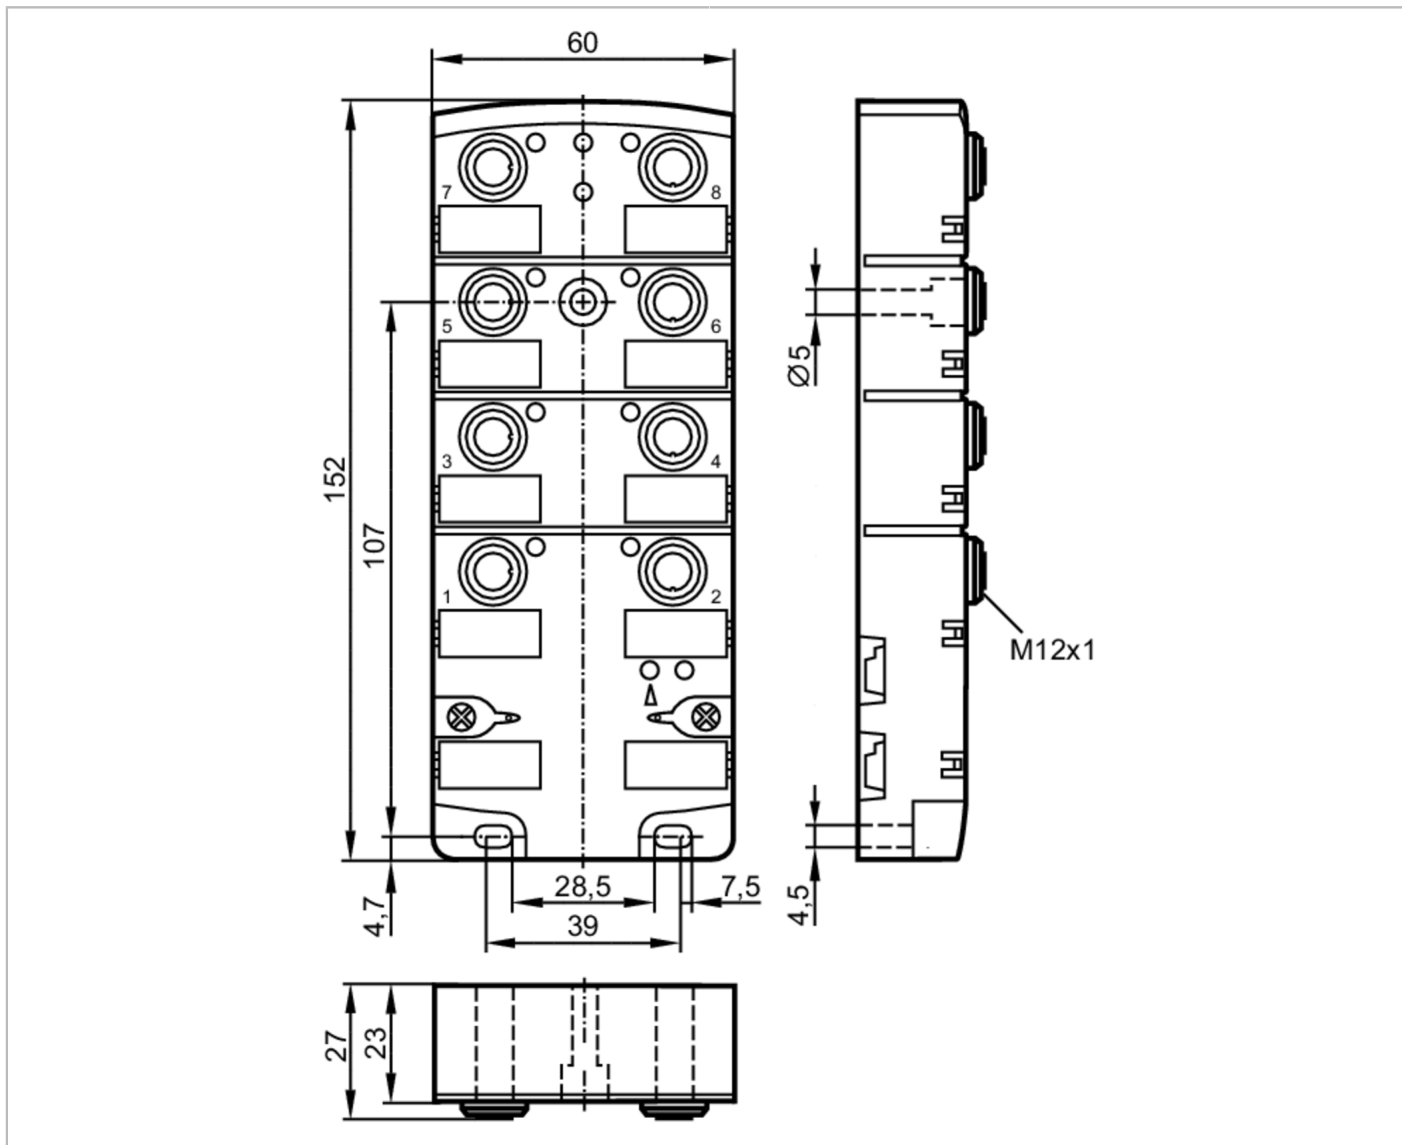

Application	
Application	only for operation with AS-i masters with the profile M4
Electrical data	
Operating voltage [V]	26.5...31.6 DC; ("supply class 2" to cULus)
Max. current consumption from AS-i [mA]	250
Max. current load total [A]	4
Additional voltage supply [V]	10...30 DC; (AUX)
Integrated watchdog	yes
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4



## AS-Interface CompactLine module

CompactM12 4 DI-Y 4 DO V4A

Inputs					
Number of digital inputs	4; (bidirectional)				
Input circuit of digital inputs	PNP				
voltage supply [V]	20...30				
Max. total current rating of inputs [mA]	200				
Input current limitation [mA]	15				
Input current High [mA]	6...10				
Input current Low [mA]	0...2				
Min. switching level high signal [V]	11				
Digital inputs protected against short circuits	yes				
Sensor supply of the inputs	AS-i				
Outputs					
Number of digital outputs	4				
Beschaltung	PNP				
Voltage range DC	10...30; (to PELV)				
Max. current load per output [mA]	2000; (utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))				
Short-circuit proof	yes				
Electrically separated	yes				
Operating conditions					
Ambient temperature [°C]	-25...80				
Protection	IP 67; (when flat cables are used E7400x / E7401x)				
Tests / approvals					
EMC	EN 50295				
AS-i classification					
AS-i version	3.0				
AS-i addressing	IR addressing possible				
Extended addressing mode possible	yes				
AS-i profile	S-7.A.7				
AS-i I/O configuration [hex]	7				
AS-i ID code [hex]	A.7				
AS-i certificate	126801				
Assignment of the data bits	data bit	D0	D1	D2	D3
	input	1	2	3	4
	socket	I-1/2	I-1/2 / I-2	I-3/4	I-3/4 / I-4
	pin	4	2 4	4	2 4
	Output	1	2	3	4
	socket	O-1	O-2	O-3	O-4
	pin	4	4	4	4

# AC2454




## AS-Interface CompactLine module

CompactM12 4 DI-Y 4 DO V4A

Mechanical data		
Weight [g]	371.4	
Type of mounting	AS-i flat cables directly connectable	
Materials	PA 6.6; socket: stainless steel (1.4404 / 316L); threaded inserts in the lower part: stainless steel (1.4404 / 316L); O-ring: EPDM; piercing contacts: CuSn6 nickel-plated and tin-plated; screws stainless steel (1.4578 / 316Cu);	
Displays / operating elements		
Display	operation	LED, green
	errors	LED, red
	function	LED, yellow
Accessories		
Accessories (supplied)	stainless steel sleeve for installation in case of high mechanical stress , E70402	
Remarks		
Pack quantity	1 pcs.	

Electrical connection - Outputs	
	Outputs
3	external voltage AUX -
4	switching output
5	functional earth (FE)
1, 2	not used

Connector: 4 x M12






## AS-Interface CompactLine module

CompactM12 4 DI-Y 4 DO V4A

### Connection

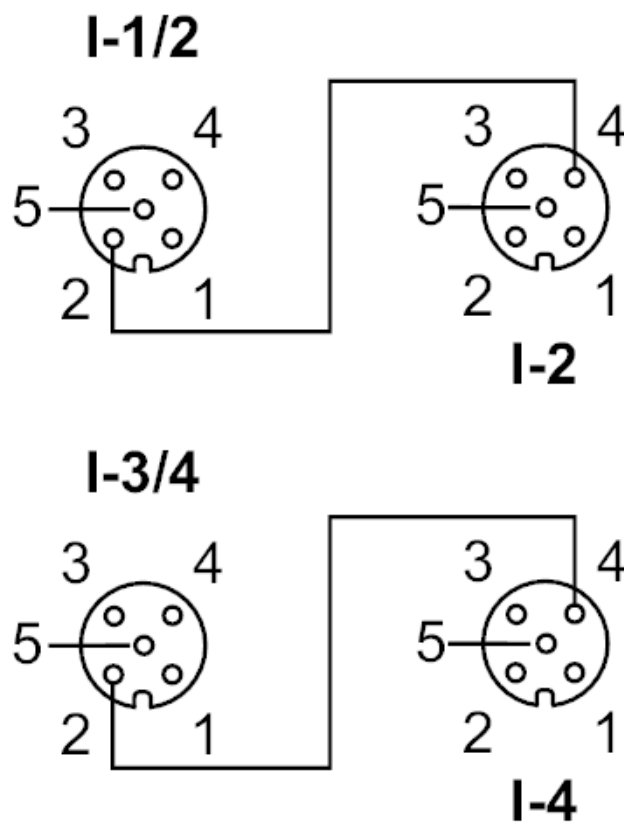

### Electrical connection - Inputs

#### Connection

Inputs	
1	Sensor supply +
2	data input
3	Sensor supply -
4	data input
5	functional earth (FE)

Connector: 4 x M12