


TM4941



Temperature sensor with process connection

TM-150KFEC02- /US/

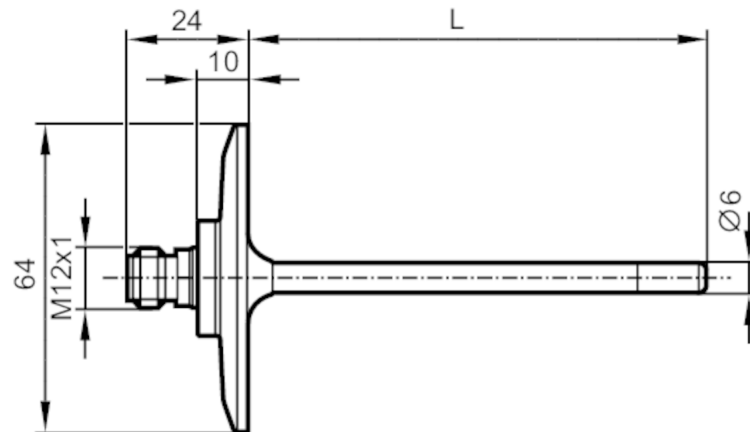

L = probe length corresponds to installation length EL



EC 1935/2004 EHEDG Certified



Application

Measuring element	1 x Pt 100; (to DIN EN 60751, class A)	
Application	hygienic systems	
Media	liquids and gases	
Pressure rating [bar]	25	
Minimum installation depth [mm]	15	

Electrical data

Protection class	III
------------------	-----

Measuring/setting range

Probe length L [mm]	150
Measuring range	-40...150 °C -40...302 °F

Accuracy / deviations

Accuracy [K]	$\pm (0,15 K + 0,002 \times t)$
--------------	-----------------------------------

Response times

Dynamic response T05 / T09 [s]	1 / 3; (to DIN EN 60751)
--------------------------------	--------------------------

Operating conditions

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 68; IP 69K

Tests / approvals

Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	10 g (10...2000 Hz)
MTTF [years]	22831	

TM4941



Temperature sensor with process connection

TM-150KFEC02- /US/

Mechanical data	
Weight [g]	239
Materials	stainless steel (1.4404 / 316L)
Materials (wetted parts)	stainless steel (1.4404 / 316L) electropolished
Process connection	Clamp 2"
Surface characteristics Ra/Rz of the wetted parts	Ra: < 0.8
Probe diameter [mm]	6
Installation length EL [mm]	150

Remarks	
Remarks	operating voltage "supply class 2" according to cULus The values for accuracy apply to flowing water.
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; Contacts: gold-plated



Connection

