



Main

Range of product	Modicon M171/M172
Product or component type	Programmable controllers
Product specific application	HVAC and pumping solution
Variant	Programmable
Total inputs/outputs	27
Discrete input number	8
Discrete output number	3 for relay outputs SPST with same common 2 for relay outputs SPST with same common 2 for relay outputs SPDT with independent common
Discrete output current	8 A for relay SPDT 5 A for relay SPST
Analogue input number	2 analog input NTC 4 configurable
Analogue output number	3 voltage/current, range: 4...20 mA or 0...10 V 2 open collector, range: 1 kHz, 12 V, 35 mA

Complementary

Number of port	1 CAN port - screw terminal block 1 USB type A - USB type A female 1 USB type mini B - USB device port Mini-B 1 RS485 - screw terminal block (Modbus serial link)
Input/Output number	6 analog input(s) 5 analog output(s) 8 digital input(s) 7 digital output(s) 1 high-speed counter(s)
Discrete input logic	Sink or source (positive/negative)
Discrete input voltage	24 V AC/DC 48 V DC
Discrete input current	2.5 mA
Input impedance	20 kOhm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Analogue input type	voltage 0...5 V (ratiometric) current 4...20 mA impedance 0...1500 hOhm impedance 0...300 daOhm NTC temperature probe - 50...110 °C - resolution: 0.1 °C (extended) voltage 0...10 V Pt 1000 temperature probe - 200...800 °C - resolution: 0.1 °C NTC temperature probe - 40...150 °C - resolution: 0.1 °C
Sensor power supply	5 V DC at 50 mA 12 V DC at 150 mA
[Us] rated supply voltage	24 V +/- 20 % AC/DC 48 V +/- 20 % DC
Power consumption in W	18 W at 24...48 V AC/DC
Realtime clock	Built-in clock at -10...55 °C
Display type	LCD display - 128 x 64 pixels
Overvoltage category	II
Local signalling	1 LED (red)programmable: 1 LED (yellow)programmable: 1 LED (green)programmable:
Mounting support	DIN rail
Width	140 mm
Height	110 mm
Depth	61.6 mm
Product weight	0.385 kg

Environment

Directives	86/188/EEC - physical agents (noise) directive 2011/65/EU - RoHS directive 2006/95/EC - low voltage directive 1907/2006/EC - REACH directive
Standards	EN/IEC 60730
Product certifications	CURus CSA EAC CE
Ambient air temperature for operation	-10...55 °C conforming to UL 60730-1
Ambient air temperature for storage	-20...85 °C
Relative humidity	10...90 % non-condensing
IP degree of protection	IP20
Pollution degree	2


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

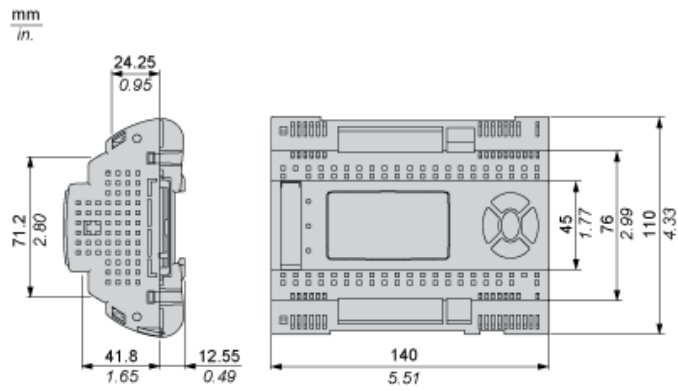


Mounting and Clearance


Clearance

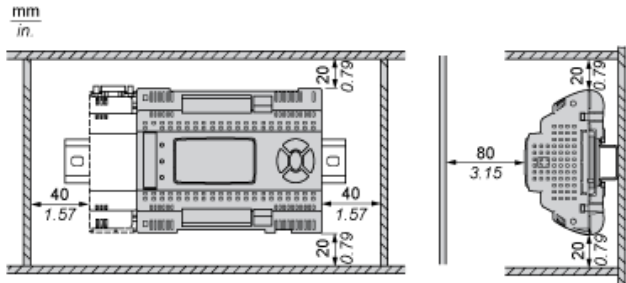


Misplacement




Power Supply

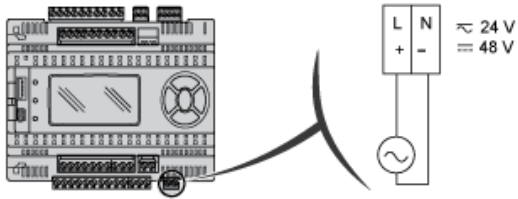

Digital Inputs

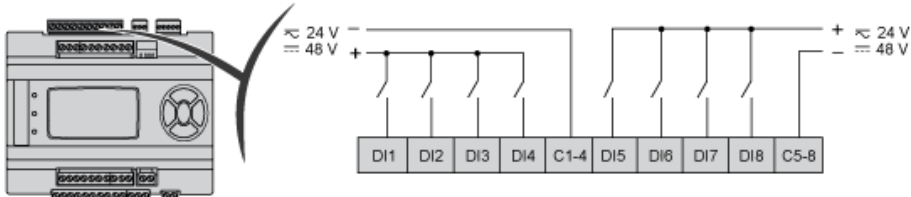


Analog Inputs

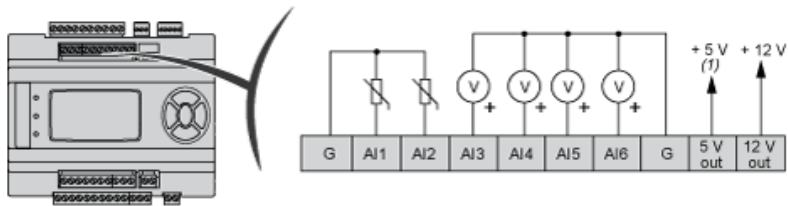


(1) Max current: 50 mA.
G : Ground

Analog Outputs

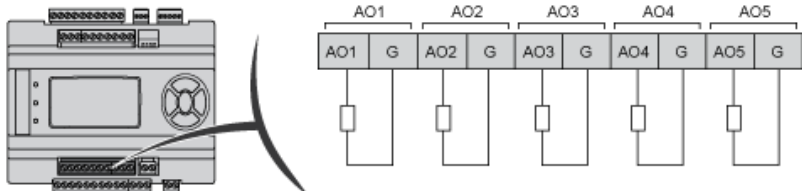

Digital Outputs

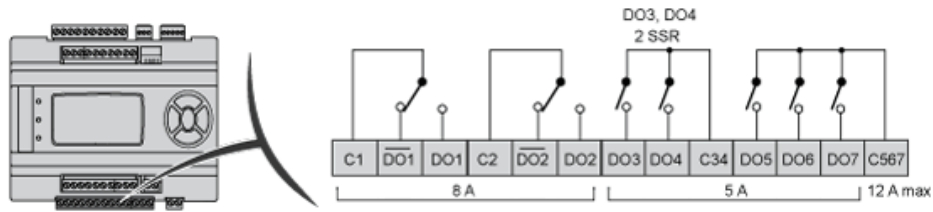


C : common

Fast Digital Input




Serial Line Port (RS 485)

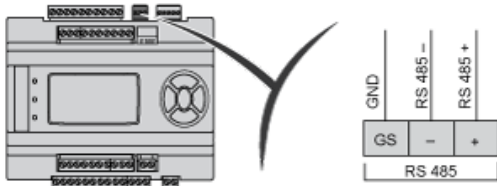


Apply 120 Ohm terminal resistance
GS serial GND isolated from G

CAN Expansion Bus

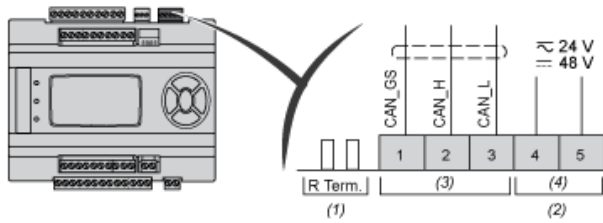


- (1) CAN terminal resistance
- (2) Output for remote keyboard
- (3) CANOPEN
- (4) Power Out

4 DipSwitches

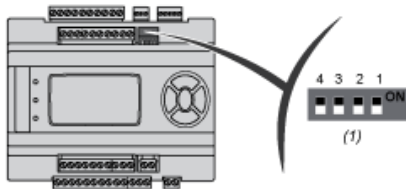

(1) 4 DIP SWITCH
LOW Address

6 - 10 DipSwitches

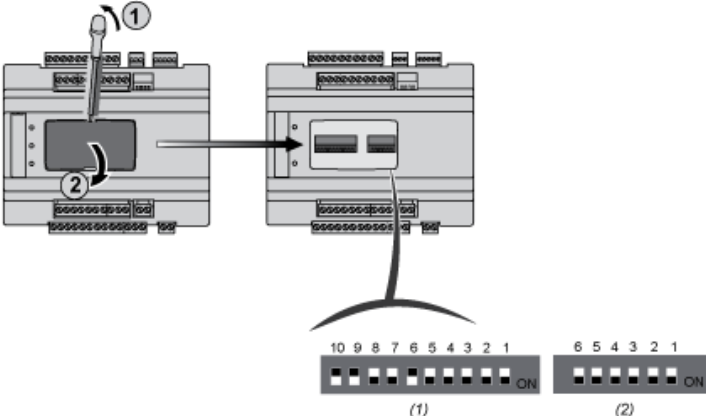

- (1) 10 DIP SWITCH
- (2) 6 DIP SWITCH