



Model Number


V31-WM-3M-PUR-V1-G

Connection cable, M8 to M12, PUR cable, 4-pin

Features

- Immunity to vibration, with mechanical latching
- Knurled nut suitable for tool assembly
- Gold plated contacts
- Resistant to microbes and hydrolysis
- Halogen-free

Dimensions

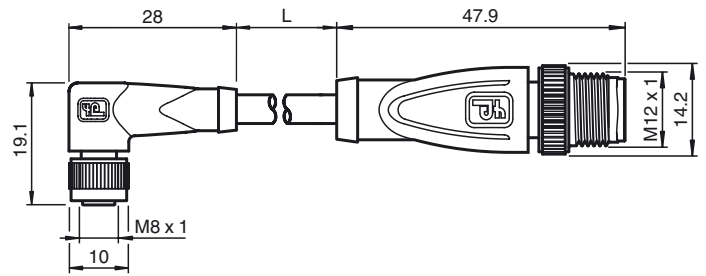

Technical data

General specifications

Number of pins	4
Connection 1	socket
Construction type 1	right angle
Threading 1	M8
Connection 2	Male connector
Construction type 2	straight
Threading 2	M12

Electrical specifications

Operating voltage	U_B	max. 30 V AC/DC
Operating current	I_B	max. 3 A
Contact resistance		< 10 mΩ

Ambient conditions

Ambient temperature	-40 ... 90 °C (-40 ... 194 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F)
Pollution degree	3


Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67
Material	
Contacts	CuSn / Au
Contact surface	Au
Body	TPU, black
Cable	PUR
Slotted nut	Diecast zinc
Sleeve connector	Diecast zinc
Core insulation	PP
Cable	fine-strand, flexible
Sheath diameter	Ø 4.3 mm
Bending radius	> 15 x cable diameter, moving > 8 x cable diameter, fixed
Color	grey
Number of cores	4
Core cross-section	0.25 mm ²
Conductor construction	14 x 0.15 mm Ø
Length	L 60 cm
Flammability	
Contact carrier	94 HB
Housing	94 V-2

Compliance with standards and directives

Standard conformity	
---------------------	--

Electrical connection

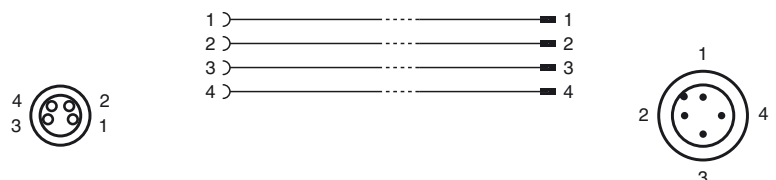

Release date: 2018-08-08 15:14 Date of issue: 2018-08-08 240798-0004_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".



Degree of protection	EN 60529:2000
Standards	IEC 61076-2-104:2008
Halogen-free	IEC 60754-1:1994

Release date: 2018-06-08 15:14 Date of issue: 2018-06-08 240798-0004_eng.xml