


REV. COMB., AC3, 4KW/400V DC48V 3-POLE,  
SZ S00 SPRING-LOADED TERMINAL ELECTR. AND  
MECH. INTERLOCK

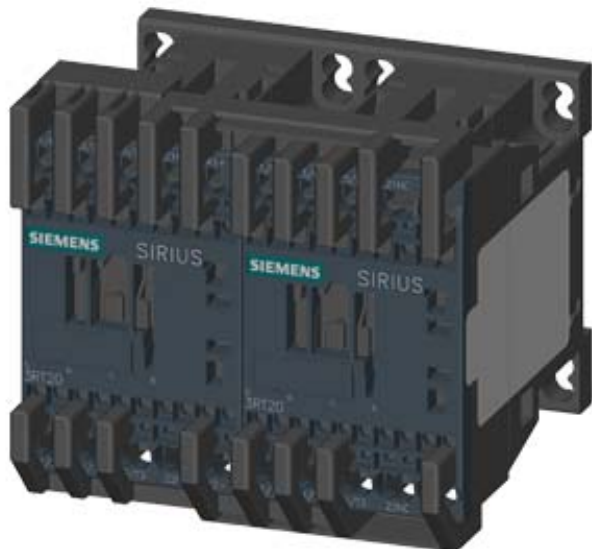

General technical data:

<b>product brand name</b>		SIRIUS
<b>Product designation</b>		reversing contactor assembly 3RA23
<b>Product function</b>		reversing contactor
<b>Size of the contactor</b>		S00
<b>Protection class IP / on the front</b>		IP20
<b>Degree of pollution</b>		3
<b>Insulation voltage / with degree of pollution 3 / rated value</b>	V	690
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Ambient temperature</b>		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operating	°C	-25 ... +60
<b>Resistance against shock</b>		9.8g / 5 ms and 5.9g / 10 ms
<b>Impulse voltage resistance / rated value</b>	kV	6
<b>Active power loss / per conductor / typical</b>	W	0.7
<b>Manufacturer article number</b>		
• 1 / of the contactor included in the scope of supply		<a href="#">3RT2016-2BW42</a>
• 2 / of the contactor included in the scope of supply		<a href="#">3RT2016-2BW42</a>
• of the RS applied assembly kit		<a href="#">3RA2913-2AA2</a>

<b>Mechanical operating cycles as operating time</b>		
• of the main contacts / typical		10,000,000
• of the auxiliary contacts / typical		10,000,000
• of the contactor / typical		10,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000

### Communication:

<b>Product function</b>		
• bus-communication		No
• control circuit interface with IO link		No
<b>Protocol / is supported / AS interface protocol</b>		No

### Main circuit:

<b>Number of poles / for main current circuit</b>		3
<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating voltage / at AC-3 / rated value / maximum</b>	V	690
<b>Operating current</b>		
• at AC-1 / at 400 V		
• at 40 °C ambient temperature / rated value	A	18
• at 60 °C ambient temperature / rated value	A	16
• at AC-2 / at 400 V / rated value	A	7
• at AC-3 / at 400 V / rated value	A	9
• at AC-4 / at 400 V / rated value	A	6.5
• with 1 current path / at DC-1		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	2.1
• with 2 current paths in series / at DC-1		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	12
• with 3 current paths in series / at DC-1		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	20
• with 1 current path / at DC-3 / at DC-5		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	0.15
• with 2 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	0.35
• with 3 current paths in series / at DC-3 / at DC-5		

• at 24 V / rated value	A	20
• at 110 V / rated value	A	20
<b>Service power</b>		
• at AC-2 / at 400 V / rated value	kW	4
• at AC-3		
• at 400 V / rated value	kW	4
• at 500 V / rated value	kW	4.5
• at 690 V / rated value	kW	5.5
• at AC-4 / at 400 V / rated value	kW	2
<b>Off-load operating frequency</b>	1/h	1,500
<b>Frequency of operation</b>		
• with AC-1 / maximum	1/h	1,000
• with AC-2 / maximum	1/h	750
• with AC-3 / maximum	1/h	750
• with AC-4 / maximum	1/h	250

#### Control circuit:

<b>Design of activation</b>		conventional
<b>Voltage type / of control feed voltage</b>		DC
<b>Control supply voltage frequency</b>		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
<b>Control supply voltage / 1</b>		
• for DC / rated value	V	48
<b>Operating range factor control supply voltage rated value / of the magnet coil</b>		
• for DC		0.85 ... 1.1
<b>Pull-in power / of the solenoid / for DC</b>	W	4
<b>Holding power / of the solenoid / for DC</b>	W	4
<b>Resistive loss / of the magnet coil / for DC</b>		
• typical	W	4

#### Auxiliary circuit:

<b>Product extension / auxiliary switch</b>		Yes
<b>Contact reliability / of the auxiliary contacts</b>		< 1 error per 100 million operating cycles
<b>Number of NC contacts / for auxiliary contacts</b>		
• per direction of rotation		0
• instantaneous switching		0
• lagging switching		0
<b>Number of NO contacts / for auxiliary contacts</b>		
• per direction of rotation		0

• instantaneous switching		0
• leading switching		0
<b>Operating current / of the auxiliary contacts</b>		
• at AC-12 / maximum	A	10
• at AC-15		
• at 230 V	A	6
• at 400 V	A	3
• at DC-12		
• at 48 V	A	6
• at 60 V	A	6
• at 110 V	A	3
• at 220 V	A	1
• at DC-13		
• at 24 V	A	10
• at 48 V	A	2
• at 60 V	A	2
• at 110 V	A	1
• at 220 V	A	0.3

#### Short-circuit:

##### Design of the fuse link

- for short-circuit protection of the main circuit
  - with type of assignment 1 / required
- at type of coordination 2 / required
- for short-circuit protection of the auxiliary switch / required

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 35 A  
 gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 20 A  
 fuse gL/gG: 10 A

#### Installation/mounting/dimensions:

<b>mounting position</b>		+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
<b>Mounting type</b>		screw and snap-on mounting onto 35 mm standard mounting rail
<b>Width</b>	mm	90
<b>Height</b>	mm	84
<b>Depth</b>	mm	83
<b>Distance, to be maintained, to the ranks assembly</b>		
• forwards	mm	6
• backwards	mm	0
• upwards	mm	6
• downwards	mm	6

• sideways	mm	6
<b>Distance, to be maintained, to earthed part</b>		
• forwards	mm	6
• backwards	mm	0
• upwards	mm	6
• downwards	mm	6
• sideways	mm	6
<b>Distance, to be maintained, conductive elements</b>		
• forwards	mm	6
• backwards	mm	0
• upwards	mm	6
• downwards	mm	6
• sideways	mm	6

### Connections:

#### Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

spring-loaded terminals

spring-loaded terminals

#### Type of the connectable conductor cross-section

- for main contacts
  - finely stranded
    - with conductor end processing
    - without conductor final cutting
- for AWG conductors / for main contacts
- for auxiliary contacts
  - finely stranded
    - with conductor end processing
    - without conductor final cutting
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 2.5 mm<sup>2</sup>)

2x (0.5 ... 2.5 mm<sup>2</sup>)

1x (20 ... 12)

2x (0.5 ... 1.5 mm<sup>2</sup>)

2x (0.5 ... 1.5 mm<sup>2</sup>)

2x (20 ... 14)

### Certificates/approvals:

#### Verification of suitability

CE / UL / CSA / CCC

General Product Approval	Declaration of Conformity	Test Certificates
--------------------------	---------------------------	-------------------



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

### Shipping Approval



### Shipping Approval

other



[other](#)

[Environmental Confirmations](#)

### UL/CSA ratings

#### yielded mechanical performance [hp]

- for single-phase squirrel cage motors
  - at 110/120 V / rated value
  - at 230 V / rated value
- for three-phase squirrel cage motors
  - at 200/208 V / rated value
  - at 220/230 V / rated value
  - at 460/480 V / rated value
  - at 575/600 V / rated value

hp	0.33
hp	1
hp	2
hp	3
hp	5
hp	7.5

#### Full-load current (FLA) / for 3-phase motor

- at 480 V / rated value
- at 600 V / rated value

A	7.6
A	9

#### Contact rating designation / for auxiliary contacts / according to UL

A600 / Q600

### Safety:

#### B10 value / with high demand rate

- according to SN 31920

1,000,000

#### Failure rate [FIT] / with low demand rate

- according to SN 31920

FIT 100

#### Proportion of dangerous failures

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

% 40  
% 75

#### T1 value / for proof test interval or service life

- according to IEC 61508

a 20

#### Protection against electrical shock

finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA2316-8XB30-2BW4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RA2316-8XB30-2BW4](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2316-8XB30-2BW4)

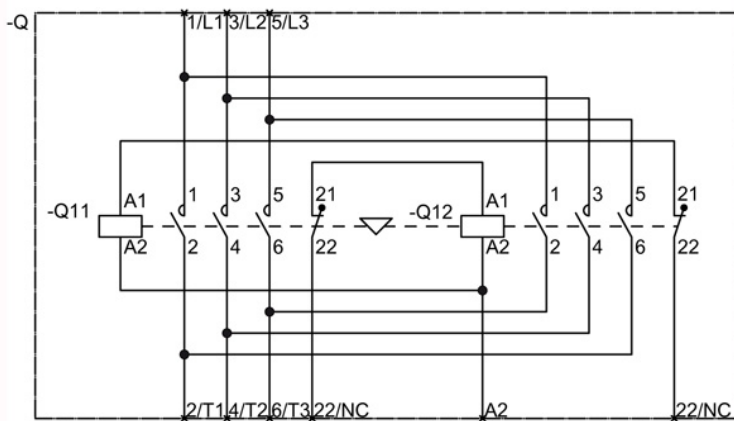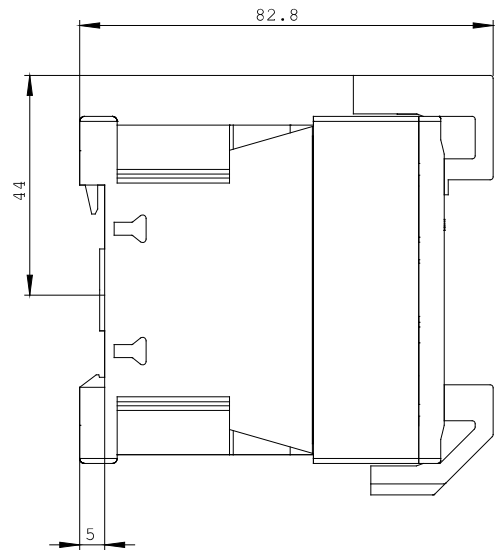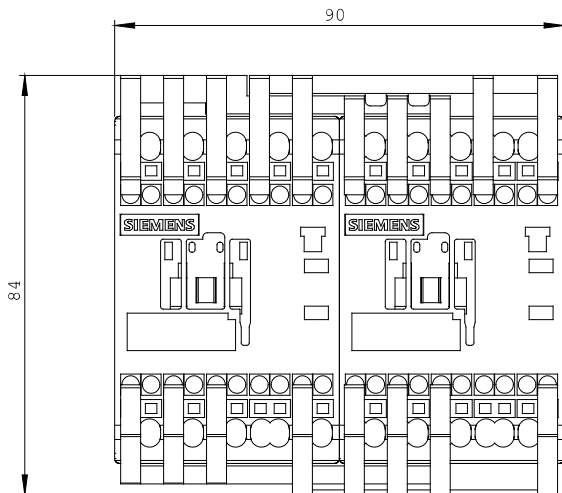

last change:

Aug 4, 2014