



CONTACTOR RELAY, 3NO+1NC, AC 240V,  
50/60 HZ, SIZE S00, SCREW TERMINAL

### General technical data:

product brand name		SIRIUS
Size of the contactor		S00
Identification number and letter for switching elements		31 E
Product extension / auxiliary switch		Yes
Protection class IP / on the front		IP20
Protection against electrical shock		finger-safe
Degree of pollution		3
Insulation voltage / with degree of pollution 3 / rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during storage	°C	-55 ... +80
• during operating	°C	-25 ... +60
Shock resistance		
• at rectangular impulse		
• at AC		7,3g / 5 ms, 4,7g / 10 ms
• at sine pulse		
• at AC		11,4g / 5 ms, 7,3g / 10 ms
Impulse voltage resistance / rated value	kV	6
Mechanical operating cycles as operating time		

- of the contactor / typical
- of the contactor with added auxiliary switch block / typical
- of the contactor with added electronics-compatible auxiliary switch block / typical

30,000,000  
10,000,000  
5,000,000

#### Control circuit/ Control:

##### Voltage type / of control feed voltage

AC

##### Control supply voltage

- at 50 Hz / at AC / rated value
- at 60 Hz / at AC / rated value

V

240

V

240

##### Operating range factor control supply voltage rated value / of the magnet coil

- at 50 Hz / for AC
- at 60 Hz / for AC

0.8 ... 1.1

0.85 ... 1.1

##### Apparent pull-in power / of the solenoid / for AC

V·A

37

##### Apparent holding power / of the solenoid / for AC

V·A

5.7

##### Inductive power factor

- with the pull-in power of the coil
- with the pull-in power of the coil

0.8

0.25

##### Closing delay

- at AC

ms

8 ... 33

##### Opening delay

- at AC

ms

6 ... 25

##### Arcing time

s

10 ... 15

#### Auxiliary circuit:

##### Contact reliability / of the auxiliary contacts

1 faulty switching per 100 million (17 V, 1 mA)

##### Number of NC contacts / for auxiliary contacts / instantaneous switching

1

##### Number of NO contacts / for auxiliary contacts / instantaneous switching

3

##### Operating current

- at AC-12 / maximum
- at AC-15
  - at 230 V / rated value
  - at 400 V / rated value
  - at 500 V / rated value
  - at 690 V / rated value

A

10

A

10

A

3

A

2

A

1

##### Operating current

- with 1 current path / at DC-12
  - at 24 V / rated value
  - at 110 V / rated value

A

10

A

3

• at 220 V / rated value	A	1
• at 440 V / rated value	A	0.3
• at 600 V / rated value	A	0.15
• with 2 current paths in series / at DC-12		
• at 24 V / rated value	A	10
• at 60 V / rated value	A	10
• at 110 V / rated value	A	4
• at 220 V / rated value	A	2
• at 440 V / rated value	A	1.3
• at 600 V / rated value	A	0.65
• with 3 current paths in series / at DC-12		
• at 24 V / rated value	A	10
• at 60 V / rated value	A	10
• at 110 V / rated value	A	10
• at 220 V / rated value	A	3.6
• at 440 V / rated value	A	2.5
• at 600 V / rated value	A	1.8
<b>Operating current</b>		
• with 1 current path / at DC-13		
• at 24 V / rated value	A	10
• at 110 V / rated value	A	1
• at 220 V / rated value	A	0.3
• at 440 V / rated value	A	0.14
• at 600 V / rated value	A	0.1
• with 2 current paths in series / at DC-13		
• at 24 V / rated value	A	10
• at 60 V / rated value	A	3.5
• at 110 V / rated value	A	1.3
• at 220 V / rated value	A	0.9
• at 440 V / rated value	A	0.2
• at 600 V / rated value	A	0.1
• with 3 current paths in series / at DC-13		
• at 24 V / rated value	A	10
• at 60 V / rated value	A	4.7
• at 110 V / rated value	A	3
• at 220 V / rated value	A	1.2
• at 440 V / rated value	A	0.5
• at 600 V / rated value	A	0.26
<b>Off-load operating frequency</b>		
• at AC	1/h	10,000

• at DC	1/h	10,000
<b>Frequency of operation</b>		
• at AC-12 / maximum	1/h	1,000
• at AC-14 / maximum	1/h	1,000
• at AC-15 / maximum	1/h	1,000
• at DC-12 / maximum	1/h	1,000
• at DC-13 / maximum	1/h	1,000

#### Short-circuit:

<b>Design of the fuse link / for short-circuit protection of the auxiliary switch</b>		
• required		fuse gL/gG: 10 A
<b>Design of the miniature circuit breaker / for short-circuit protection of the auxiliary circuit / up to 230 V</b>		C characteristic: 6 A; 0.4 kA

#### Installation/ mounting/ dimensions:

<b>mounting position</b>		+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
<b>Mounting type</b>		screw and snap-on mounting onto 35 mm standard mounting rail
<b>Width</b>	mm	45
<b>Height</b>	mm	57.5
<b>Depth</b>	mm	73

#### Connections/ terminals:

<b>Design of the electrical connection</b>		
• for auxiliary and control current circuit		screw-type terminals
• for auxiliary contacts / finely stranded / with conductor end processing		2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
• for AWG conductors / for auxiliary contacts		2x (20 ... 16), 2x (18 ... 14), 2x 12

#### Certificates/ approvals:

## General Product Approval



CCC

CSA

UL

EG-Konf.

## Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

## Shipping Approval



ABS



BUREAU  
VERITAS



DNV



GL



LRS



PRS

## Shipping Approval

other



RINA



RMRS



VDE

[Environmental Confirmations](#)

## UL/CSA ratings:

Contact rating designation / for auxiliary contacts / according to UL

A600 / Q600

## Safety related data:

### B10 value / with high demand rate

- according to SN 31920
- note

1,000,000

With 0.3 x I<sub>e</sub>

### T1 value / for proof test interval or service life

- according to IEC 61508

a

20

### Proportion of dangerous failures

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

%

40

%

73

### Failure rate [FIT] / with low demand rate

- according to SN 31920

FIT

100

### Product function / positively driven operation to IEC 60947-5-1

Yes

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)



<http://mall.industry.siemens.com/>

Cax online generator

<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RH2131-1AU00/all>

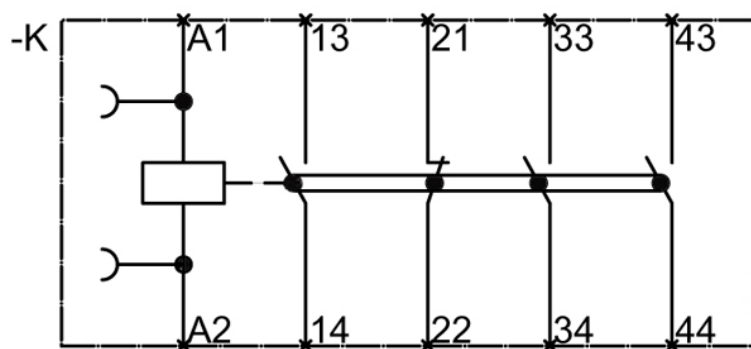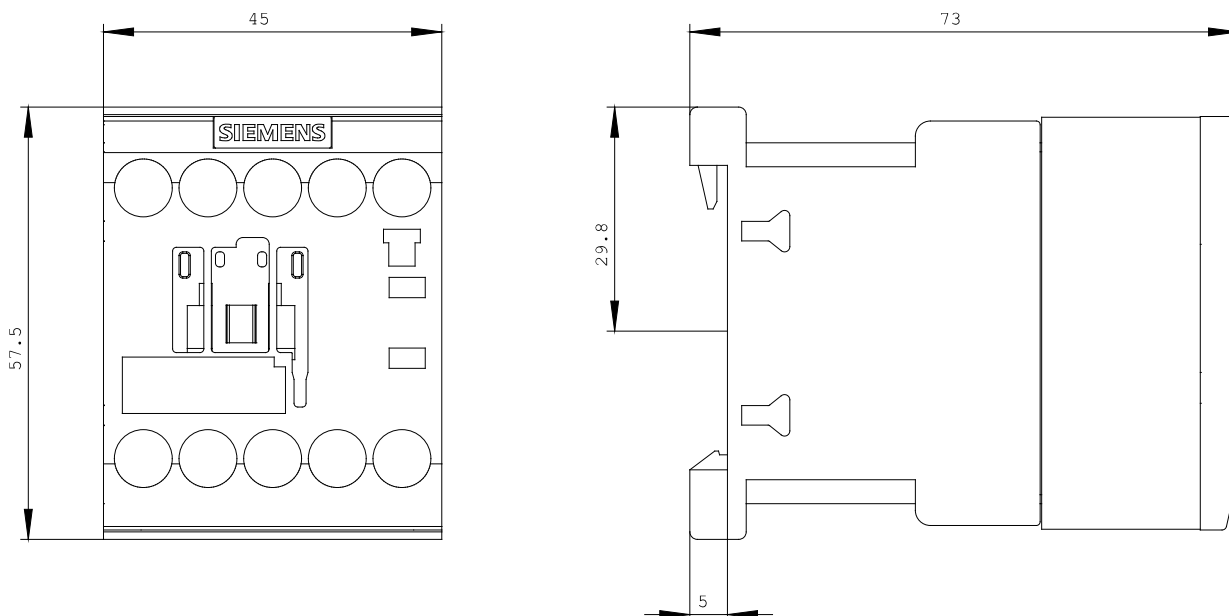

last change:

Jul 21, 2014