



ET 200PRO ERSE/RSSE HF ELECTRONIC REVERSING STARTER ELECTRONIC (SOFT) SWITCHING FULL MOTOR PROTECTION COMPRISING: ELECTRONIC OVERLOAD PROTECTION + THERMISTOR 3 AC 400V/5.5KW;
1.5A...(9A)12A BRAKE CONTACT AC 400V;
4DI HAN Q4/2 - HAN Q8/0

General technical data:

product brand name	SIRIUS
Product designation	ET 200pro motor starters
Design of the product	reversing starter
Product function	
• bus-communication	Yes
• direct start	No
• reverse starting	Yes
• on-site operation	Yes
• short circuit protection	Yes
Design of the switching contact	solid-state / thyristor / 2 phases
Product component / outlet for engine brake	Yes
Trip class	CLASS 5, 10, 20 and 30 adjustable
Type of assignment	1
Product equipment	
• brake control with 400 V AC	Yes
• brake control with 230 V AC	No
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No

Type of voltage / of the supply voltage for brake control / required		AC
Supply voltage / for brake control / required	V	400
Impulse voltage resistance / rated value	kV	6
Maximum permissible voltage for safe disconnection / between main circuit and auxiliary circuit	V	400
Reference code <ul style="list-style-type: none"> • according to DIN EN 61346-2 • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 		Q A
Mounting type		screw fixing
Depth	mm	150
Height	mm	230
Width	mm	110

Main circuit:

Operating voltage <ul style="list-style-type: none"> • rated value 	V	400 ... 500
Adjustable response current <ul style="list-style-type: none"> • of the current-dependent overload release 	A	1.5 ... 12
Operating current / at AC-3 / at 400 V / rated value	A	12
Service power <ul style="list-style-type: none"> • at AC-3 / at 400 V / rated value • for three-phase servomotors / at 400 V / at 50 Hz • minimum 	W W	5,500 700 ... 5,500
Breaking capacity limit short-circuit current (I_{cu}) / at 400 V / rated value	A	100,000
Design of the short-circuit protection		fuse
Number of poles / for main current circuit		3
Type of the motor protection		full motor protection
Mechanical operating cycles as operating time / of the main contacts / typical		30,000,000

Control circuit:

Voltage type / of control feed voltage		DC
Control supply voltage / 1 / for DC	V	24
Control supply voltage / 1 / for DC / rated value <ul style="list-style-type: none"> • permissible minimum • permissible maximum 	V V	20.4 28.8

Supply voltage:

Type of / supply voltage		DC
---------------------------------	--	----

Supply voltage / 1 / for DC	V	24
Supply voltage / 1 / for DC / rated value		
• permissible minimum	V	20.4
• permissible maximum	V	28.8

Ambient conditions:

Protection class IP		IP65
Ambient temperature		
• during operating	°C	-25 ... +55
• during storage	°C	-40 ... +70
• during transport	°C	-40 ... +70
Relative humidity		
• during operating phase	%	5 ... 95
Resistance against vibration		2g
Resistance against shock		15g / 11 ms
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	3,500
mounting position		vertical, horizontal

Communication:

Protocol / is supported		
• PROFIBUS DP protocol		Yes
• PROFINET protocol		Yes
• AS interface protocol		No
Design of the interface / PROFINET protocol		Yes
Design of the electrical connection / of the communication interface		via backplane bus

Connections:

Number of digital inputs		4
Number of sockets		
• for digital input signals		4
• for digital output signals		0
Product function		
• digital inputs parameterizable		Yes
• digital outputs parameterizable		No
Design of the electrical connection		
• 1 / for digital input signals		M12 socket
• 2 / for digital input signals		M12 socket
• 3 / for digital input signals		M12 socket
• 4 / for digital input signals		M12 socket

- at the manufacturer-specific device interface
- for main energy infeed
- for motor outgoing line
- for main energy transmission
- for supply voltage infeed
- for supply voltage transmission
- for main current circuit

optical interface
 socket according to ISO23570
 socket according to ISO23570
 socket according to ISO23570
 via backplane bus
 via backplane bus
 tab terminals

Verification of suitability

CE / UL / CSA / CCC

Protection against electrical shock

finger-safe

Certificates/approvals:

General Product Approval

Declaration of Conformity



Test Certificates

other

[Type Test Certificates/Test Report](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1304-5LS70-3AA3/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1304-5LS70-3AA3

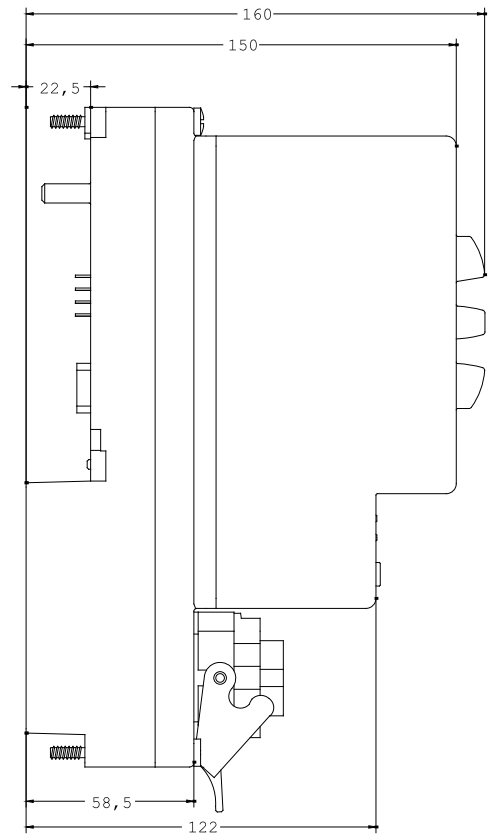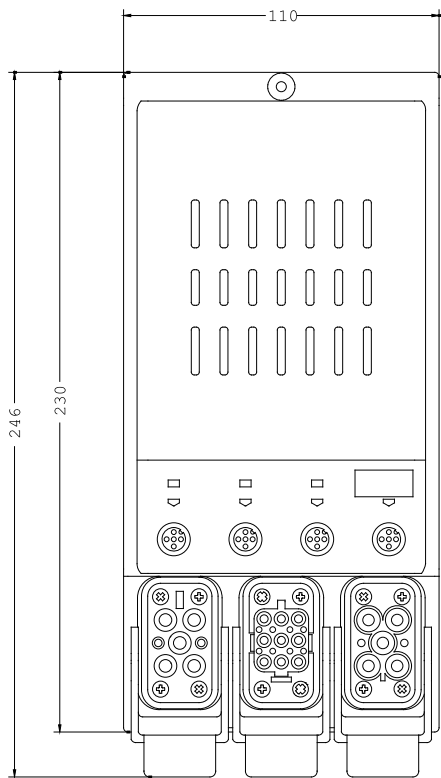

last change:

Jul 21, 2014