



SOLID-STATE TIME-DELAY RELAY MULTI-FUNCTION,
16 FUNCTIONS 2 CHANGEOVER CONTACTS AC/DC 24
TO 240V 0.05 S TO 100H WIDTH 45MM SCREW
TERMINALS

General technical data:

product brand name		SIRIUS
Product designation		timing relay
Protection class IP / of the terminal		IP20
mounting position		any
Product function		
• at the relay outputs / changeover delayed/without delay		No
Product component / semi-conductor output		No
Product extension / optional / remote control		No
Product extension / strictly required / remote control		No
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during storage	°C	-40 ... +85
• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +85
Relative humidity		
• during operating phase	%	15 ... 70
Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4		2 kV network connection / 1 kV control connection
Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5		2 kV

Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5		1 kV
Electrostatic discharge / according to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling / according to IEC 61000-4-3		10 V/m
Impulse voltage resistance / rated value	V	4,000
Active power loss / total / typical	W	2
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K
Reference code / according to DIN EN 61346-2		K
Category / according to EN 954-1		none
Protection against electrical shock		finger-safe

Switching Function:

Switching function		
• slow-operating		Yes
• making pulse contact		Yes
• relapse delayed		No
• with control signal		
• additive ON delay		Yes
• passing break contact		Yes
• OFF delay		Yes
• slow-operating/instantaneous contact		Yes
• with control signal		
• OFF delay/instantaneous		Yes
• ON delay/OFF delay/instantaneous		Yes
• making pulse contact/instantaneous contact		Yes
• with control signal		
• passing break contact/instantaneous		Yes
• pulse-shaping/instantaneous		Yes
Adjustable time	s / h	0.05 ... 100

Control circuit/ Control:

Voltage type / of control feed voltage		AC/DC
Control supply voltage frequency		
• 1	Hz	50 ... 60
Control supply voltage		
• 1		
• at 50 Hz		
• for AC	V	24 ... 240
• at 60 Hz		
• for AC	V	24 ... 240

• for DC	V	24 ... 240
Operating range factor control supply voltage rated value		
• at 50 Hz		
• for AC		0.8 ... 1.1
• at 60 Hz		
• for AC		0.8 ... 1.1
• for DC		0.85 ... 1.1

Auxiliary circuit:

Operating current / of auxiliary contacts		
• as normally closed contact / for AC-15		
• at 24 V	A	3
• at 250 V	A	3
• as normally open contact / for AC-15		
• at 24 V	A	3
• at 250 V	A	3
• at AC-15		
• maximum	A	3
• at DC-13		
• at 24 V	A	1
• at 125 V	A	0.2
• at 250 V	A	0.1
Number of NC contacts / delayed switching		0
Number of NC contacts / non-delayed		0
Number of NO contacts / delayed switching		0
Number of NO contacts / non-delayed		0
Number of change-over switches / delayed switching		2
Number of change-over switches / non-delayed		0

Short-circuit:

Design of the fuse link / for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 4 A
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail

Installation/ mounting/ dimensions:

Width	mm	45
Height	mm	57
Depth	mm	73
Distance, to be maintained, to the ranks assembly		
• upwards	mm	0
• forwards	mm	0

• sidewards	mm	0
• backwards	mm	0
• downwards	mm	0
Distance, to be maintained, to earthed part		
• backwards	mm	0
• sidewards	mm	0
• upwards	mm	0
• forwards	mm	0
• downwards	mm	0
Distance, to be maintained, conductive elements		
• downwards	mm	0
• backwards	mm	0
• sidewards	mm	0
• forwards	mm	0
• upwards	mm	0

Connections/ terminals:

Design of the electrical connection

- for auxiliary and control current circuit

screw-type terminals

General Product Approval

EMC

Declaration of Conformity

Test Certificates



[Special Test Certificate](#)

Shipping Approval



Shipping Approval

other



[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)


<http://www.siemens.com/industrial-controls/mall>

Cax online generator

<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RP2005-1BW30/all>

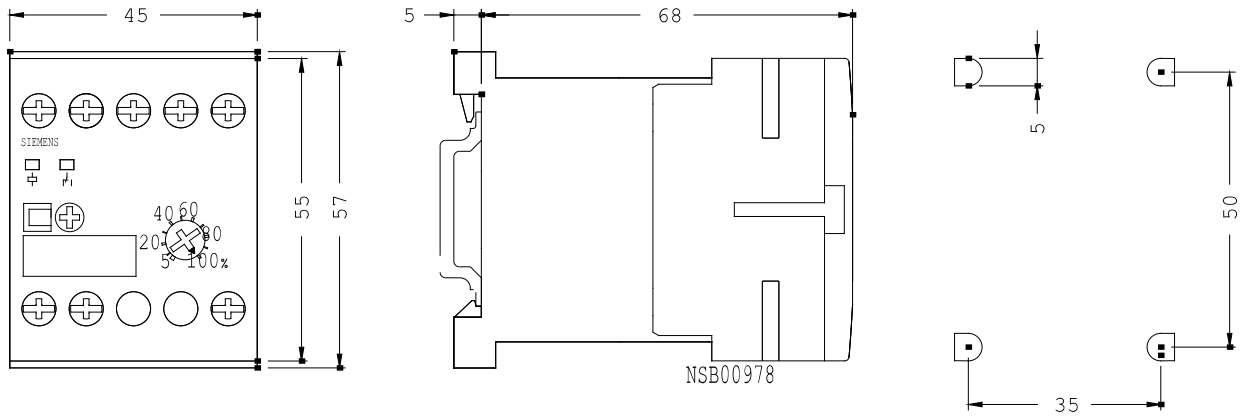

last change:

Jul 28, 2014