



CONTACTOR, AC-3 30 KW/400 V, AC 48 V,
50 HZ, 3-POLE, SIZE S3, CAGE CLAMP

General technical data:

product brand name		SIRIUS
Size of the contactor		S3
Protection class IP / on the front		IP20
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 ... +60
Mechanical operating cycles as operating time		
<ul style="list-style-type: none"> • of the contactor / typical 		10,000,000
<ul style="list-style-type: none"> • of the contactor with added auxiliary switch block / typical 		10,000,000
<ul style="list-style-type: none"> • of the contactor with added electronics-compatible auxiliary switch block / typical 		5,000,000

Main circuit:

Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operating current		
<ul style="list-style-type: none"> • at AC-1 / at 400 V <ul style="list-style-type: none"> • at 40 °C ambient temperature / rated value 	A	100
<ul style="list-style-type: none"> • at AC-3 / at 400 V / rated value 	A	65
<ul style="list-style-type: none"> • at AC-4 / at 400 V / rated value 	A	55

• with 1 current path / at DC-1	A	90
• at 24 V / rated value	A	4.5
• at 110 V / rated value		
• with 2 current paths in series / at DC-1	A	90
• at 24 V / rated value	A	90
• at 110 V / rated value		
• with 3 current paths in series / at DC-1	A	90
• at 24 V / rated value	A	90
• at 110 V / rated value		
• with 1 current path / at DC-3 / at DC-5	A	40
• at 24 V / rated value	A	2.5
• at 110 V / rated value		
• with 2 current paths in series / at DC-3 / at DC-5	A	90
• at 24 V / rated value	A	90
• at 110 V / rated value		
• with 3 current paths in series / at DC-3 / at DC-5	A	90
• at 24 V / rated value	A	90
• at 110 V / rated value		
Service power		
• at AC-2 / at 400 V / rated value	kW	30
• at AC-3 / at 400 V / rated value	kW	30
• at AC-4 / at 400 V / rated value	W	30,000

Control circuit:

Voltage type / of control feed voltage		AC
Operating range factor control supply voltage rated value / of the magnet coil		
• at 50 Hz		
• for AC		0.8 ... 1.1
Apparent pull-in power / of the solenoid / for AC	V·A	218
Apparent holding power / of the solenoid / for AC	V·A	21
Inductive power factor / with the pull-in power of the coil		0.61
Inductive power factor / with the pull-in power of the coil		0.26

Auxiliary circuit:

Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts / instantaneous switching		0
Number of NO contacts / for auxiliary contacts / instantaneous switching		0

Short-circuit:

Design of the fuse link	<ul style="list-style-type: none"> • for short-circuit protection of the auxiliary switch / required 	fuse gL/gG: 10 A
	<ul style="list-style-type: none"> • for short-circuit protection of the main circuit 	fuse gL/gG: 250 A
	<ul style="list-style-type: none"> • with type of assignment 1 / required • at type of coordination 2 / required 	fuse gL/gG: 125 A

Installation/mounting/dimensions:

Mounting type		screw and snap-on mounting onto 35 mm and 75 mm standard mounting rail
series installation		Yes
Width	mm	70
Height	mm	146
Depth	mm	139
Distance, to be maintained, to earthed part / sideways	mm	6

Connection type:

Design of the electrical connection	<ul style="list-style-type: none"> • for main current circuit 	screw-type terminals
	<ul style="list-style-type: none"> • for auxiliary and control current circuit 	Cage Clamp terminals
Type of the connectable conductor cross-section	<ul style="list-style-type: none"> • for main contacts 	
	<ul style="list-style-type: none"> • solid 	2x (2.5 ... 16 mm ²)
	<ul style="list-style-type: none"> • stranded 	2x (10 ... 50 mm ²)
	<ul style="list-style-type: none"> • finely stranded 	
	<ul style="list-style-type: none"> • with conductor end processing 	2x (2.5 ... 35 mm ²)
	<ul style="list-style-type: none"> • without conductor final cutting 	2x (10 ... 35 mm ²)
	<ul style="list-style-type: none"> • for AWG conductors / for main contacts 	2x (10 ... 1/0)
<ul style="list-style-type: none"> • for auxiliary contacts 	<ul style="list-style-type: none"> • solid 	2x (0.25 ... 2.5 mm ²)
	<ul style="list-style-type: none"> • finely stranded 	
	<ul style="list-style-type: none"> • with conductor end processing 	2x (0.25 ... 1.5 mm ²)
	<ul style="list-style-type: none"> • without conductor final cutting 	2x (0.25 ... 2.5 mm ²)
	<ul style="list-style-type: none"> • for AWG conductors / for auxiliary contacts 	2x (24 ... 14)

Certificates/approvals:

General Product Approval	Functional Safety / Safety of Machinery	Declaration of Conformity
---------------------------------	--	----------------------------------



CCC



CSA



UL

[Type Examination](#)



EG-Konf.

Test Certificates

[Special Test Certificate](#)

Shipping Approval



ABS



GL



LRS



RINA



RMRS

other

[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1044-3AH00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1044-3AH00

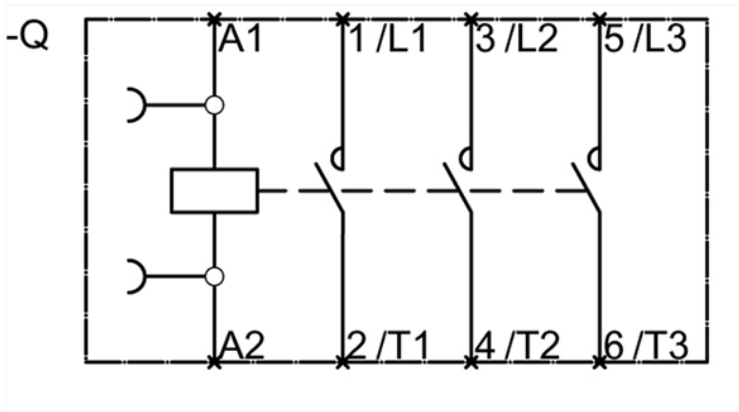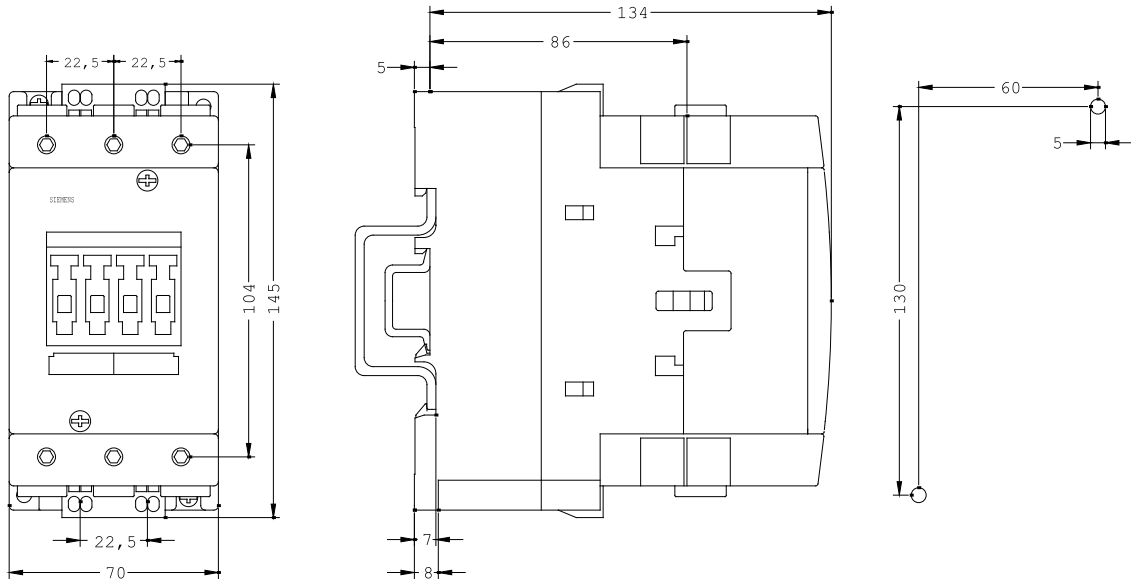

last change:

Jul 28, 2014