



CONTACTOR RELAY 55E EN 50 011 5NO+5NC,1
O'LAP,SCREW TERMIN. DC OPERATION DC SOLENOID
SYSTEM DC 24V

General details:		
Size of the contactor		0
Ambient temperature		
• during operating	°C	-25 ... +55
Protection class IP / on the front		IP20
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K
• according to DIN EN 61346-2		K
• according to DIN EN 81346-2		K
Control circuit:		
Voltage type / of control feed voltage		DC
Control supply voltage		
• for DC / rated value	V	24
Auxiliary circuit:		
Operating current / at AC-15		
• at 230 V / rated value	A	10
• at 400 V / rated value	A	6
Identification number and letter for switching elements		55 E, 1U

Number of NC contacts / for auxiliary contacts		4
• lagging switching		1
• delayed switching		0
• asynchronous switching		1
Number of NO contacts / for auxiliary contacts		4
• leading switching		1
• delayed switching		0
• asynchronous switching		1
Number of changeover contacts / for auxiliary contacts		0

Connection type:

Design of the electrical connection / for auxiliary and control current circuit

screw-type terminals

Mechanical design:

Mounting type

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

Width

mm 55

Height

mm 78

Depth

mm 135

Certificates/approvals:

General Product Approval

Functional Safety / Safety of Machinery



CCC



CSA



UL

[Type Examination](#)

Test Certificates

[other](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



DNV



GL



LRS



RMRS

other

[Declaration of Conformity](#)

[other](#)

[Environmental Confirmations](#)

Safety:

Protection against electrical shock

finger-safe

B10 value / with high demand rate

• according to SN 31920

1,000,000

• note

With 0.3 x I_e

T1 value / for proof test interval or service life / according to IEC 61508

a

20

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3TH4394-0BB4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TH4394-0BB4

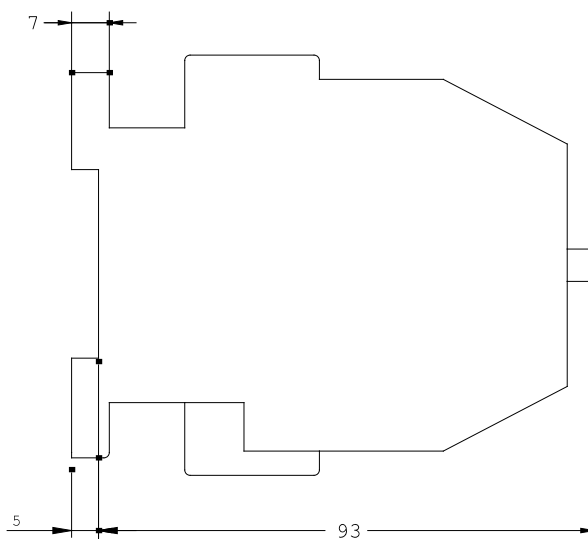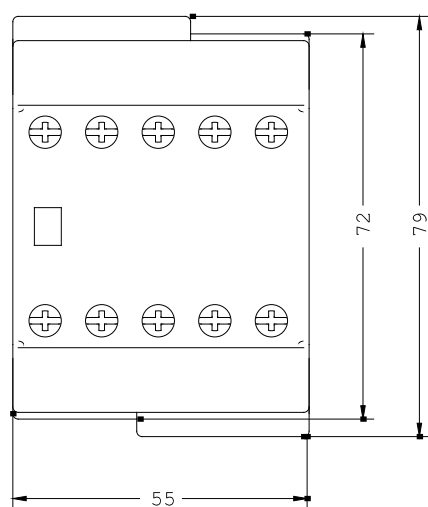

last change:

Jun 16, 2014