

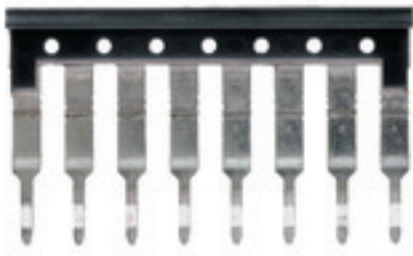
ZQV 2.5N/8 SW**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Version	Z-series, Cross-connector, For the terminals, Number of poles: 8
Order No.	1718140000
Type	ZQV 2.5N/8 SW
GTIN (EAN)	4008 190349585
Qty.	20 pc(s).

Creation date March 24, 2021 10:21:27 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

ZQV 2.5N/8 SW

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	23 mm	Depth (inches)	0.906 inch
Height	39.5 mm	Height (inches)	1.555 inch
Net weight	5.1 g	Width	2.8 mm
Width (inches)	0.11 inch		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

Material data

Material	Wemid	Colour	black
UL 94 flammability rating	V-0		

System specifications

Version	For the terminals
---------	-------------------

Additional technical data

Explosion-tested version	Yes	Installation advice	Direct mounting
Type of fixing	Plugged		

Cross-connector

Number of cross-connected terminals	8	Rated current, multi-pole	24 A
Type	Cross-connector		

Dimensions

Pitch in mm (P)	5.1 mm
-----------------	--------

General

Installation advice	Direct mounting	Number of poles	8
---------------------	-----------------	-----------------	---

Rating data

Rated current	24 A
---------------	------

Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ECLASS 9.0	27-14-11-40	ECLASS 9.1	27-14-11-40
ECLASS 10.0	27-14-11-40	ECLASS 11.0	27-14-11-40

Important note

Product information	Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400VThe voltage reduced to 25V if cut cross connection with blank cut edges are used
---------------------	---

Data sheet**ZQV 2.5N/8 SW****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Approvals**

ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
User Documentation	StorageConditionsTerminalBlocks