

**BLF/SLF 5.08 ZE06 BK****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Similar to illustration****For frequent load changes: the "trailer coupling" for plug-in connectors.**

The strain relief can do more than just relieve the strain on conductors:

Simply clip onto the plug and

- bundle conductors
- guide cables
- use as a connection and disconnection aid

No damage to the connecting points, clear, tidy wiring and easy to handle.

User advantages: permanent heavy-duty connections for harsh industrial environments and convenient operation ensure improved system availability.

**General ordering data**

Version	PCB plug-in connector, Accessories, Strain relief, black (similar to RAL 9005), Number of poles: 6
Order No.	<a href="#">2525850000</a>
Type	BLF/SLF 5.08 ZE06 BK
GTIN (EAN)	4050118537116
Qty.	50 pc(s).
Product data	

Creation date April 15, 2021 11:36:20 PM CEST

Catalogue status 09.04.2021 / We reserve the right to make technical changes.

**BLF/SLF 5.08 ZE06 BK****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Depth	37 mm	Depth (inches)	1.457 inch
Height	3.3 mm	Height (inches)	0.13 inch
Net weight	0.92 g	Width	24.8 mm
Width (inches)	0.976 inch		

**Material data**

Insulating material	PA 66/6	Colour	black (similar to RAL 9005)
Storage temperature, min.	-40 °C	Storage temperature, max.	70 °C
Operating temperature, min.	-50 °C	Operating temperature, max.	100 °C
Temperature range, installation, min.	-25 °C	Temperature range, installation, max.	100 °C

**Rated data acc. to IEC**

tested acc. to standard	IEC 60664-1, IEC 61984
-------------------------	------------------------

**Packing**

VPE length	126 mm	VPE width	100 mm
VPE height	35 mm		

**Classifications**

ETIM 6.0	EC002943	ETIM 7.0	EC002943
ECLASS 9.0	27-44-04-92	ECLASS 9.1	27-44-04-92
ECLASS 10.0	27-44-04-92	ECLASS 11.0	27-46-04-02

**Important note**

IPC conformity	Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.
Notes	<ul style="list-style-type: none"> <li>• Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months</li> </ul>

**Downloads**

Brochure/Catalogue	<a href="#">Catalogues in PDF-format</a>
--------------------	--


**BLF/SLF 5.08 ZE06 BK**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany


[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Dimensioned drawing**

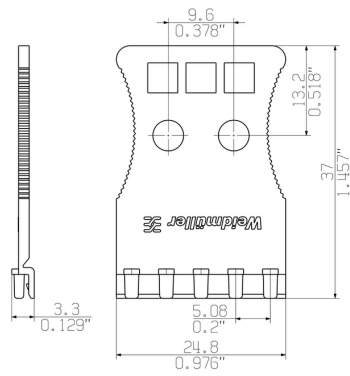

**Example of use**

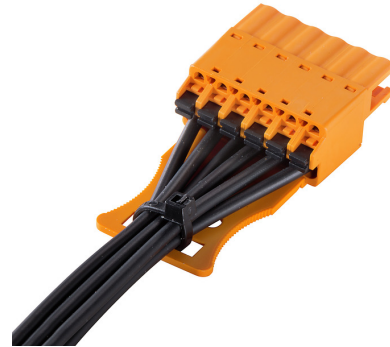

**Example of use**



**Example of use**

