

SAIL-M12WM12W-T-3.0H**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Your peripheral devices should be supplied with greater power. With our new M12 plug-in connector, more than 250 V and 2 A is possible without problems. The compact S- and T-coded M12 plug-in connectors are designed for the transmission of up to 630 V AC or 60 V DC and 12 A.

General ordering data

Version	Power cable, Connecting line, M12 / M12, Number of poles : 4, 3 m, pin, 90° - socket 90°, Shielded: No, Sheath material: PUR, Halogen: No
Order No.	2050920300
Type	SAIL-M12WM12W-T-3.0H
GTIN (EAN)	4050118442427
Qty.	1 pc(s).

Creation date March 26, 2021 10:07:56 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

SAIL-M12WM12W-T-3.0H

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight 200 g

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical specifications for cable

Acceleration	5 m/s ²	
Bending cycles	10 Mio	
Bending radius, min., moving	7.5 x cable diameter	
Bending radius, min., stationary	4 x cable diameter	
Cable length	3 m	
Colour coding	black, blue, white, brown	
Configurable cable length	No	
Core cross-section	2.5 mm ²	
Halogen	No	
Housing main material	PUR	
Insulation	PP	
Number of poles	4	
Number of poles	4	
Outer cladding in accordance with UL AWM style	20234 (80 °C / 1000 V)	
Outside diameter	Diameter	11 mm
	Signs	±
	Tolerance	0.4 mm
Outside diameter	11 mm ± 0.4 mm	
Resistant to welding beads	No	
Sheath material	PUR	
Sheathing colour	black	
Shielded	No	
Speed	5 m/s	
Suitable for cable carriers	Yes	
Temperature range, moving	-40...90 °C	
Temperature range, moving, max.	90 °C	
Temperature range, moving, min.	-40 °C	
Temperature range, stationary	-50...90 °C	
Temperature range, stationary, max.	90 °C	
Temperature range, stationary, min.	-50 °C	

General technical data

Coding	T	Connection thread	M12 / M12
Contact surface	Gold-plated	Housing main material	PUR
Insulation strength	10 ⁸ Ω	Plugging cycles	≥ 100
Pollution severity	3	Protection degree	IP67, when screwed in
Rated current	12 A	Rated voltage	63 V
Temperature range of housing	-25...+80 °C	Version	pin, 90°; - socket 90°

Standards

Connector standard IEC 61076-2-111

Creation date March 26, 2021 10:07:56 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

SAIL-M12WM12W-T-3.0H

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data**Classifications**

ETIM 6.0	EC001855	ETIM 7.0	EC001855
ECLASS 9.0	27-06-03-11	ECLASS 9.1	27-06-03-11
ECLASS 10.0	27-06-03-11	ECLASS 11.0	27-06-03-11

Approvals

ROHS	Conform
------	---------


SAIL-M12WM12W-T-3.0H

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Drawings


Dimensioned drawing

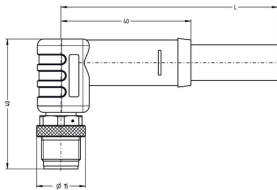


Dimensioned drawing




Pole scheme

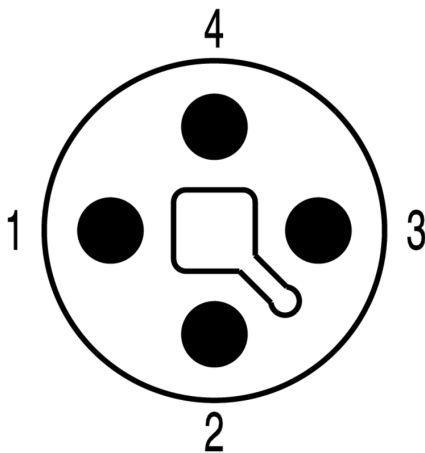

Pole scheme

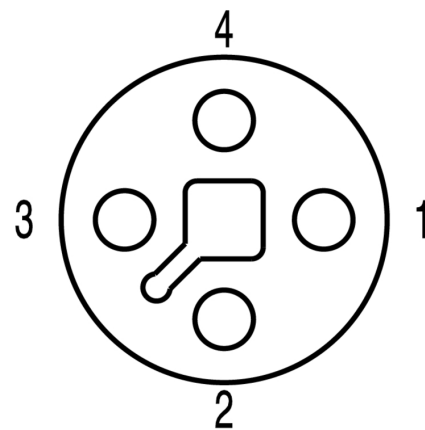

Wiring diagram

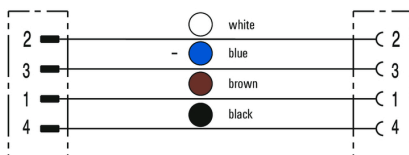

The ideal tool: Screwty® with torque function

