

**HDC-C-M3-SM6.0AG****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Crimps provide a electrical and mechanical connection between wire and contact that is both secure and reliable. The optimal crimp connection is gas-tight and corrosion-resistant.

**General ordering data**

Version	Heavy-duty connectors, Crimp contact, CM 3, Pin, Conductor cross-section, max.: 6, turned, Copper alloy
Order No.	<a href="#">1682280000</a>
Type	HDC-C-M3-SM6.0AG
GTIN (EAN)	4008190474010
Qty.	100 pc(s).

Creation date March 24, 2021 7:14:21 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**HDC-C-M3-SM6.0AG****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Diameter	6.1 mm	Net weight	3.52 g
----------	--------	------------	--------

**Environmental Product Compliance**

REACH SVHC	Lead 7439-92-1
------------	----------------

**General data**

Conductor cross-section, max.	6 mm <sup>2</sup>	Contact diameter, male Ø	3.6 mm
Cross-section for connected wire	6 mm <sup>2</sup>	Material	Copper alloy
Production methods	turned	Stripping length, rated connection	10 mm
Surface finish	silver	Type	Pin
Type of connection	Crimp connection	Version insert	CM 3
Volume resistance	≤1 mΩ		

**Classifications**

ETIM 6.0	EC000796	ETIM 7.0	EC000796
ECLASS 9.0	27-44-02-04	ECLASS 9.1	27-44-02-04
ECLASS 10.0	27-44-02-04	ECLASS 11.0	27-44-02-04

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	E92202

**Downloads**


Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>

**HDC-C-M3-SM6.0AG**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

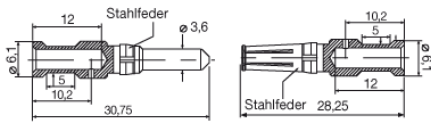

Leiterquerschnitt	Abisolierlänge	
1,50 mm <sup>2</sup>	AWG 16	10 mm
2,50 mm <sup>2</sup>	AWG 14	10 mm
4,00 mm <sup>2</sup>	AWG 12	10 mm
6,00 mm <sup>2</sup>	AWG 10	10 mm
10,00 mm <sup>2</sup>	AWG 7	10 mm

